
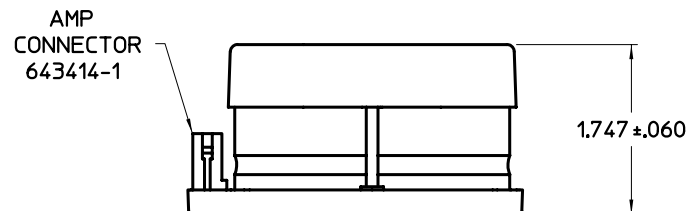
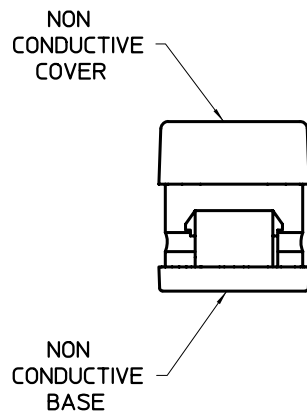


VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
01	RELEASED PER E980365 DPK	9/14/98	RCM
02	REVSD- E980451 RCM	12/1/98	DPK
03	REVSD PER E990386 AK	9/14/99	RCM
04	REVSD PER E990450 RCM	3/6/00	DPK

VICOR HUB PART NO.	MATING CONNECTOR		
	ORDER FROM: AMP		ORDER FROM: VICOR
	HOUSING (QTY 1)	PINS (QTY 3)	HOUSING/PINS KIT (QTY 1)
HUB1200-S	770018-1	770248-1	21393

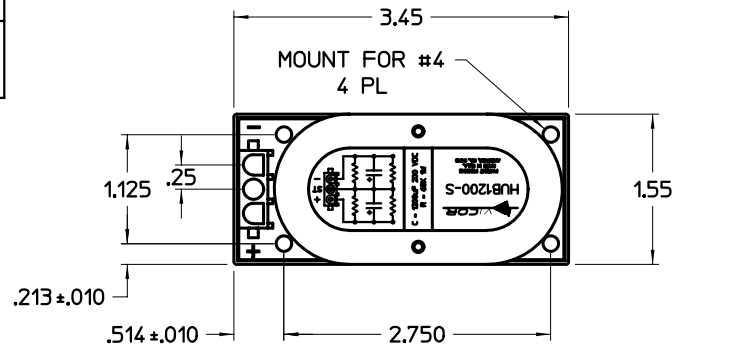

AT +105°C, 120HZ UNLESS OTHERWISE NOTED					
ITEM	CHARACTERISTICS				
OPERATING TEMPERATURE	-25 to +105°C				
CAPACITANCE TOLERANCE @ +20°C	±20%				
RIPPLE CURRENT MULTIPLIER	AMBIENT TEMPERATURE (°C)				
	+45	+60	+70	+85	+105
DISSIPATION FACTOR @ +20°C	2.64	2.23	2.12	1.73	1.00
RATED VOLTAGE (WVDC)	0.1				
CAPACITANCE VALUE (C1, C2 EA. uF)	200				
MAXIMUM ESR (OHMS) @ +20°C	1200				
MAXIMUM RIPPLE CURRENT (A rms)	0.120				
	2.50				

DRAWN BY C BUTCHERS	DATE 7/97	VICOR	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES 1/64 .001 .01 1°		OUTLINE DRAWING, HUB1200-S	
THIRD ANGLE PROJECTION	SIZE C	PSCH NO. 67131	REV 04
DO NOT SCALE DRAWING	SCALE FULL	DWG NO. 16765	SHEET 1 OF 1