
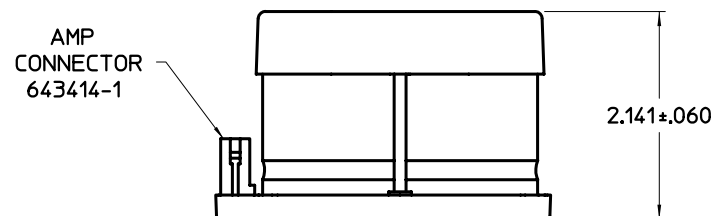
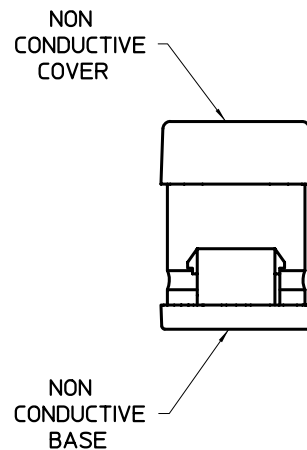


THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION		DATE	APPROVED
01	RELEASED PER E980365	DPK	9/14/98	RCM
02	RELVSÐ- E980451	RCM	12/1/98	DPK
03	REVSD PER E990386	AK	9/14/99	RCM
04	REVSD PER E990450	RCM	3/6/00	DPK

VICOR HUB PART NO.	MATING CONNECTOR		
	ORDER FROM: AMP		ORDER FROM: VICOR
	HOUSING (QTY 1)	PINS (QTY 3)	HOUSING/PINS KIT (QTY 1)
HUB1800-S	770018-1	770248-1	21393

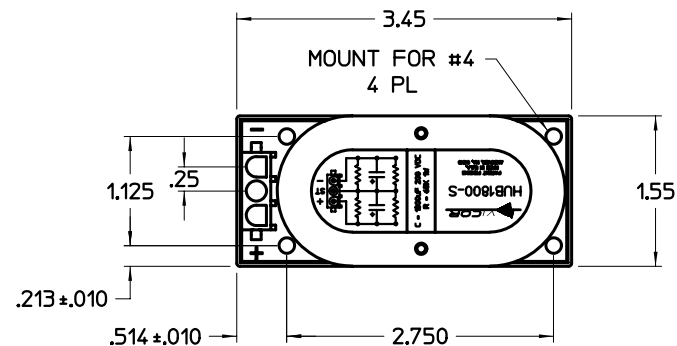

AT +105°C, 120HZ UNLESS OTHERWISE NOTED					
ITEM	CHARACTERISTICS				
OPERATING TEMPERATURE	-25 to +105°C				
CAPACITANCE TOLERANCE @+20°C	±20%				
RIPPLE CURRENT MULTIPLIER	AMBIENT TEMPERATURE (°C)				
	+45	+60	+70	+85	+105
	2.64	2.23	2.12	1.73	1.00
DISSIPATION FACTOR @ +20°C	0.1				
RATED VOLTAGE (WVDC)	200				
CAPACITANCE VALUE (C1, C2 EA. µF)	1800				
MAXIMUM ESR (OHMS) @ +20°C	0.087				
MAXIMUM RIPPLE CURRENT (A rms)	3.30				

DRAWN BY C HUTCHINS		DATE 7/97	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. FRACTIONS DECIMALS ANGLES 1/16 0.0625 0.01 0.125 0.0005 0.005			
THIRD ANGLE PROJECTION			
		OUTLINE DRAWING, HUB1800-S	
DO NOT SCALE DRAWING		SIZE C FSCH NO. 67131	DWG NO. 16766
		SCALE FULL	SHEET 1 OF 1
		REV 04	