


**Bothhand USA    email:sales@bothhandusa.com    http://www.bothhandusa.com**  
**10/100 BASE-T TRANSFORMER**  
**P/N:16PT8520E DATA SHEET**

**Feature**





- Designed for 10/100 MB/s transmission over UTP-5 cable.
- Cable interface for isolation and low common mode emissions.
- 16-PIN DIP package for economic cost.
- Storage temperature range: -25°C to +105°C.
- Operating Temperature range: 0°C to +70°C.

Electrical Specifications @ 25°C							
Part Number	Turns Ratio (±5%)		OCL (uH Min) @ 100KHz/0.1Vrms with 8mA/DC Bias	CW/W (pF Max)	L.L (uH Max)	DCR (Ω Max)	Hi-POT (Vrms)
	TX	RX					
16PT8520E	1CT:1CT	1:1	350	28	0.6	0.9	1500
Continue							
Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)				Cross talk (dB Min)	DCMR (dB Min)
		0.3-100 MHz	0.5-30MHz	40MHz	50MHz		
16PT8520E	-1.1	-16	-15	-13	-11	-35	-30

**Schematic**

**Mechanical**

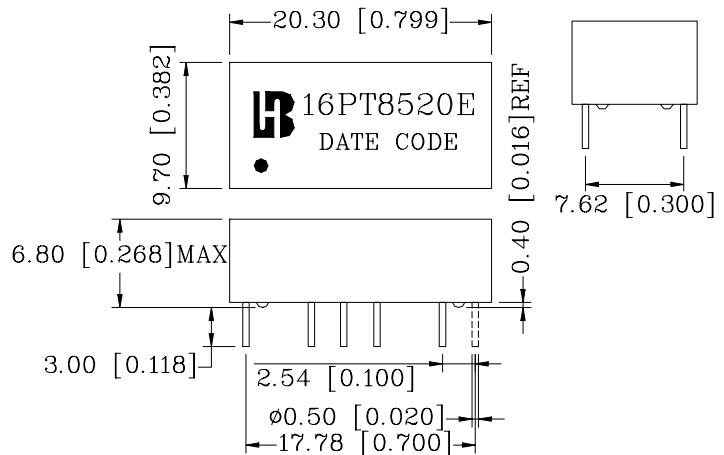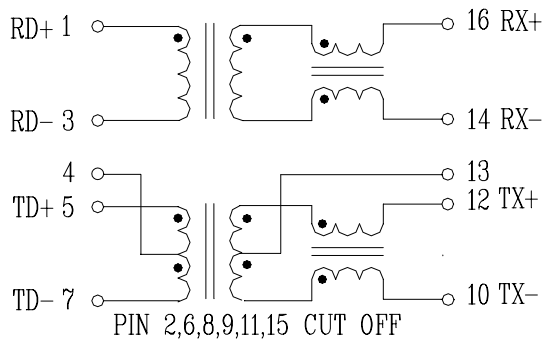

Units: mm[Inches]  
Tolerances: xx.x0±0.25[0.010]  
0.xx±0.05[0.002]