


Bothhand USA email:sales@bothhandusa.com http://www.bothhandusa.com
10/100 BASE-T TRANSFORMER
P/N:16PT8521X DATA SHEET

Feature




- Operating Temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +105°C.


Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)		OCL (uH Min) @ 100KHz/0.1Vrms with 8mA/DC Bias	C _{WW} (pF Max)	L.L (uH Max)	Rise Time (10-90%) nS TYP	HI-POT (Vrms)
	TX	RX					
16PT8521X	1CT:1CT	1CT:1CT	350	56	0.4	2.5	1500
Continue							
Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)					DCMR (dB Min) TX/RX
	0.3-100 MHz	30MHz	40MHz	50MHz	60MHz	80MHz	0.3-100MHz
16PT8521X	-1.15	-16	-14	-13.5	-13	-12	-35
							-30

Schematic

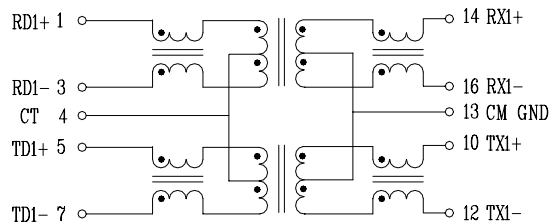

Mechanical

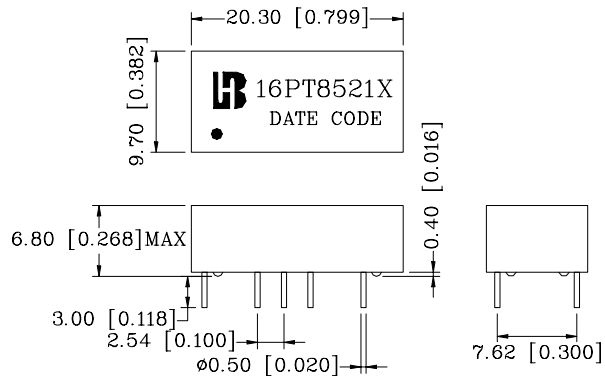

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]