


SKM 300GB128D

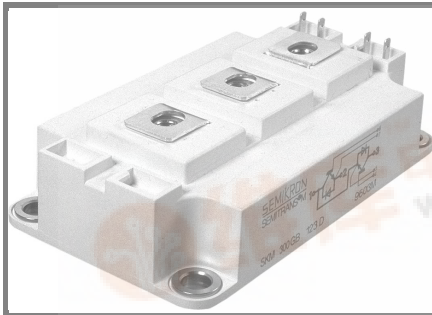

SEMITRANS™ 3

SPT IGBT Module

SKM 300GB128D


SKM 300GAL128D

Features

- Homogeneous Si
- SPT = Soft-Punch-Through technology
- V_{CEsat} with positive temperature coefficient
- High short circuit capability, self limiting to $6 \times I_C$

Typical Applications







- AC inverter drives
- UPS
- Electronic welders at f_{sw} up to 20 kHz

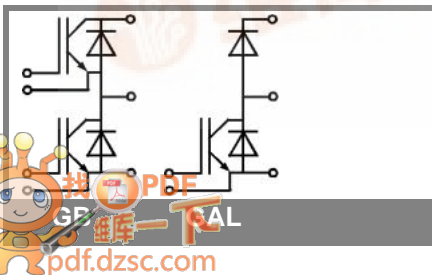







Absolute Maximum Ratings		$T_c = 25\text{ }^\circ\text{C}$, unless otherwise specified		
Symbol	Conditions	Values	Units	
IGBT				
V_{CES}		1200	V	
I_C	$T_c = 25\text{ (80) }^\circ\text{C}$	370 (265)	A	
I_{CRM}	$t_p = 1\text{ ms}$	400	A	
V_{GES}		± 20	V	
T_{vj} , (T_{stg})	$T_{OPERATION} \leq T_{stg}$	- 40 ... + 150 (125)	$^\circ\text{C}$	
V_{isol}	AC, 1 min.	4000	V	
Inverse diode				
I_F	$T_c = 25\text{ (80) }^\circ\text{C}$	260 (180)	A	
I_{FRM}	$t_p = 1\text{ ms}$	400	A	
I_{FSM}	$t_p = 10\text{ ms; sin.; } T_j = 150\text{ }^\circ\text{C}$	1800	A	
Freewheeling diode				
I_F	$T_c = 25\text{ (80) }^\circ\text{C}$	260 (180)	A	
I_{FRM}	$t_p = 1\text{ ms}$	400	A	
I_{FSM}	$t_p = 10\text{ ms; sin.; } T_j = 150\text{ }^\circ\text{C}$	1800	A	

Characteristics		$T_c = 25\text{ }^\circ\text{C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT					
$V_{GE(th)}$	$V_{GE} = V_{CE}; I_C = 8\text{ mA}$	4,5	5,5	6,5	V
I_{CES}	$V_{GE} = 0, V_{CE} = V_{CES}, T_j = 25\text{ () }^\circ\text{C}$		0,2	0,6	mA
$V_{CE(TO)}$	$T_j = 25\text{ () }^\circ\text{C}$		1 (0,9)	1,15 (1,05)	V
r_{CE}	$V_{GE} = 15\text{ V}, T_j = 25\text{ (125) }^\circ\text{C}$		4,5 (6)	6 (7,5)	m Ω
$V_{CE(sat)}$	$I_{Cnom} = 200\text{ A}, V_{GE} = 15\text{ V}$, chip level		1,9 (2,1)	2,35 (2,55)	V
C_{ies}	under following conditions		17		nF
C_{oes}	$V_{GE} = 0, V_{CE} = 25\text{ V}, f = 1\text{ MHz}$		2		nF
C_{res}			1,9		nF
L_{CE}				20	nH
$R_{CC'+EE'}$	res., terminal-chip $T_c = 25\text{ (125) }^\circ\text{C}$		0,35 (0,5)		m Ω
$t_{d(on)}$	$V_{CC} = 600\text{ V}, I_{Cnom} = 200\text{ A}$		170		ns
t_r	$R_{Gon} = R_{Goff} = 5\text{ }^\circ\Omega, T_j = 125\text{ }^\circ\text{C}$		55		ns
$t_{d(off)}$	$V_{GE} = \pm 15\text{ V}$		660		ns
t_f			60		ns
$E_{on} (E_{off})$			22 (22)		mJ
Inverse diode					
$V_F = V_{EC}$	$I_{Fnom} = 200\text{ A}; V_{GE} = 0\text{ V}; T_j = 25\text{ (125) }^\circ\text{C}$		2 (1,8)	2,5	V
$V_{(TO)}$	$T_j = 25\text{ (125) }^\circ\text{C}$		1,1	1,2	V
r_T	$T_j = 25\text{ (125) }^\circ\text{C}$		4,5	6,5	m Ω
I_{RRM}	$I_{Fnom} = 200\text{ A}; T_j = 125\text{ () }^\circ\text{C}$		280		A
Q_{rr}	$di/dt = 6300\text{ A}/\mu\text{s}$		33		μC
E_{rr}	$V_{GE} = 0\text{ V}$		11		mJ
FWD					
$V_F = V_{EC}$	$I_F = 200\text{ A}; V_{GE} = 0\text{ V}, T_j = 25\text{ (125) }^\circ\text{C}$		2 (1,8)	2,5	V
$V_{(TO)}$	$T_j = 25\text{ (125) }^\circ\text{C}$		1,1	1,2	V
r_T	$T_j = 25\text{ (125) }^\circ\text{C}$		4,5	6,5	m Ω
I_{RRM}	$I_F = 200\text{ A}; T_j = 25\text{ (125) }^\circ\text{C}$		280		A
Q_{rr}	$di/dt = 0\text{ A}/\mu\text{s}$		33		μC
E_{rr}	$V_{GE} = V$		11		mJ
Thermal characteristics					
$R_{th(j-c)}$	per IGBT		0,085		K/W
$R_{th(j-c)D}$	per Inverse Diode		0,18		K/W
$R_{th(j-c)FD}$	per FWD		0,18		K/W
$R_{th(c-s)}$	per module		0,038		K/W
Mechanical data					
M_s	to heatsink M6	3	5		Nm
M_t	to terminals M6	2,5	5		Nm
w			325		g

SKM 300GB128D

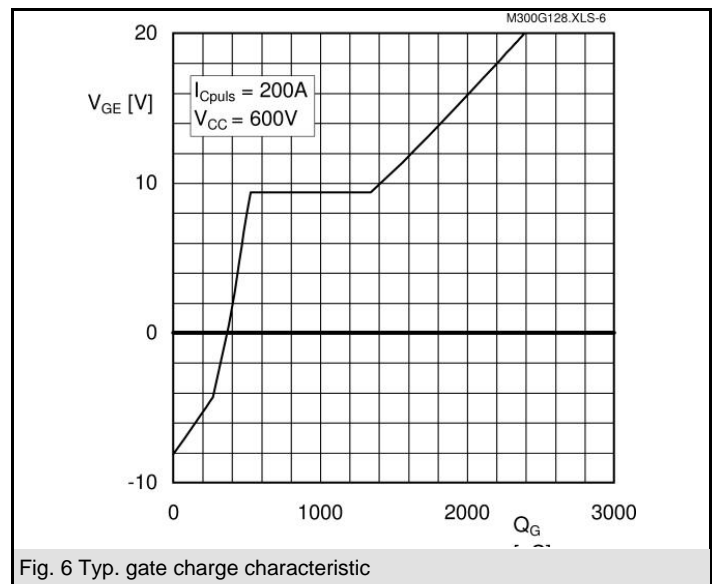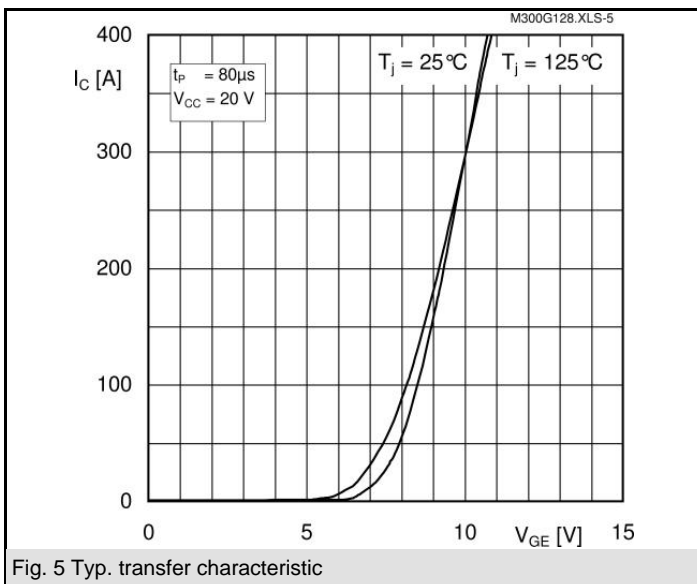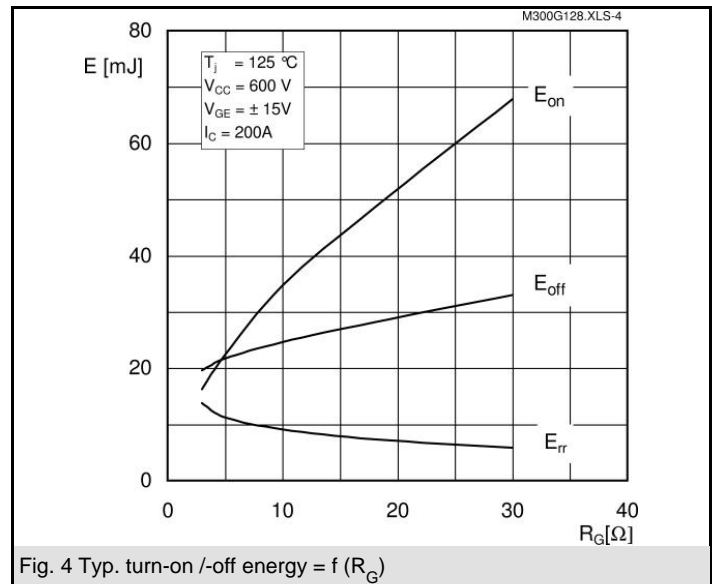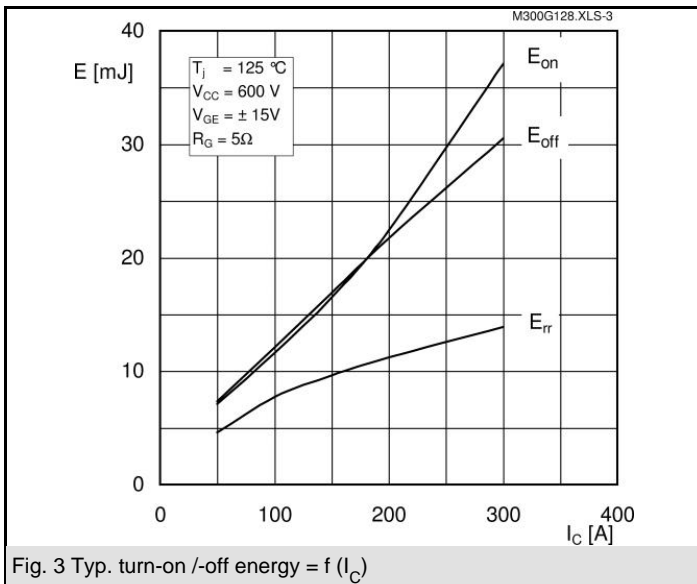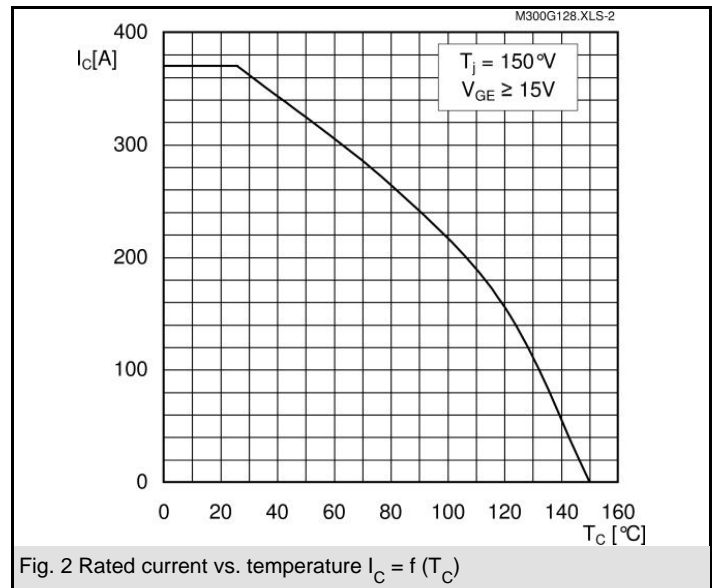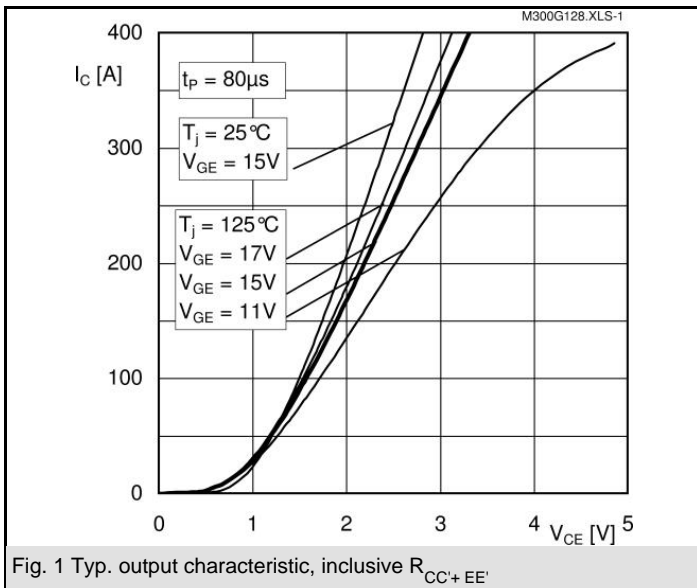

SKM 300G128D

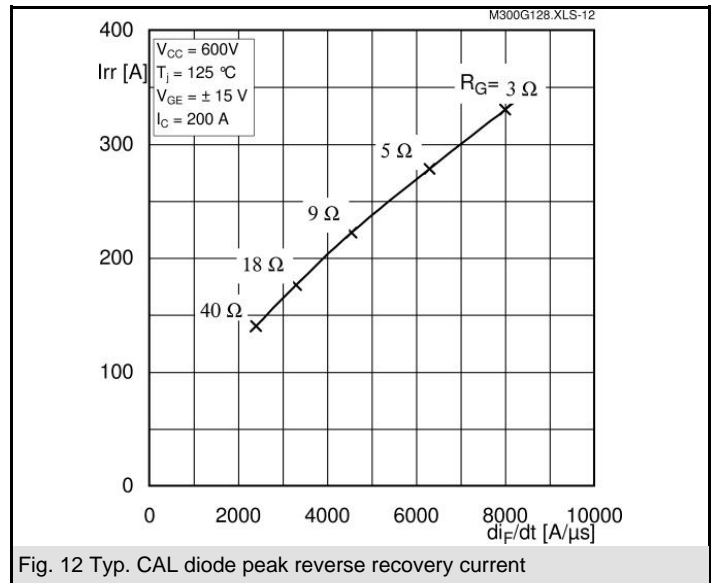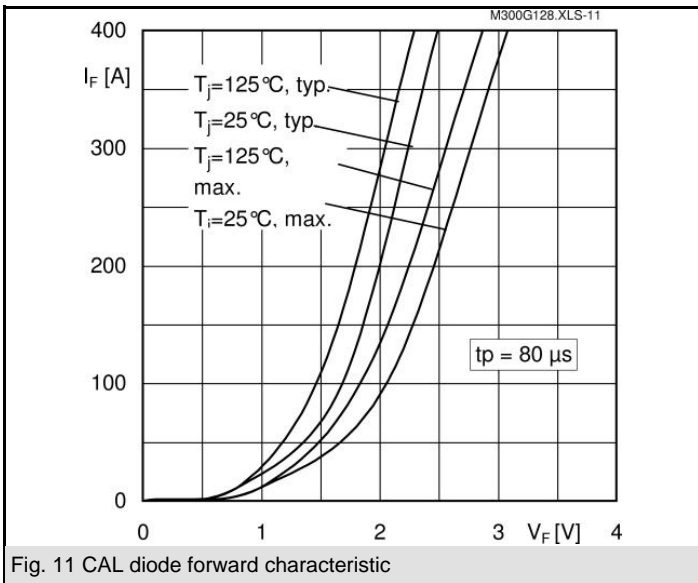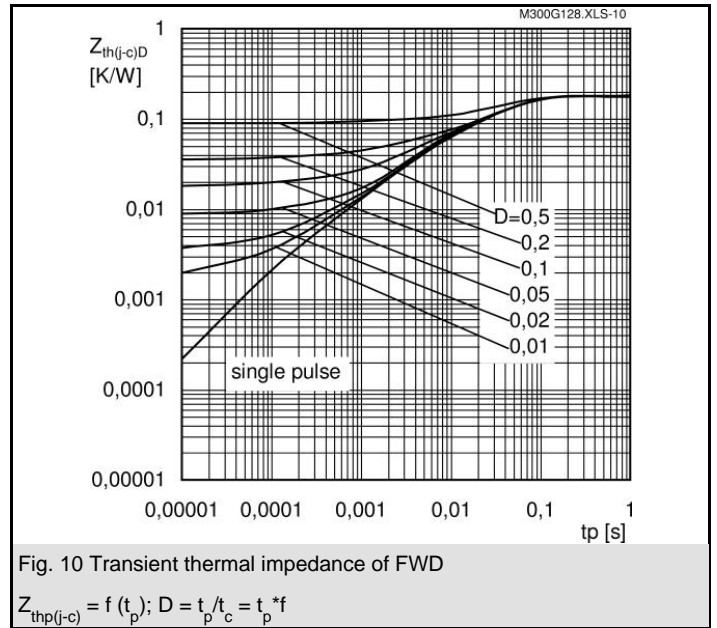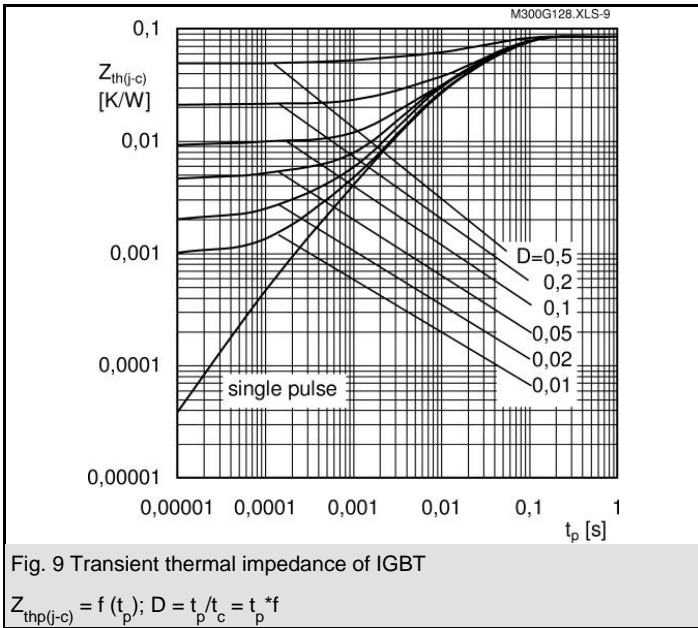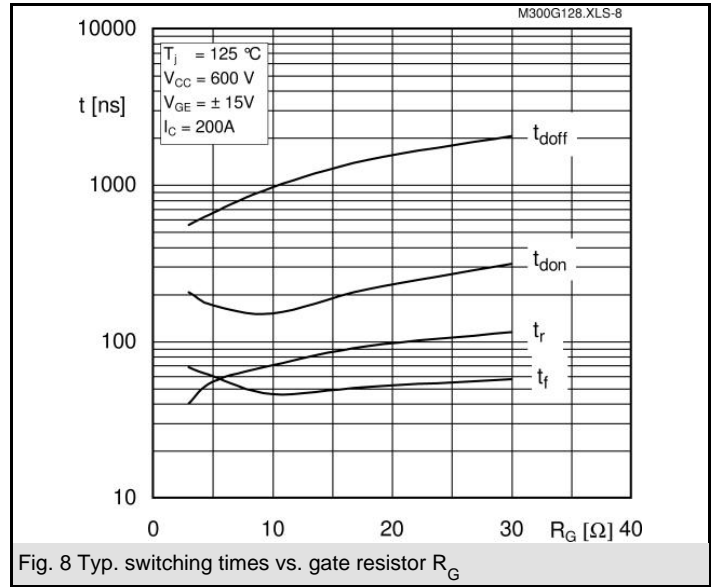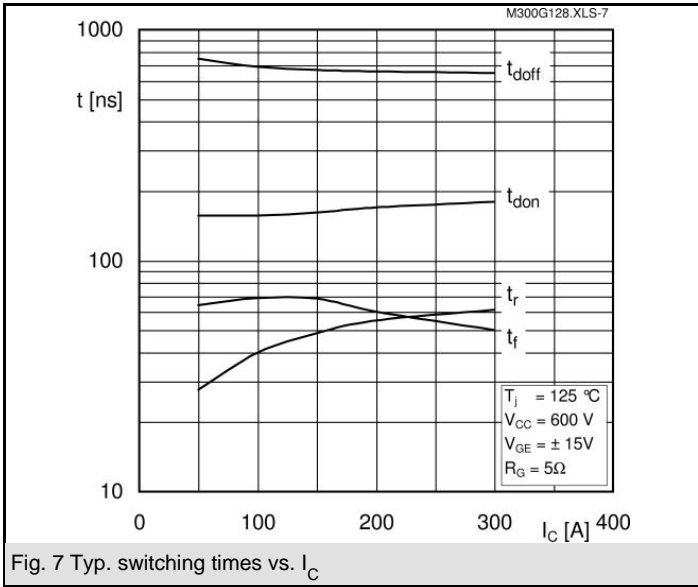

SKM 300GB128D




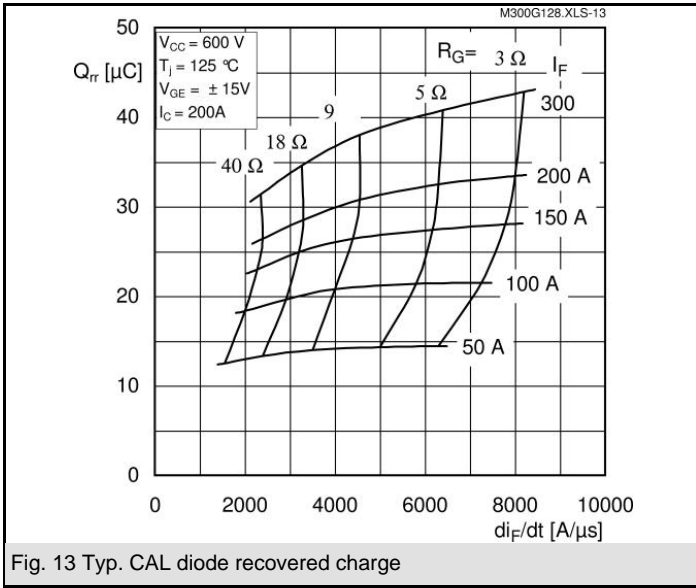


Fig. 13 Typ. CAL diode recovered charge

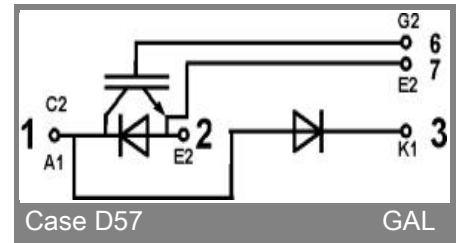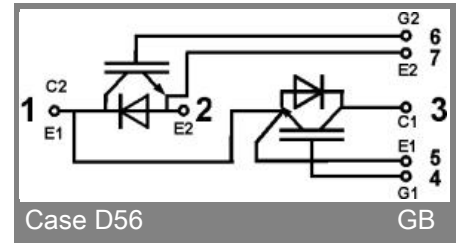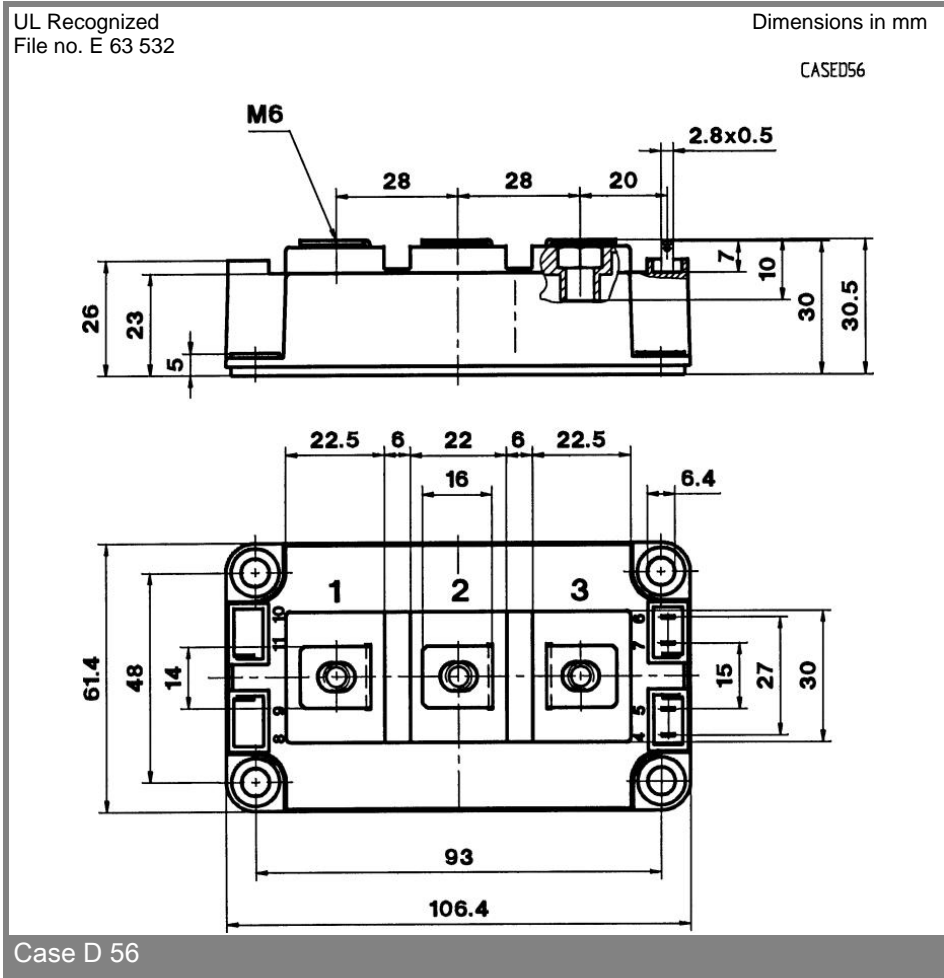

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com