

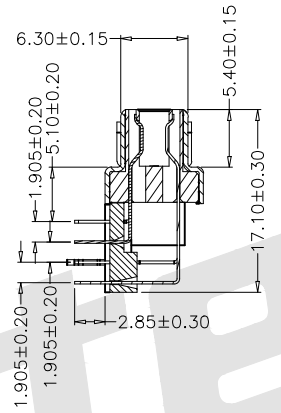
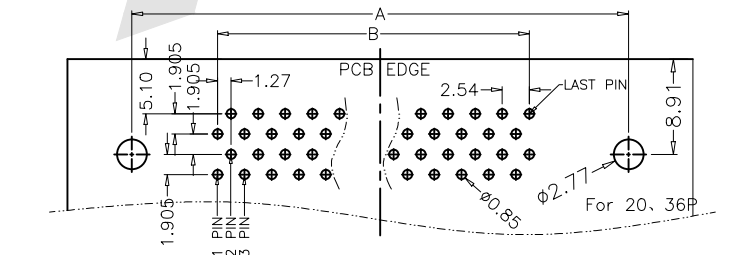
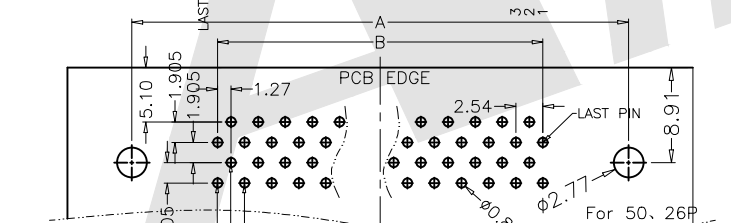
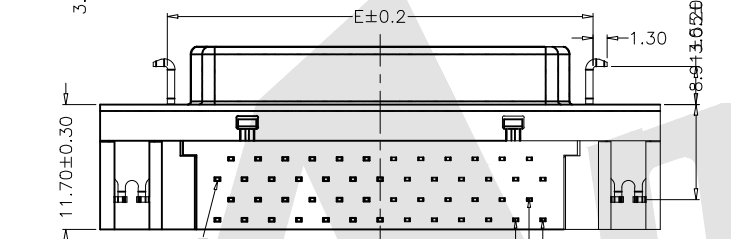


HSF

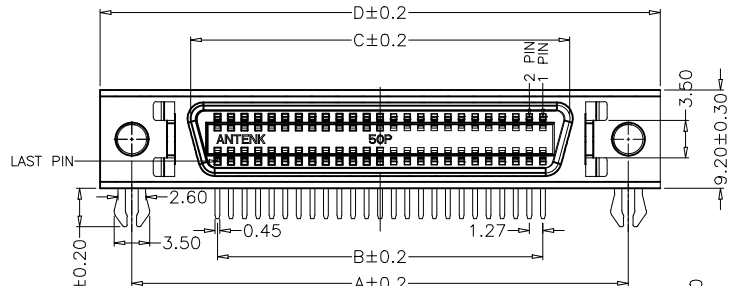

PIN	A	B	C	D	E
14P	23.64	7.62	12.7	29.57	17.35
20P	27.45	11.43	16.44	33.38	20.85
26P	31.26	15.24	20.25	37.19	24.66
36P	37.61	21.59	26.60	43.54	31.01
50P	46.50	30.48	35.49	52.43	39.90

SPECIFICATIONS:

1. Electrical Characteristics:
 - 1.1 Contact Current Rate: 1AMP
 - 1.2 Insulation Resistance: 500MΩ Minimum
 - 1.3 Contact Resistance: 25MΩ Maximum
 - 1.4 Dielectric Voltage: 500V AC For One Minute
2. Material:
 - 2.1 Insulator: PBT+30%G/F
 - 2.2 Contact: Copper Alloy T=0.30
 - 2.3 Board Lock: Copper Alloy T=0.50
 - 2.4 Shell: ZINC Alloy
3. Finish:
 - 3.1 Shell: Nickel Plated
 - 3.2 Contact: Gold Plated On Contact Area, Tin Plated On Soldering End, Nickel Under-Plating
 - 3.3 Board Lock: Nickel Plated
4. Environment:

Operation Temperature: -55° C To +125° C


Ordering Code:

HPCNSR- F - X - 3 - S1 - L
 ① ② ③ ④ ⑤ ⑥

- | | |
|--------------------------|----------------------------------|
| ① Series No: | ⑤ Contact Plating: |
| ② Contact Type: | S0: Gold Flash Selective Plating |
| F: Female | S1: 3u" Gold Selective Plating |
| ③ Contact NO.: | S2: 5u" Gold Selective Plating |
| 14=14P 20=20P | S4: 15u" Gold Selective Plating |
| 26=26P 36=36P 50=50P | S5: 30u" Gold Selective Plating |
| ④ Threaded Finishes: | ⑥ Bracket Finished: |
| 1: Threaded Insert #2-56 | L: Latch Bracket |
| 2: Threaded Insert #4-40 | |
| 3: Threaded Insert M2.6 | |

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW: TMX DATE: 11/27/2021
 CHECK: Bob Yang DATE: 11/27/2021



Antenk® ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: 1.27mm series NP Receptacle heads Right angle Mount Ribbon Type, With SPCC shell

DRAWING NO: HPCNSR-FX3S1L
 PRODUCT NO: HPCNSR-FX3S1L

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		