

Unit: mm

Recommended hole size



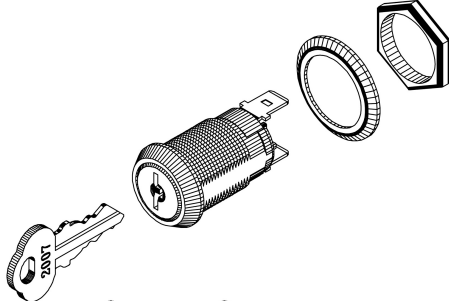





Fig.1

Fig.2

| Fig No | Lock Number | Pole | Positions | Terminals | Key Pulls | Turn | ⬆   | ➡    | Type |
|--------|-------------|------|-----------|-----------|-----------|------|-----|------|------|
| 1      | S203A-1     | 1    | 2         | 2         | 1         | 90°  | Off | On   | SPST |
| 2      | S203A-2     | 1    | 2         | 2         | 2         | 90°  | Off | On   | SPST |
| 1      | S203MA      | 1    | 2         | 2         | 1         | 90°  | Off | (On) | SPST |

| Lock Number | L1   |
|-------------|------|
| S203A       | 43.4 |
| S203AM      | 51.3 |

( ) : Momentary Contact