





MRK.	DATE	REVISION	SIGN
△			



CIRCUIT DIAGRAM

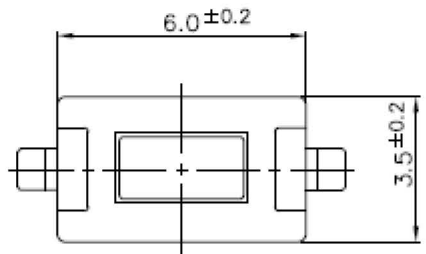


P.B.C MOUNTING HOLES

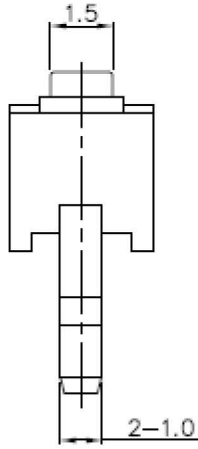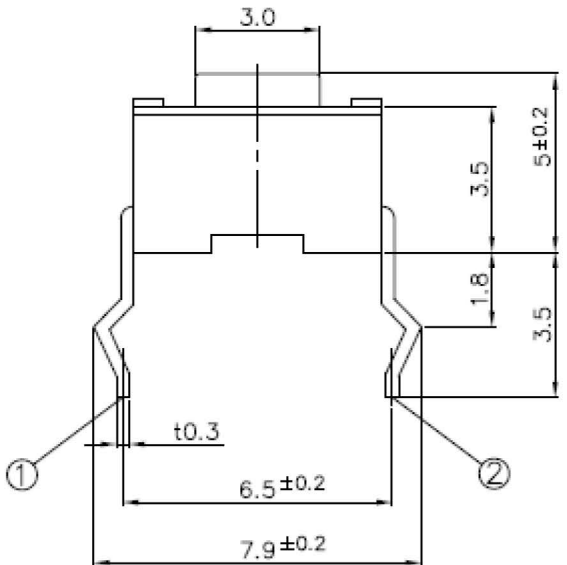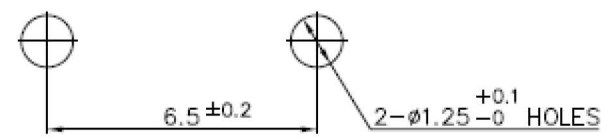

SPECIFICATION

1. RATING : DC 12V 50mA
2. TRAVEL : 0.25±0.1mm
3. CONTACT RESISTANCE : 100mΩ MAX.
4. BOUNCE : 10m SEC MAX.

MODEL	OPERATING FORCE	LIFE CYCLES
STP-1250	180±50gf	50,000 CYCLE
STP-1250W	250±50gf	30,000 CYCLE

01	-	-	-	1	-
NO.	DESCRIPTION	MATERIAL	COLOR/FINISH	Q.TY	VENDOR
W.J.LEE	J.P.ROH	K.I.LEE	 G.TOL ±0.1	TITLE TACT SWITCH	
				UNIT SCALE	MODEL
			mm 4:1	STP-1250X	