

Ø 22/25 mm Push Button Switches



S2PR Series CATALOG

For your safety, read and follow the considerations written in the instruction manual, other manuals and website.

The specifications, dimensions, etc. are subject to change without notice for product improvement. Some Models may be discontinued without notice.

Features

- Smooth operation
- High electrical conductivity
- Long-lasting durability

Safety Considerations

- Observe all 'Safety Considerations' for safe and proper operation to avoid hazards.
- ⚠ symbol indicates caution due to special circumstances in which hazards may occur.







⚠ Warning Failure to follow instructions may result in serious injury or death.

- 01. Fail-safe device must be installed when using the unit with machinery that may cause serious injury or substantial economic loss. (e.g. nuclear power control, medical equipment, ships, vehicles, railways, aircraft, combustion apparatus, safety equipment, crime / disaster prevention devices, etc.)**
Failure to follow this instruction may result in personal injury, economic loss or fire.
- 02. Do not use the unit in the place where flammable / explosive / corrosive gas, high humidity, direct sunlight, radiant heat, vibration, impact, or salinity may be present.**
Failure to follow this instruction may result in explosion or fire.
- 03. Install on a device panel to use.**
Failure to follow this instruction may result in fire or electric shock.
- 04. Do not connect, repair, or inspect the unit while connected to a power source.**
Failure to follow this instruction may result in fire or electric shock.
- 05. Do not disassemble or modify the unit.**
Failure to follow this instruction may result in fire or electric shock.






⚠ Caution Failure to follow instructions may result in injury or product damage.

- 01. This unit shall not be used outdoors.**
Failure to follow this instruction may result in shortening the life cycle of the product or electric shock.
- 02. Use the unit within the rated specifications.**
Failure to follow this instruction may result in fire or product damage.
- 03. Do not use the load beyond rated switching capacity contact.**
Failure to follow this instruction may result in fire, relay broken, contact melt, insulation failure or contact failure.
- 04. For wiring the product, do not pull the wiring excessively or apply excessive force.**
Failure to follow this instruction may result in product damage or malfunction.
- 05. Use dry cloth to clean the unit, and do not use water or organic solvent.**
Failure to follow this instruction may result in fire or electric shock.
- 06. Keep the product away from metal chip, dust, and wire residue which from flowing into the unit.**
Failure to follow this instruction may result in fire or product damage.





Specifications

Series	S2PR Series
Actuation distance	5.0 to 5.5 mm
Actuation force	0.5 kgf (4.9 N) (per 1 contact)
Installation	Extended
Shock	300 m/s ² (≈ 30 G) in each X, Y, Z direction for 3 times
Shock (malfunction)	100 m/s ² (≈ 10 G) in each X, Y, Z direction for 3 times
Vibration	1.5 mm amplitude at frequency of 10 to 55 Hz (for 1 min) in each X, Y, Z direction for 2 hours
Vibration (malfunction)	1.5 mm amplitude at frequency of 10 to 55 Hz (for 1 min) in each X, Y, Z direction for 10 minutes
Mechanical life cycle (control unit life cycle)	Returned: ≥ 1 million operations (20 operations/min)
Ambient temperature	-15 to 55 °C, storage: -25 to 65 °C (no freezing or condensation)
Ambient humidity	35 to 85 %RH, storage: 35 to 85 %RH (no freezing or condensation)
Protection structure	Control unit: IP52 (IEC standard)
Approval	CE      
Control unit weight	Round: ≈ 14.5 g, Square: ≈ 15.5 g
Housing weight	≈ 7 g

Contact blocks

Power supply / current	110 VAC~ / 10 A, 250 VAC~ / 6 A
Dielectric strength	2,500 VAC~ 50/60 Hz for 1 minute
Insulation resistance	≥ 1,000 MΩ (500 VDC== megger)
Contact resistance	≤ 20 mΩ (initial)
Electrical life cycle	≥ 100,000 operations (20 operations/min)
Contact material	AgNi10
Approval	CE     
Weight	Modular type: ≈ 10 g, Singular type: ≈ 11 g

LED blocks


Rated voltage	AC/DC voltage type: 12-24 VAC~ 50/60 Hz, 12-24 VDC== AC voltage type: 110-220 VAC~ 50/60 Hz
Current consumption	≤ 20 mA
Approval	CE    
Weight	AC/DC voltage type: ≈ 11 g, AC voltage type: ≈ 12 g

Sold Separately

- Contact blocks (SA□-C□□)
- LED blocks (SA□-L□□□)
- Switch enclosures (SA-□B□)
- Locking handle (SA□-LH)
- Switch washer (SA-SW□)
- Switch waterproof cap (SA-W□)

Assembly / Disassembly

- Assembly order: ①→②→③→④
- Disassembly order: ④→③→②→①

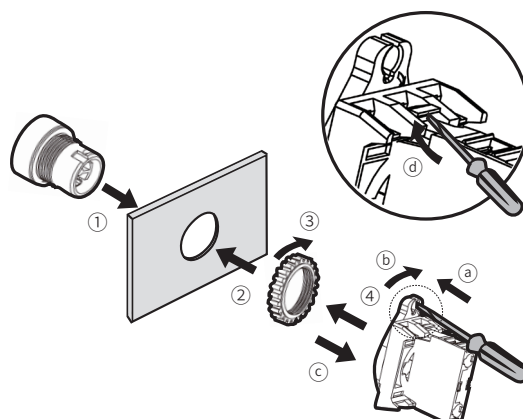

Control Switches	Panel thickness	Tightening torque
Ø 22/25/30 mm	Max. 6 mm	≤ 1.47 N·m

Ordering Information

This is only for reference. For selecting the specified Model, follow the Autonics website.
Model is based on control unit+block combination. Control units or blocks are sold separately. In case of block, refer to control switch accessories.

■ Non-illuminated

S2PR	1	-	2	1	3	4	5
Control unit						Block	

1 Appearance

No mark: Round
S: Square

2 Button type

P: Extended
E: Button extended (round)

3 Button color

R: Red
B: Blue
G: Green
Y: Yellow
K: Black

4 Contact block

A: 1 A contact
2A: 2 A contacts
3A: 3 A contacts
B: 1 B contact
2B: 2 B contacts
3B: 3 B contacts
AB: 1 A contact, 1 B contact
2AB: 2 A contacts, 1 B contact
A2B: 1 A contact, 2 B contacts

5 Block

No mark: Singular type
M: Modular type

Model	Contact block		LED block	
	A contact	B contact	AC/DC voltage	AC voltage
S2PR-P1□A(M)	1	-	-	-
S2PR-P1□2A(M)	2	-	-	-
S2PR-P1□3A(M)	3	-	-	-
S2PR-P1□B(M)	-	1	-	-
S2PR-P1□2B(M)	-	2	-	-
S2PR-P1□3B(M)	-	3	-	-
S2PR-P1□AB(M)	1	1	-	-
S2PR-P1□2AB(M)	2	1	-	-
S2PR-P1□A2B(M)	1	2	-	-
S2PR-E1□A(M)	1	-	-	-
S2PR-E1□2A(M)	2	-	-	-
S2PR-E1□3A(M)	3	-	-	-
S2PR-E1□B(M)	-	1	-	-
S2PR-E1□2B(M)	-	2	-	-
S2PR-E1□3B(M)	-	3	-	-
S2PR-E1□AB(M)	1	1	-	-
S2PR-E1□2AB(M)	2	1	-	-
S2PR-E1□A2B(M)	1	2	-	-
S2PRS-P1□A(M)	1	-	-	-
S2PRS-P1□2A(M)	2	-	-	-
S2PRS-P1□3A(M)	3	-	-	-
S2PRS-P1□B(M)	-	1	-	-
S2PRS-P1□2B(M)	-	2	-	-
S2PRS-P1□3B(M)	-	3	-	-
S2PRS-P1□AB(M)	1	1	-	-
S2PRS-P1□2AB(M)	2	1	-	-
S2PRS-P1□A2B(M)	1	2	-	-
S2PRS-P1□A(M)	1	-	-	-
S2PRS-P1□2A(M)	2	-	-	-
S2PRS-P1□3A(M)	3	-	-	-
S2PRS-P1□B(M)	-	1	-	-
S2PRS-P1□2B(M)	-	2	-	-
S2PRS-P1□3B(M)	-	3	-	-
S2PRS-P1□AB(M)	1	1	-	-
S2PRS-P1□2AB(M)	2	1	-	-
S2PRS-P1□A2B(M)	1	2	-	-

■ Illuminated

S2PR	1	2	-	3	3	4	5	6	7	8
Control unit								Block		

1 Appearance

No mark: Round
S: Square

2 Letter marking

No mark: Push (control unit + singular type block)
No mark: None (control unit + modular type block)
U: None (control unit)⁰¹⁾

3 Button type

P: Extended
E: Button extended (round)

4 Button color

R: Red
B: Blue
G: Green
Y: Yellow
W: White

5 Arrow direction (square)

No mark: No mark
L: Left/Right
U: Up/Down

6 Contact block

A: 1 A contact
2A: 2 A contacts
B: 1 B contact
2B: 2 B contacts
AB: 1 A contact, 1 B contact

7 LED block

D: 1 AC/DC voltage type
L: 1 AC voltage type

8 Block

No mark: Singular type
M: Modular type


Model	Contact block		LED block	
	A contact	B contact	AC/DC voltage	AC voltage
S2PR-P3□AD(M)	1	-	1	-
S2PR-P3□2AD(M)	2	-	1	-
S2PR-P3□BD(M)	-	1	1	-
S2PR-P3□2BD(M)	-	2	1	-
S2PR-P3□ABD(M)	1	1	1	-
S2PR-P3□AL(M)	1	-	-	1
S2PR-P3□2AL(M)	2	-	-	1
S2PR-P3□BL(M)	-	1	-	1
S2PR-P3□2BL(M)	-	2	-	1
S2PR-P3□ABL(M)	1	1	-	1
S2PR-E3□AD(M)	1	-	-	-
S2PR-E3□2AD(M)	2	-	-	-
S2PR-E3□BD(M)	-	1	1	-
S2PR-E3□2BD(M)	-	2	1	-
S2PR-E3□ABD(M)	1	1	1	-
S2PR-E3□AL(M)	1	-	-	1
S2PR-E3□2AL(M)	2	-	-	1
S2PR-E3□BL(M)	-	1	-	1
S2PR-E3□2BL(M)	-	2	-	1
S2PR-E3□ABL(M)	1	1	-	1
S2PRS-P3□AD(M)	1	-	1	-
S2PRS-P3□2AD(M)	2	-	1	-
S2PRS-P3□BD(M)	-	1	1	-
S2PRS-P3□2BD(M)	-	2	1	-
S2PRS-P3□ABD(M)	1	1	1	-
S2PRS-P3□AL(M)	1	-	-	1
S2PRS-P3□2AL(M)	2	-	-	1
S2PRS-P3□BL(M)	-	1	-	1
S2PRS-P3□2BL(M)	-	2	-	1
S2PRS-P3□ABL(M)	1	1	-	1
S2PRS-P3□LAD(M)	1	-	1	-
S2PRS-P3□L2AD(M)	2	-	1	-
S2PRS-P3□LBD(M)	-	1	1	-
S2PRS-P3□L2BD(M)	-	2	1	-
S2PRS-P3□LABD(M)	1	1	1	-
S2PRS-P3□LAL(M)	1	-	-	1
S2PRS-P3□L2AL(M)	2	-	-	1
S2PRS-P3□LBL(M)	-	1	-	1
S2PRS-P3□L2BL(M)	-	2	-	1
S2PRS-P3□LABL(M)	1	1	-	1
S2PRS-P3□UAD(M)	1	-	1	-
S2PRS-P3□U2AD(M)	2	-	1	-
S2PRS-P3□UBD(M)	-	1	1	-
S2PRS-P3□U2BD(M)	-	2	1	-
S2PRS-P3□UABD(M)	1	1	1	-
S2PRS-P3□UAL(M)	1	-	-	1
S2PRS-P3□U2AL(M)	2	-	-	1
S2PRS-P3□UBL(M)	-	1	-	1
S2PRS-P3□U2BL(M)	-	2	-	1
S2PRS-P3□UABL(M)	1	1	-	1

01) Only available for control unit. Select the block separately.


Dimensions

- Unit: mm, For the detailed drawings, follow the Autonics website.
- Panel thickness: ≤ 6 mm


■ **S2PR-P1** □ (round, non-illuminated, extended, singular type block)

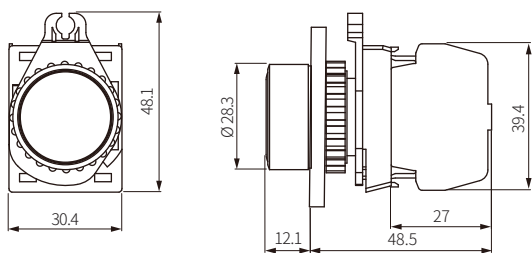


■ **S2PR-P1** □ M (round, non-illuminated, extended, modular type block)

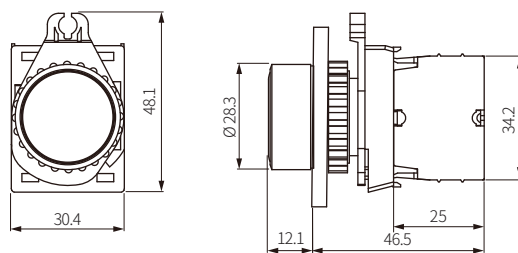


■ **S2PR-P3** □ (round, illuminated, extended, singular type block)

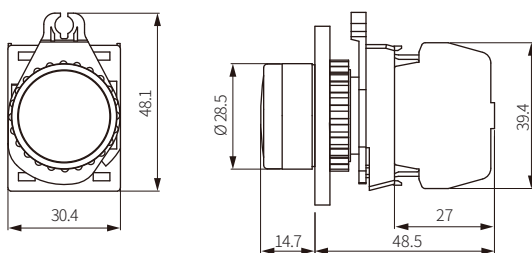


■ **S2PR-P3** □ M (round, illuminated, extended, modular type block)

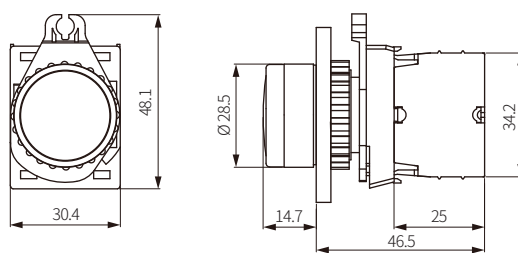


■ **S2PRS-P** □ (square, extended, singular type block)

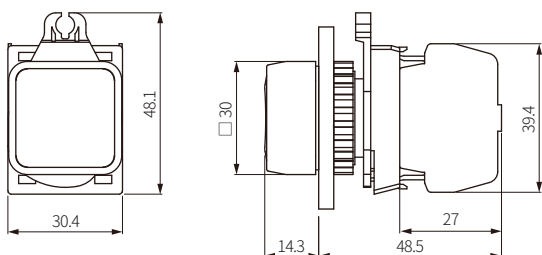


■ **S2PRS-P** □ M (square, extended, modular type block)

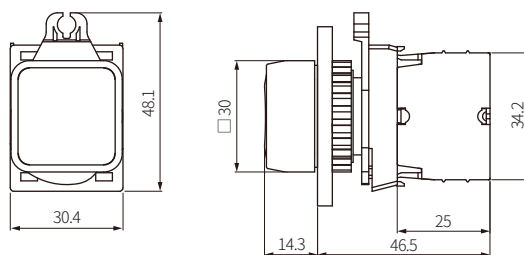

■ **S2PR-E** □ (round, button extended, singular type block)

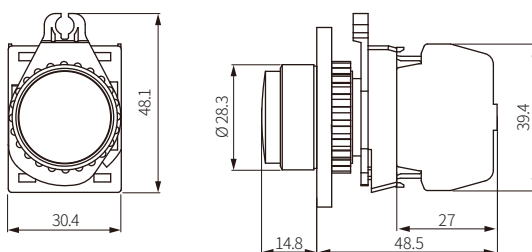

■ **S2PR-E** □ M (round, button extended, modular type block)

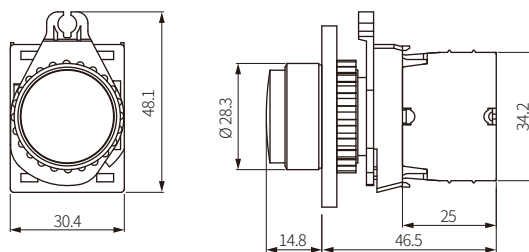

■ **Panel cut-out**

