

P.C.B LAYOUT  
TOLERANCE:±0.05

Ordering Information:

A2008WV-S1-2xXP - \*\*  
1 2

1.Part NO.


2.Finish:

(blank): Tin over Nickel

G: Gold over Nickel (Au:1u")

G15: Gold over Nickel (Au:15u", Mating Area)

G30: Gold over Nickel (Au:30u", Mating Area)

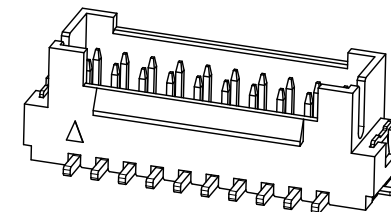

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.



Withstanding Voltage: 1000V AC/minute

PIN Material: Brass/Tin over Nickel

Material: Nylon 9T UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A2008WV-S1-2x2P	2.00	6.00	9.40	8.00
A2008WV-S1-2x3P	4.00	8.00	11.40	10.00
A2008WV-S1-2x4P	6.00	10.00	13.40	12.00
A2008WV-S1-2x5P	8.00	12.00	15.40	14.00
A2008WV-S1-2x6P	10.00	14.00	17.40	16.00
A2008WV-S1-2x7P	12.00	16.00	19.40	18.00
A2008WV-S1-2x8P	14.00	18.00	21.40	20.00
A2008WV-S1-2x9P	16.00	20.00	23.40	22.00
A2008WV-S1-2x10P	18.00	22.00	25.40	24.00
A2008WV-S1-2x11P	20.00	24.00	27.40	26.00
A2008WV-S1-2x12P	22.00	26.00	29.40	28.00
A2008WV-S1-2x13P	24.00	28.00	31.40	30.00
A2008WV-S1-2x14P	26.00	30.00	33.40	32.00
A2008WV-S1-2x15P	28.00	32.00	35.40	34.00
A2008WV-S1-2x16P	30.00	34.00	37.40	36.00
A2008WV-S1-2x17P	32.00	36.00	39.40	38.00
A2008WV-S1-2x18P	34.00	38.00	41.40	40.00
A2008WV-S1-2x19P	36.00	40.00	43.40	42.00
A2008WV-S1-2x20P	38.00	42.00	45.40	44.00

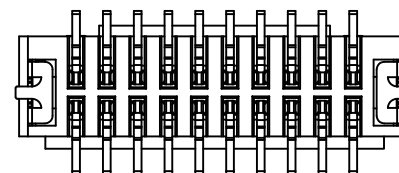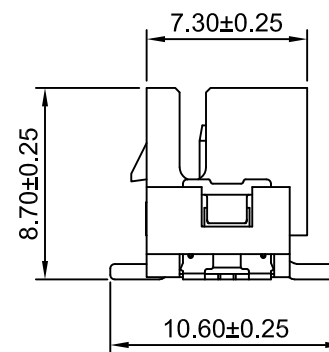

BOTTOM VIEW

**CJT** CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE
mm	3:1	1 of 1	2.00mm PITCH 180° DUAL ROW WAFER - SMD TYPE
DRWN	CHK'D	APPR	DRAWING NO.
Dengchun Yi	Dlankul Wan	Jack Yin	A2008WV-S1-2xXP
General Tolerances	THIRD ANGLE PROJECTION		REV
x.xx±0.25	THIRD ANGLE PROJECTION		A0
x.xxx±0.20	THIRD ANGLE PROJECTION		
x.xxxx±0.15	THIRD ANGLE PROJECTION		
ANGLES ±1°	THIRD ANGLE PROJECTION		

A0	NEW RELEASE	2020.11.24
REV	DESCRIPTION	DATE