



RFM Integrated Device, Inc.

PRODUCT SPECIFICATION

Part Number: SF2645J

SAW DIPLEXER, 1197.5/1584.5 MHz
(BW 63/51 MHz)

Preliminary

A. MAXIMUM RATING:

1. Input Power Level: 15 dBm
2. DC Voltage : 0 V
3. Operating Temperature: -40°C to +105°C
4. Storage Temperature: -40°C to +105°C
5. Moisture Sensitive Level: MSL 3

**B. ELECTRICAL CHARACTERISTICS:**


- Terminating source impedance (single) : $Z_s = 50 \Omega$
 Terminating load impedance (single) : $Z_L = 50 \Omega$

Item (L2+L5 Band to Antenna)	Unit	Min.	Typ.	Max.
Center frequency	MHz	-	1197.5	-
Insertion Loss (1166 ~ 1229 MHz)	dB	-	2.8	3.5
Amplitude Ripple (1166 ~ 1229 MHz)	dB(p-p)	-	0.6	2.0
Attenuation (reference level from 0 dB)				
10 ~ 925 MHz	dB	30	40	-
925 ~ 960 MHz	dB	30	35	-
1427 ~ 1463 MHz	dB	25	32	-
1574 ~ 1606 MHz (L1 Band)	dB	25	33	-
1850 ~ 1980 MHz	dB	25	30	-
Temperature Coefficient of Frequency	ppm/K	-	-36	-


Item (L1 Band to Antenna)	Unit	Min.	Typ.	Max.
Center frequency	MHz	-	1584.5	-
Insertion Loss (1559 ~ 1610 MHz)	dB	-	2.8	3.5
Amplitude Ripple (1559 ~ 1610 MHz)	dB(p-p)	-	0.5	2.0
Attenuation (reference level from 0 dB)				
10 ~ 960 MHz	dB	25	32	-
1166 ~ 1229 MHz (L2+L5 Band)	dB	30	34	-
1427 ~ 1463 MHz	dB	30	35	-
1710 ~ 1785 MHz	dB	25	30	-
1850 ~ 1910 MHz	dB	25	32	-
1910 ~ 1980 MHz	dB	30	35	-
Temperature Coefficient of Frequency	ppm/K	-	-36	-

Item (Isolation)	Unit	Min.	Typ.	Max.
Attenuation (reference level from 0 dB)				
1166 ~ 1229 MHz (L2+L5 Band)	dB	30	38	-
1574 ~ 1606 MHz (L1 Band)	dB	30	48	-
Temperature Coefficient of Frequency	ppm/K	-	-36	-


C. TEST CIRCUIT:

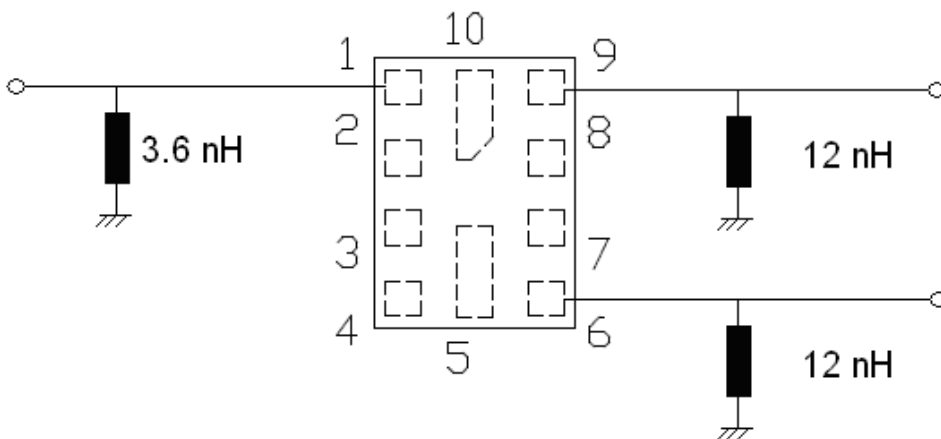

D. OUTLINE DRAWING:

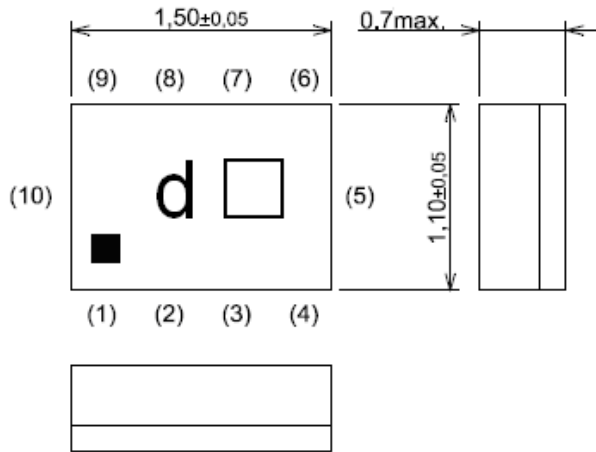


Pin #	Function
(1)	Antenna
(2)	Ground
(3)	Ground
(4)	Ground
(5)	Ground
(6)	L1 Band
(7)	Ground
(8)	Ground
(9)	L2+L5 Band
(10)	Ground

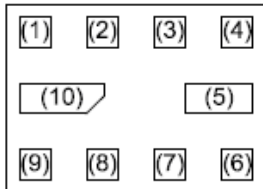


Year/Month	1	2	3	4	5	6	7	8	9	10	11	12
2021	A	B	C	D	E	F	G	H	J	K	L	M
2022	N	P	Q	R	S	T	U	V	W	X	Y	Z
2023	a	b	c	d	e	f	g	h	j	k	l	m
2024	n	p	q	r	s	t	u	v	w	x	y	z
2025	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>	<u>F</u>	<u>G</u>	<u>H</u>	<u>J</u>	<u>K</u>	<u>L</u>	<u>M</u>
2026	<u>N</u>	<u>P</u>	<u>Q</u>	<u>R</u>	<u>S</u>	<u>T</u>	<u>U</u>	<u>V</u>	<u>W</u>	<u>X</u>	<u>Y</u>	<u>Z</u>
2027	<u>a</u>	<u>b</u>	<u>c</u>	<u>d</u>	<u>e</u>	<u>f</u>	<u>g</u>	<u>h</u>	<u>j</u>	<u>k</u>	<u>l</u>	<u>m</u>
2028	<u>n</u>	<u>p</u>	<u>q</u>	<u>r</u>	<u>s</u>	<u>t</u>	<u>u</u>	<u>v</u>	<u>w</u>	<u>x</u>	<u>y</u>	<u>z</u>

E. Frequency Characteristics:


L2+L5 Pass Band

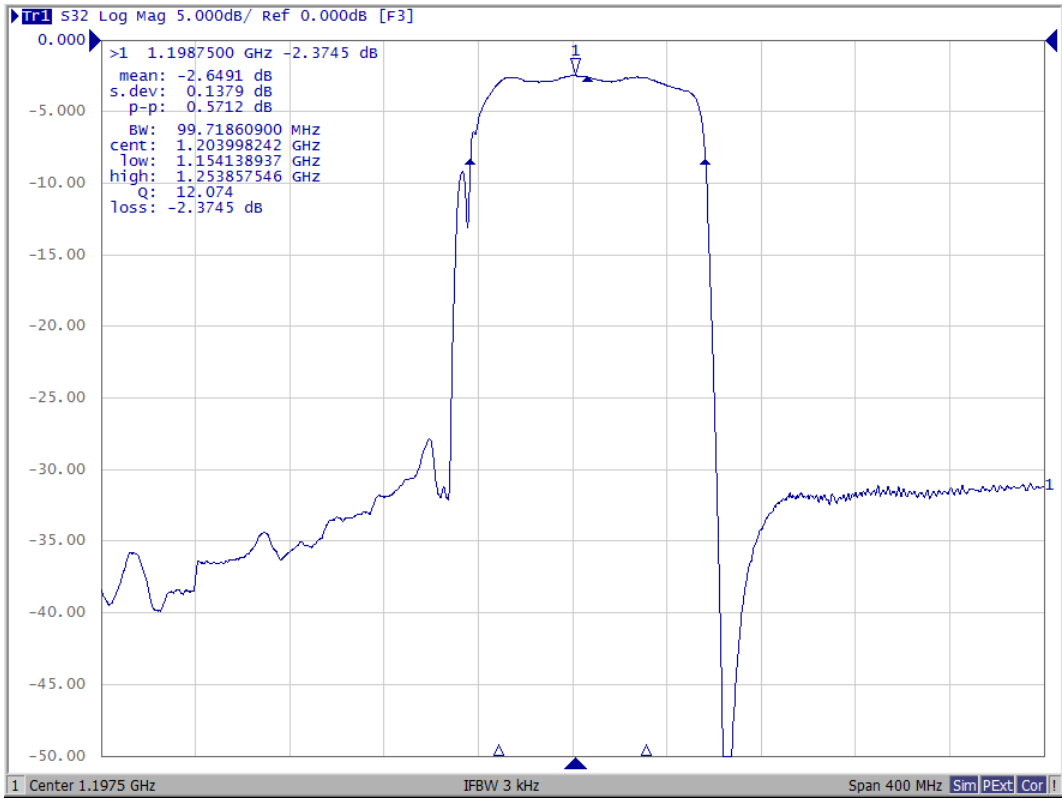


L2+L5 Full Range

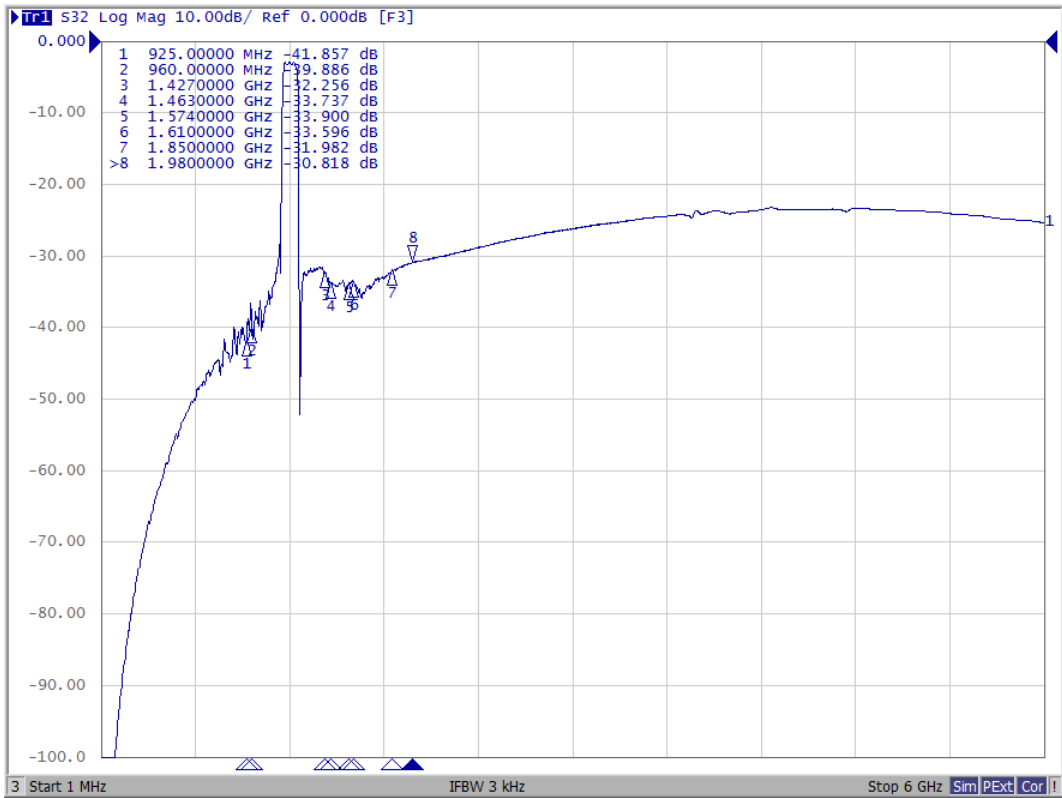


L2+L5 Reflective Characteristic

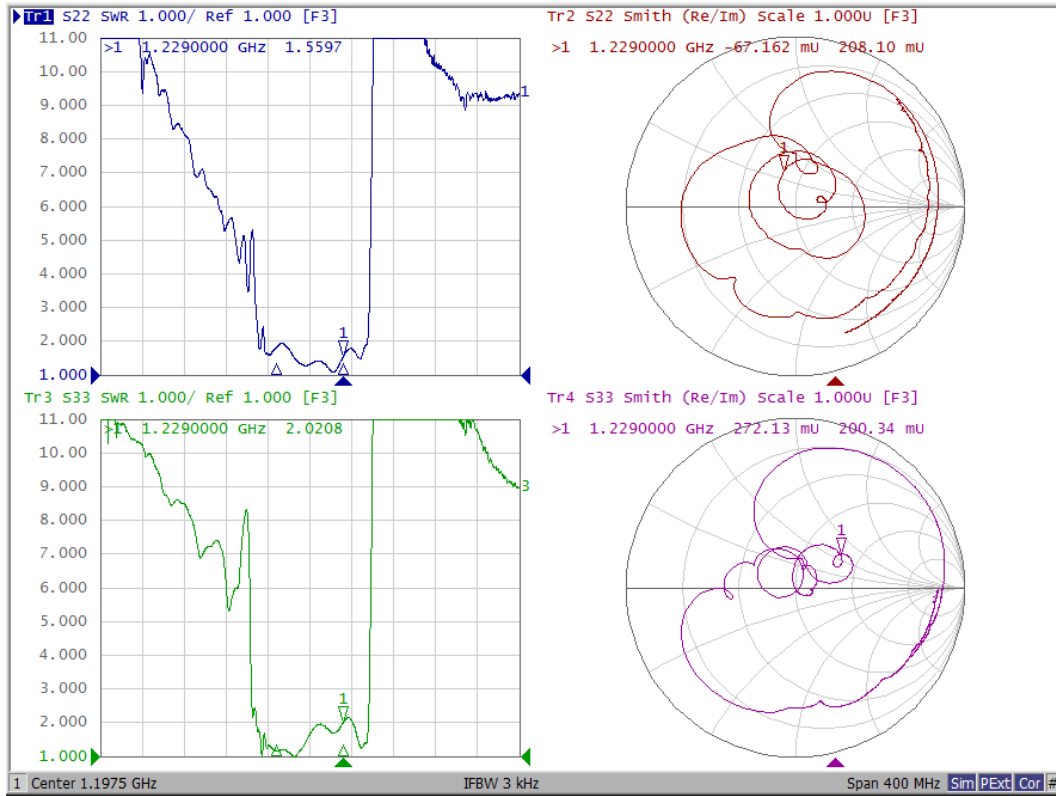


L1 Pass Band

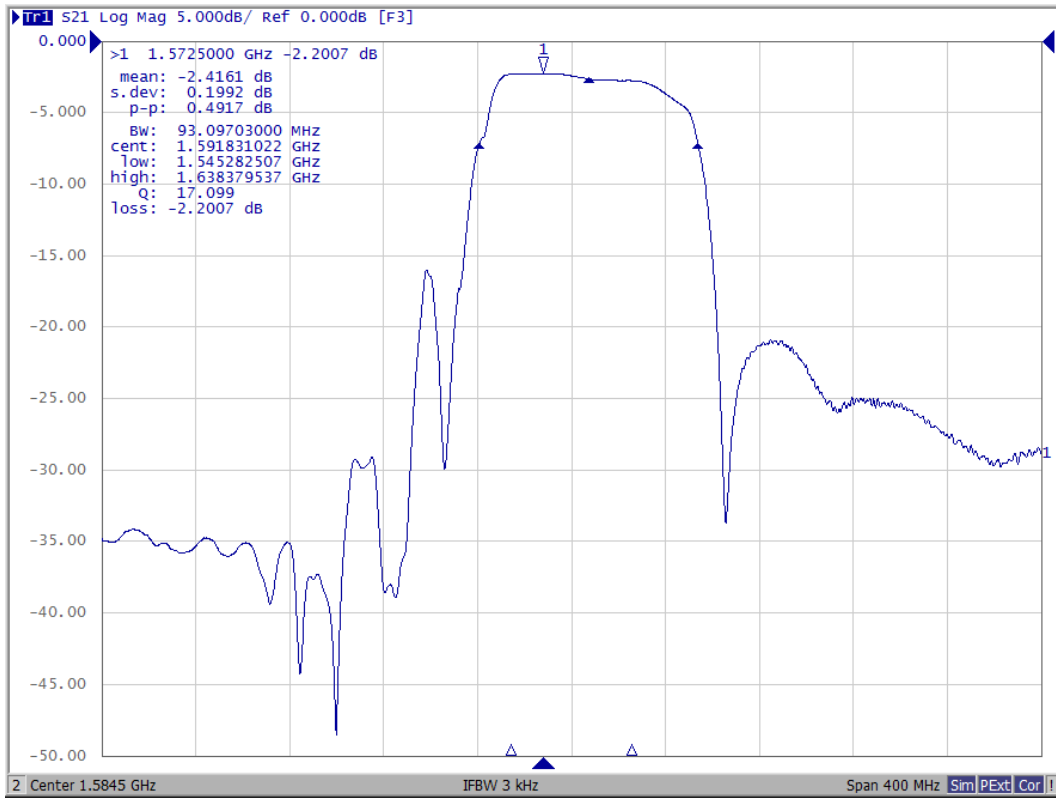


L1 Full Range

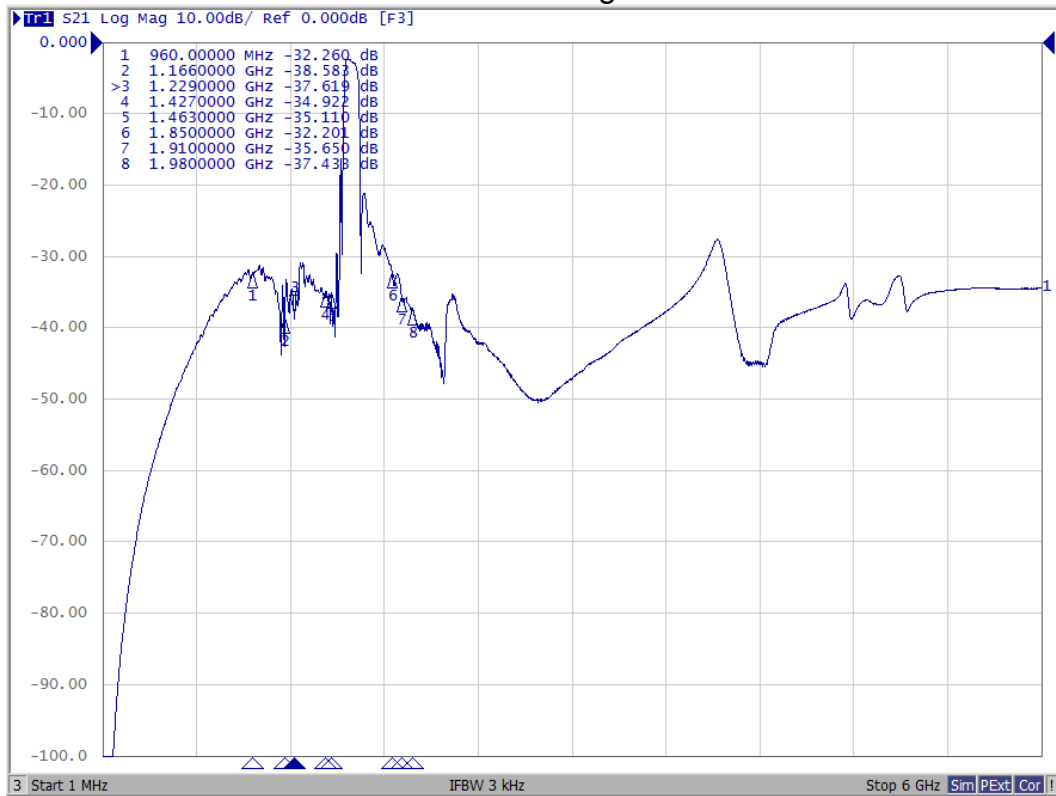


L1 Reflective Characteristic

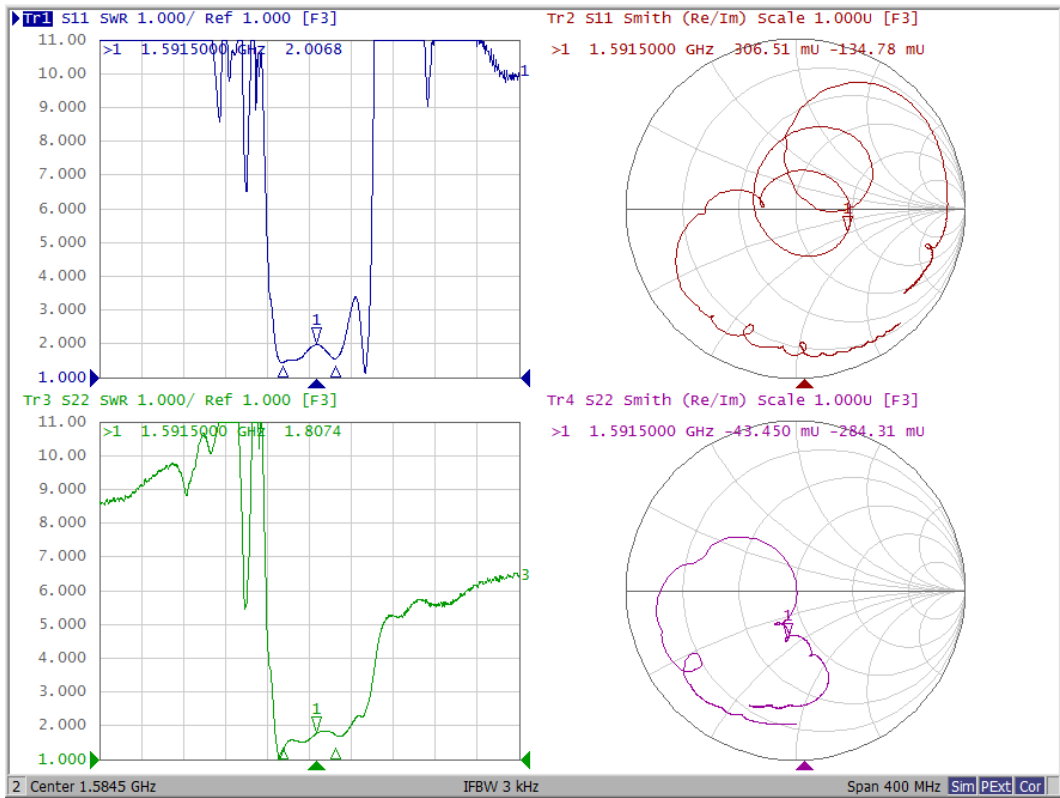

Isolation

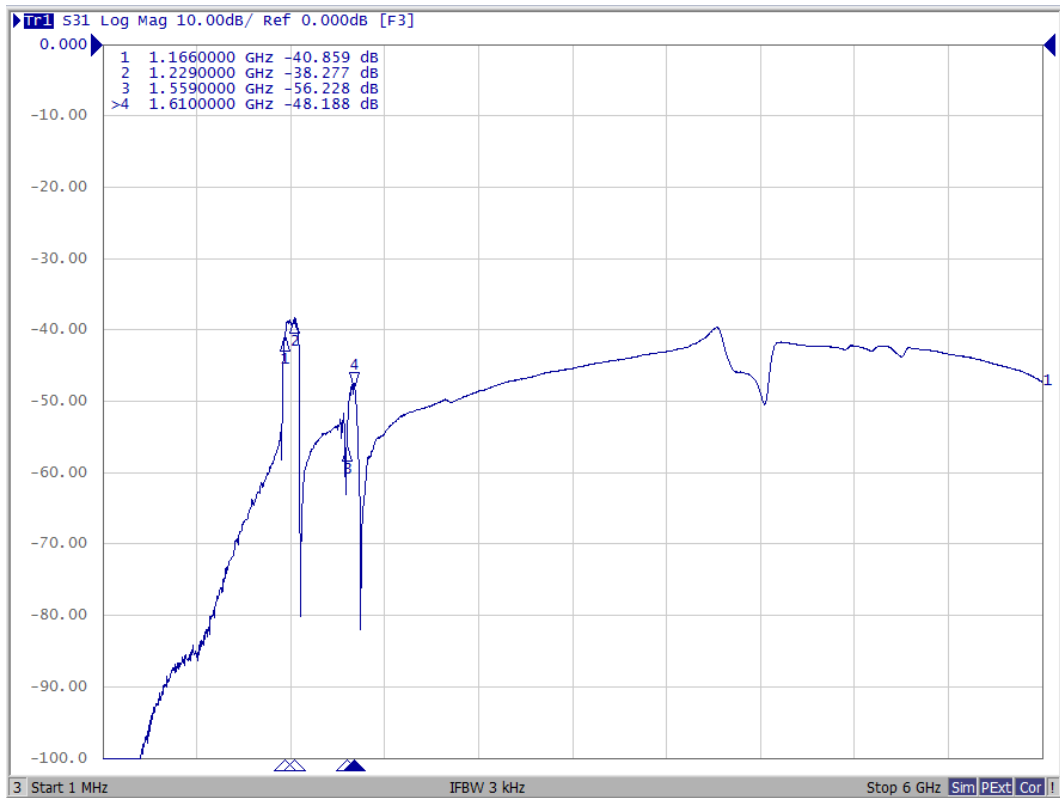


F. PCB FOOTPRINT:

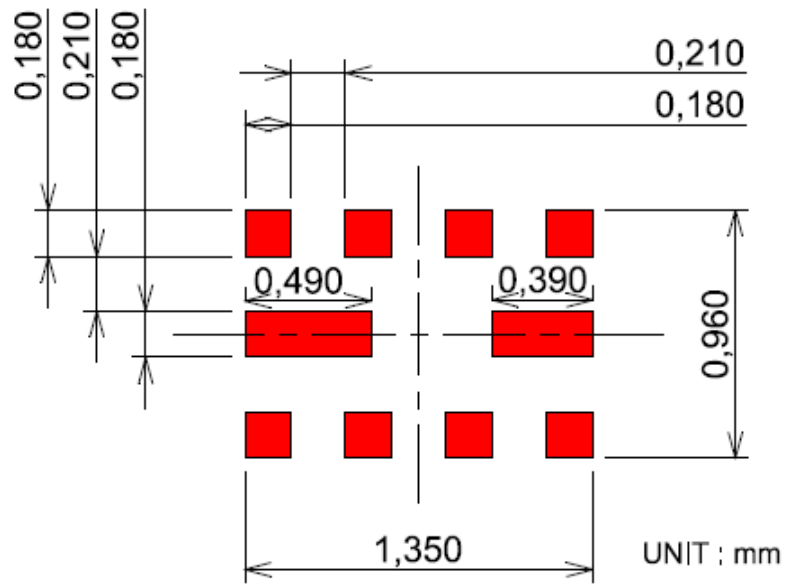


G. PACKING:

Reel Count: 7" = 3000

1. REEL DIMENSION

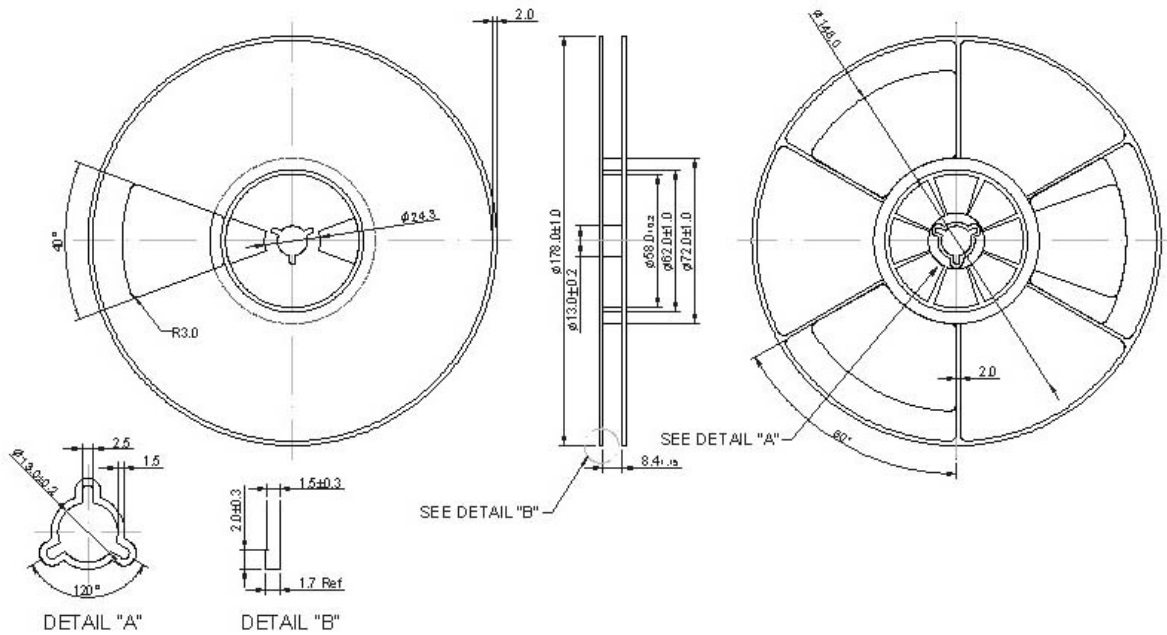

2. TAPE DIMENSION

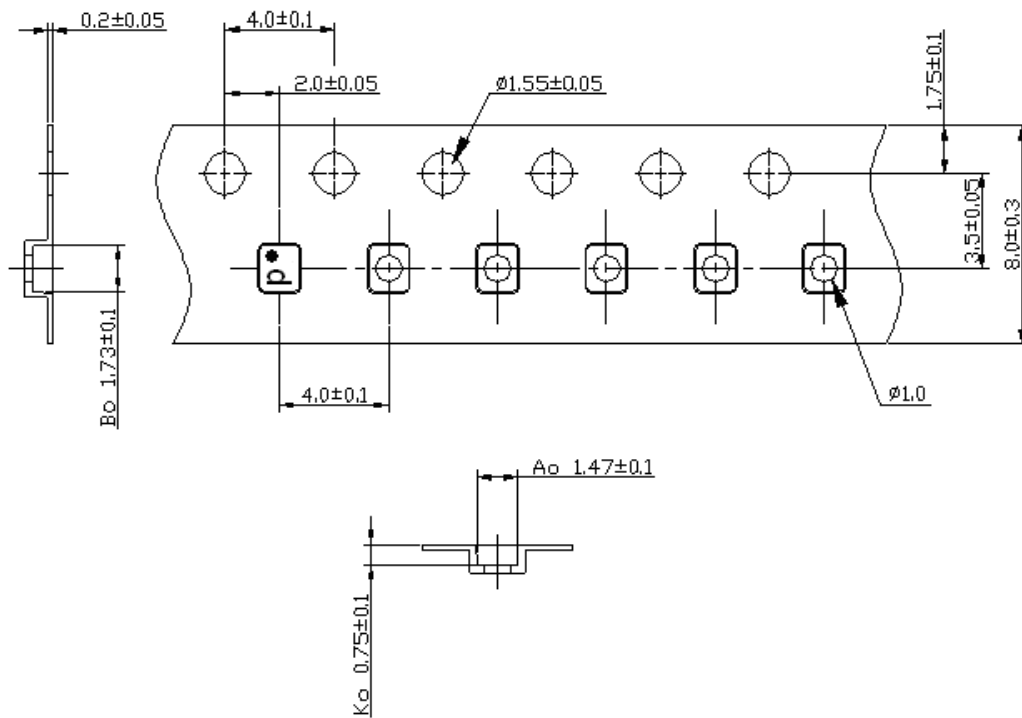

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C+0/-5°C peak (20~40sec).
4. Time: 2 times.

