


**-60V P+P-CHANNEL ENHANCEMENT MODE MOSFET**

**MAIN CHARACTERISTICS**

<b>I<sub>D</sub></b>	-8A
<b>V<sub>DSS</sub></b>	-60V
<b>R<sub>DS(on)-typ</sub>(@V<sub>GS</sub>=10V)</b>	< 80mΩ ( <b>Type:60 mΩ</b> )

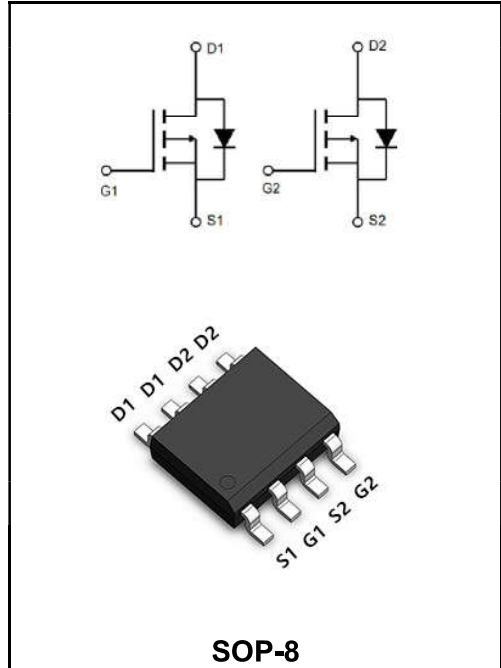

**Application**

- ◆ Brushless motor
- ◆ Load switch
- ◆ Uninterruptible power supply

**Product Specification Classification**

Part Number	Package	Marking	Pack
YFW8V06S	SOP-8	YFW 8V06S XXXXX	3000PCS/Tape

**Maximum Ratings at Tc=25°C unless otherwise specified**

Characteristics	Symbols	Value	Units
Drain-Source Voltage	V <sub>DS</sub>	-60	V
Gate - Source Voltage	V <sub>GS</sub>	±20	V
Continuous Drain Current, V <sub>GS</sub> @ -10V <sup>1</sup> @T <sub>A</sub> =25°C	I <sub>D</sub>	-8	A
Continuous Drain Current, V <sub>GS</sub> @ -10V <sup>1</sup> @T <sub>A</sub> =70°C	I <sub>D</sub>	-3	A
Pulsed Drain Current <sup>2</sup>	I <sub>DM</sub>	-30	A
Total Power Dissipation <sup>4</sup> @T <sub>A</sub> =25°C	P <sub>D</sub>	1.5	W
Storage Temperature Range	T <sub>STG</sub>	-55 to +150	°C
Operating Junction Temperature Range	T <sub>J</sub>	-55 to +150	°C
Thermal Resistance Junction-Ambient <sup>1</sup>	R <sub>θJA</sub>	70	°C/W
Thermal Resistance Junction to Case <sup>1</sup>	R <sub>θJC</sub>	36	°C/W

**Maximum Ratings at Tc=25°C unless otherwise specified**

Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu A$	$BV_{DSS}$	-60	-	-	V
BVDSS Temperature Coefficient	Reference to 25°C, $I_D=-1mA$	$\Delta BV_{DSS}/\Delta T_J$	-	-0.03	-	V/°C
Static Drain-Source On-Resistance	$V_{GS}=-10V, I_D=-12A$	$R_{DS(ON)}$	-	60	80	mΩ
	$V_{GS}=-4.5V, I_D=-8A$		-	64	105	
Gate -Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu A$	$V_{GS(th)}$	-1.2	1.5	-2.5	V
$V_{GS(th)}$ Temperature Coefficient		$\Delta V_{GS(th)}$	-	4.56	-	mV/°C
Drain-Source Leakage Current	$V_{DS}=-48V, V_{GS}=0V, T_J=25^\circ C$	$I_{DSS}$	-	-	1	μA
	$V_{DS}=-48V, V_{GS}=0V, T_J=55^\circ C$		-	-	5	
Gate -Source Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	$I_{GSS}$	-	-	±100	nA
Forward Transconductance	$V_{DS}=-5V, I_D=-12A$	$g_{fs}$	-	15.4	-	S
Gate Resistance	$V_{DS}=0V, V_{GS}=0V, f=1MHz$	$R_G$	-	13.5	-	Ω
Total Gate Charge(-4.5V)	$V_{DS}=-48V$ $V_{GS}=-4.5V$ $I_D=-10A$	$Q_g$	-	9.86	-	nC
Gate-Source Charge		$Q_{gs}$	-	3.08	-	
Gate-Drain Charge		$Q_{gd}$	-	2.95	-	
Turn-on delay time	$V_{DD}=-15V$ $V_{GS}=-10V$ $I_D=-1A$ $R_G=3.3$	$t_{d(on)}$	-	28.8	-	ns
Rise Time		$T_r$	-	19.8	-	
Turn-Off Delay Time		$t_{d(OFF)}$	-	60.8	-	
Fall Time		$t_f$	-	7.2	-	
Input Capacitance	$V_{DS}=-15V$ $V_{GS}=0V$ $f=1MHz$	$C_{iss}$	-	1447	-	pF
Output Capacitance		$C_{oss}$	-	97.3	-	
Reverse Transfer Capacitance		$C_{rss}$	-	70	-	
Continuous Source Current <sup>1,5</sup>	$V_G=V_D=0V, \text{Force Current}$	$I_S$	-	-	-18	A
Pulsed Source Current <sup>2,5</sup>		$I_{SM}$	-	-	-36	A
Diode Forward Voltage <sup>2</sup>	$V_{GS}=0V, I_S=-1A, T_J=25^\circ C$	$V_{SD}$	-	-	-1.2	V

Note :

- 1、 The data tested by surface mounted on a 1 inch<sup>2</sup> FR-4 board with 2OZ copper.
- 2、 The data tested by pulsed , pulse width  $\cong 300\mu s$  , duty cycle  $\cong 2\%$
- 3、 The power dissipation is limited by 150°C junction temperature
- 4、 The data is theoretically the same as ID and IDM , in real applications , should be limited by total power dissipation

Ratings and Characteristic Curves

Typical Characteristics

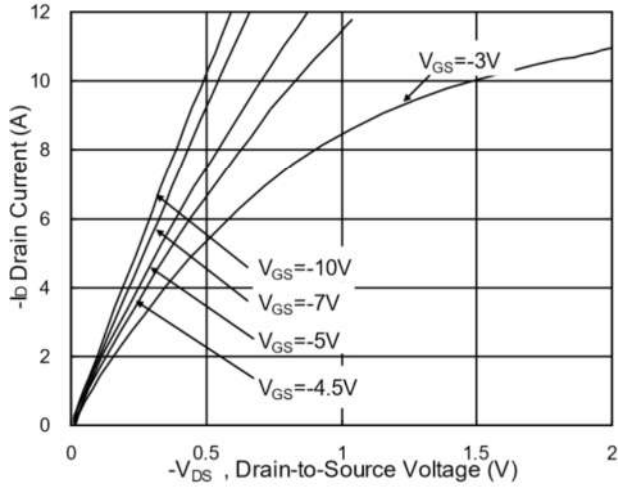


Fig.1 Typical Output Characteristics

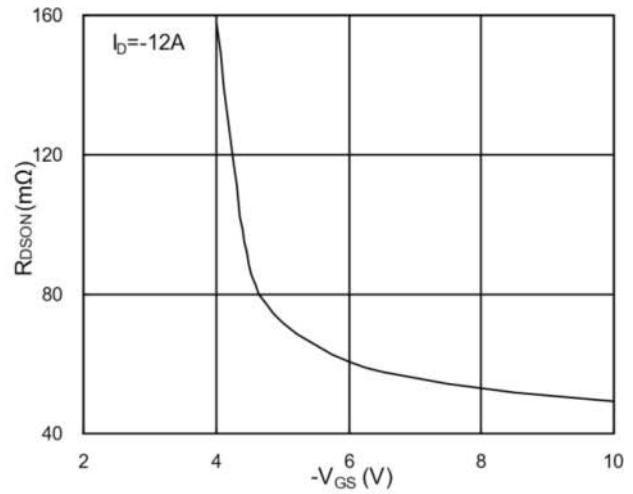


Fig.2 On-Resistance v.s Gate-Source

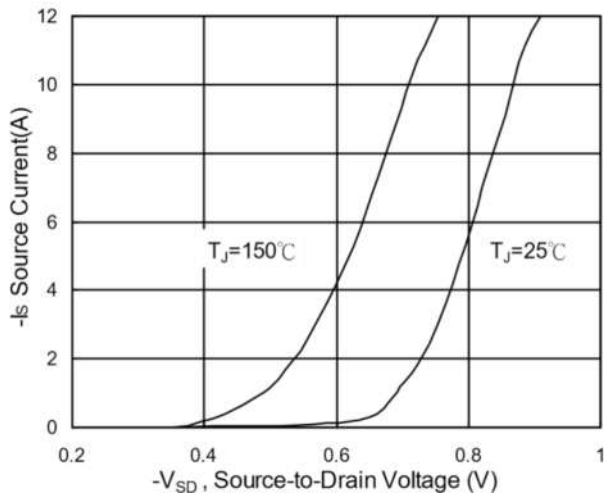


Fig.3 Forward Characteristics of Reverse

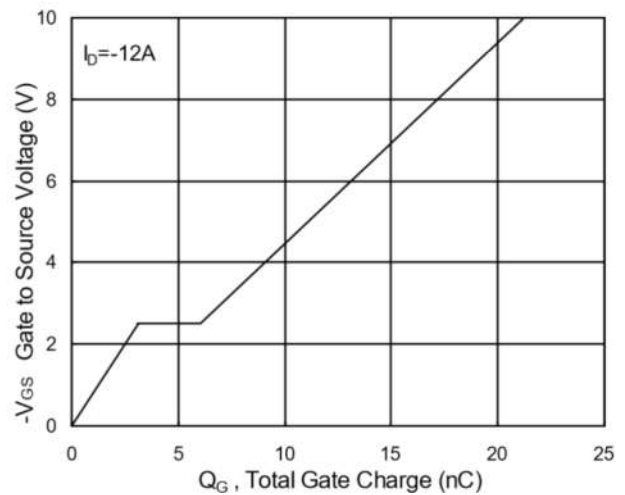


Fig.4 Gate-Charge Characteristics

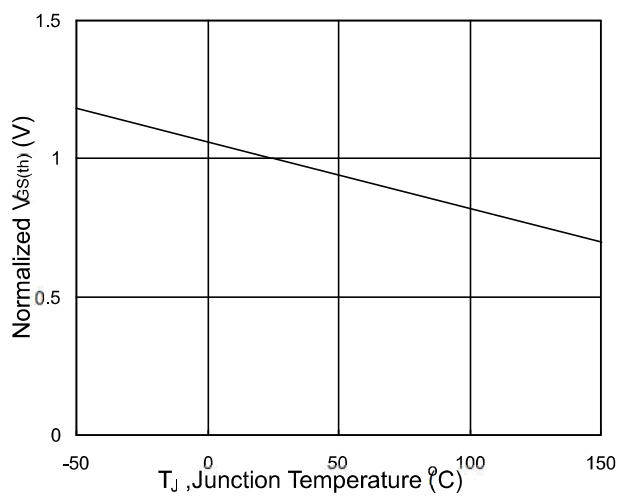


Fig.5 Normalized V<sub>GS(th)</sub> v.s T<sub>J</sub>



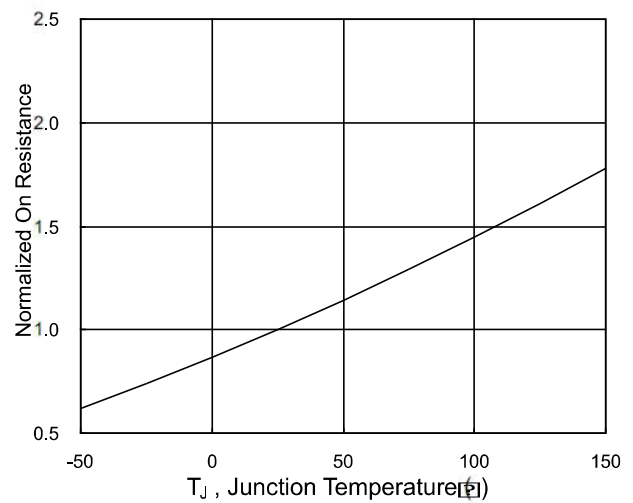


Fig.6 Normalized R<sub>DS(on)</sub> v.s T<sub>J</sub>


Ratings and Characteristic Curves

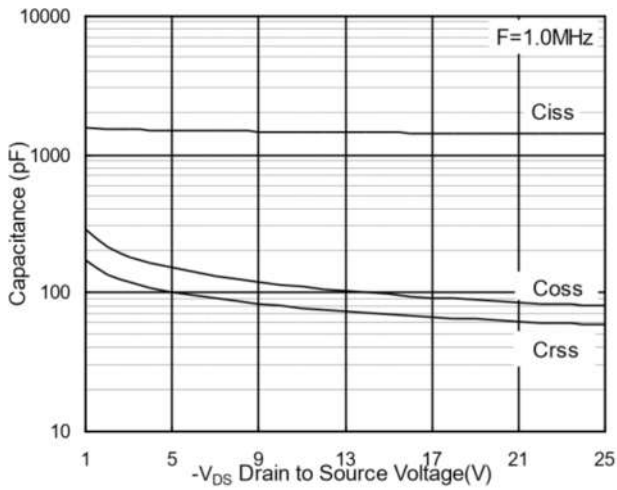


**Fig.7 Capacitance**

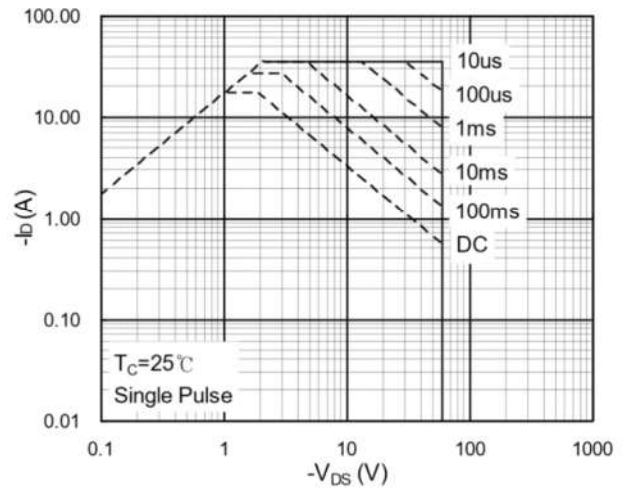


**Fig.8 Safe Operating Area**

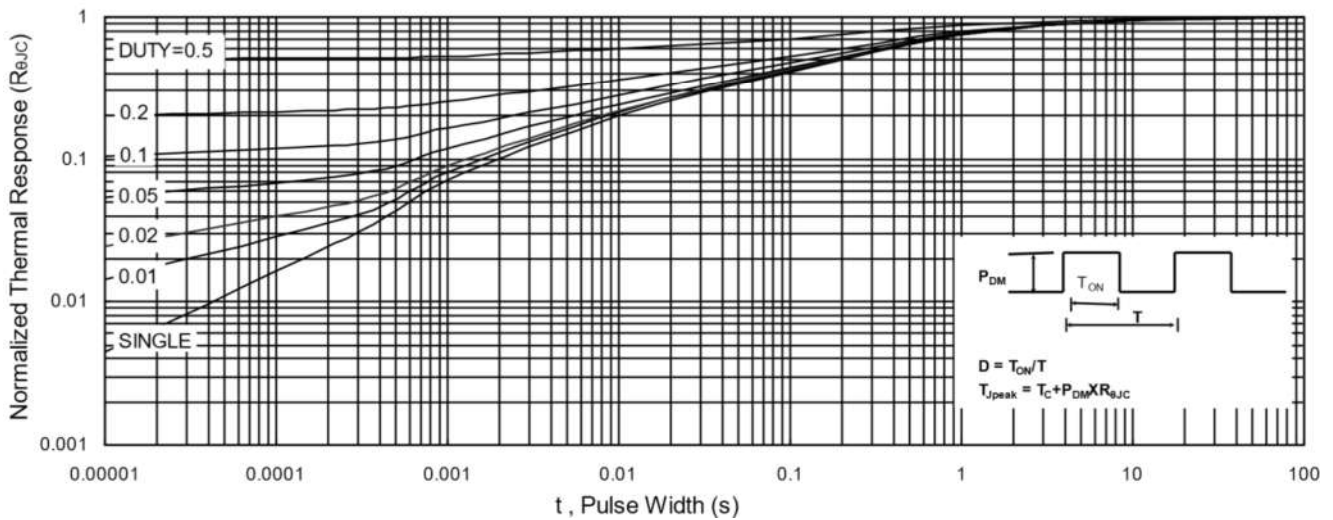

**Fig.9 Normalized Maximum Transient Thermal Impedance**

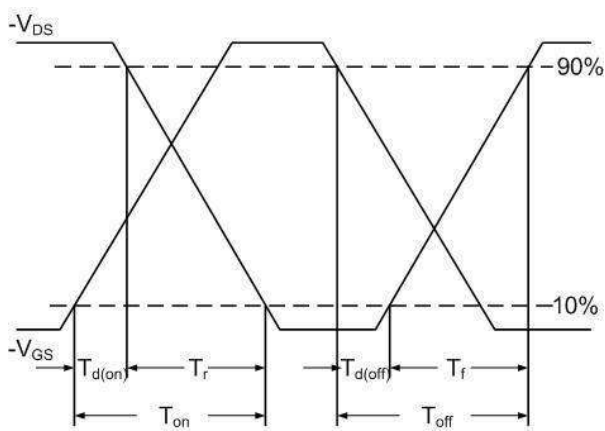


**Fig.10 Switching Time Waveform**

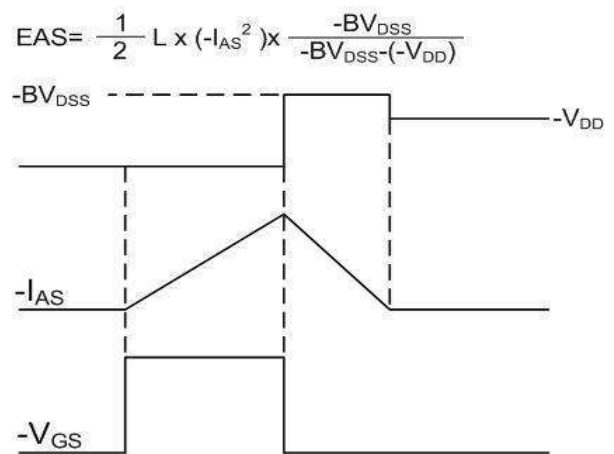


**Fig.11 Unclamped Inductive Waveform**

SOP-8

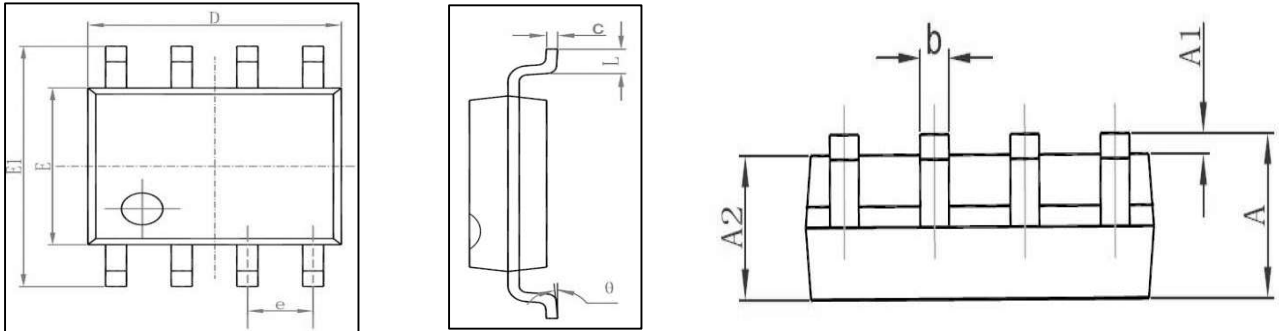

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270 (BSC)		0.050 (BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

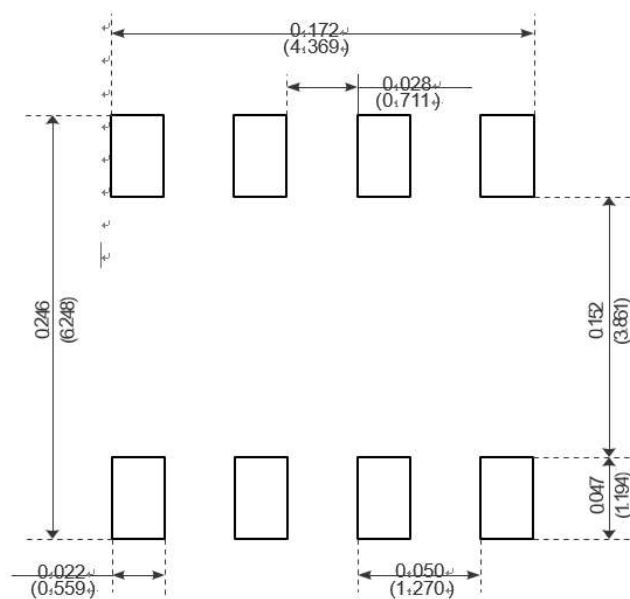

Recommended Minimum Pads