


-20V P-CHANNEL ENHANCEMENT MODE MOSFET

MAIN CHARACTERISTICS

I_D	-7A
V_{DSS}	-20V
R_{DS(on)-typ(@V_{GS}=-4.5V)}	< 21mΩ(Type:16 mΩ)

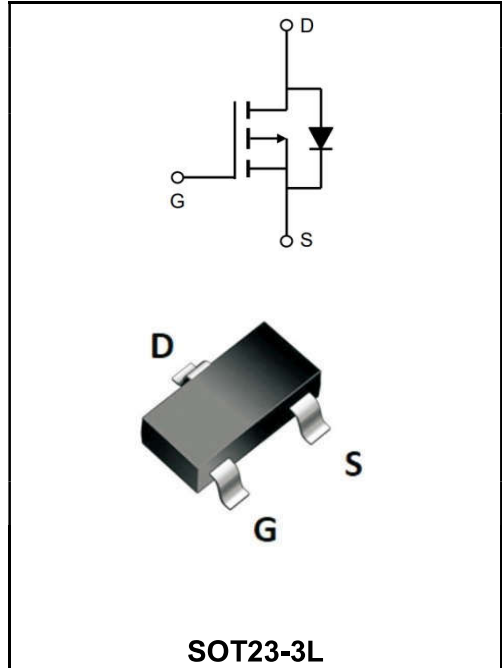

Application

- ◆ Battery protection
- ◆ Load switch
- ◆ Uninterruptible power supply

Product Specification Classification

Part Number	Package	Marking	Pack
YFW2307MI	SOT23-3L	2307	3000PCS/Tape

Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Symbols	Value	Units
Drain-Source Voltage	V_{DS}	-20	V
Gate - Source Voltage	V_{GS}	± 12	V
Continuous Drain Current, V _{GS} @ -4.5V ¹ @T _A =25°C	I_D	-7.1	A
Continuous Drain Current, V _{GS} @ -4.5V ¹ @T _A =70°C	I_D	-4.8	A
Pulsed Drain Current ²	I_{DM}	-23.8	A
Total Power Dissipation ³ @T _A =25°C	P_D	1	W
Storage Temperature Range	T_{STG}	-55 to +150	°C
Operating Junction Temperature Range	T_J	-55 to +150	°C
Thermal Resistance Junction-Ambient ¹	R_{θJA}	125	°C/W
Thermal Resistance Junction to Case ¹	R_{θJC}	80	°C/W

Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu A$	BV_{DSS}	-20	-22	-	V
BVDSS Temperature Coefficient	Reference to 25°C, $I_D=-1mA$	$\Delta BV_{DSS}/\Delta T_J$	-	-0.01	-	V/°C
Static Drain-Source On-Resistance ²	$V_{GS}=-4.5V, I_D=-4A$	$R_{DS(ON)}$	-	16	21	mΩ
	$V_{GS}=-2.5V, I_D=-3A$		-	20	28	
	$V_{GS}=-1.8V, I_D=-1.5A$		-	28	35	
Gate -Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu A$	$V_{GS(th)}$	-0.4	-0.7	-1.0	V
$V_{GS(th)}$ Temperature Coefficient		$\Delta V_{GS(th)}$	-	2.96	-	mV/°C
Drain-Source Leakage Current	$V_{DS}=-16V, V_{GS}=0V, T_J=25^\circ C$	I_{DSS}	-	-	-1	μA
	$V_{DS}=-16V, V_{GS}=0V, T_J=55^\circ C$		-	-	-5	
Gate -Source Leakage Current	$V_{GS}=\pm 12V, V_{DS}=0V$	I_{GSS}	-	-	±100	nA
Forward Transconductance	$V_{DS}=-5V, I_D=-4A$	g_{fs}	-	21	-	S
Total Gate Charge(-4.5V)	$V_{DS}=-15V$ $V_{GS}=-4.5V$ $I_D=-4A$	Q_g	-	27.3	38.2	nC
Gate-Source Charge		Q_{gs}	-	3.6	5.0	
Gate-Drain Charge		Q_{gd}	-	6.5	9.1	
Turn-on delay time	$V_{DD}=-10V$ $V_{GS}=-4.5V$ $I_D=-4A$ $R_G=3.3\Omega$	$t_{d(on)}$	-	9.2	18.4	ns
Rise Time		T_r	-	59	106	
Turn-Off Delay Time		$t_{d(OFF)}$	-	99	198	
Fall Time		t_f	-	71	142	
Input Capacitance	$V_{DS}=-15V$ $V_{GS}=0V$ $f=1MHz$	C_{iss}	-	2280	3192	pF
Output Capacitance		C_{oss}	-	220	308	
Reverse Transfer Capacitance		C_{rss}	-	187	262	
Continuous Source Current ^{1,4}	$V_G=V_D=0V, \text{Force Current}$	I_S	-	-	-4.7	A
Pulsed Source Current ^{2,4}		I_{SM}	-	-	-18.8	A
Diode Forward Voltage ²	$V_{GS}=0V, I_S=-1A, T_J=25^\circ C$	V_{SD}	-	-	-1	V
Reverse Recovery Time	$I_F=-4A, dI/dt=100A/\mu s, T_J=25^\circ C$	t_{rr}	-	52	-	ns
Reverse Recovery Charge		Q_{rr}	-	28	-	nC

Note :

1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.

2.The data tested by pulsed , pulse width $\cong 300\mu s$, duty cycle $\cong 2\%$

3.The power dissipation is limited by 150°C junction temperature

4 .The data is theoretically the same as ID and IDM , in real applications , should be limited by total power dissipation.

Ratings and Characteristic Curves

Typical Characteristics

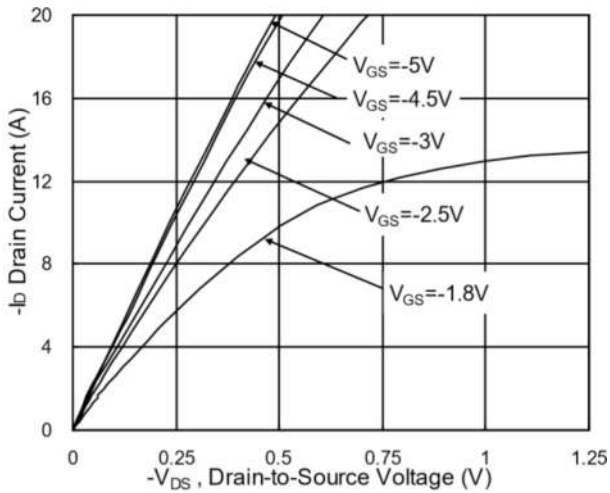


Fig.1 Typical Output Characteristics

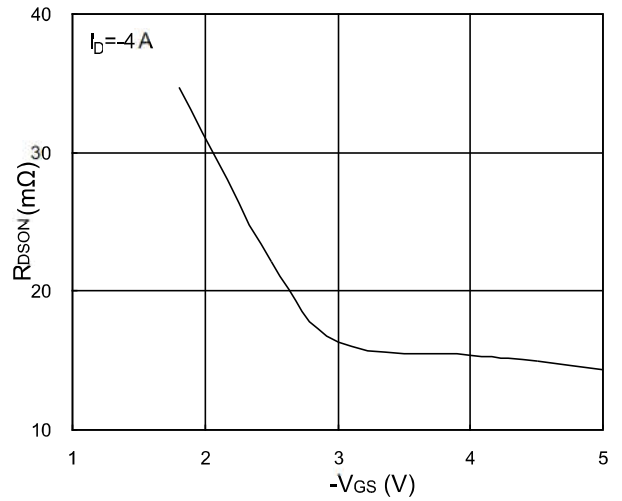


Fig.2 On-Resistance vs. Gate-Source

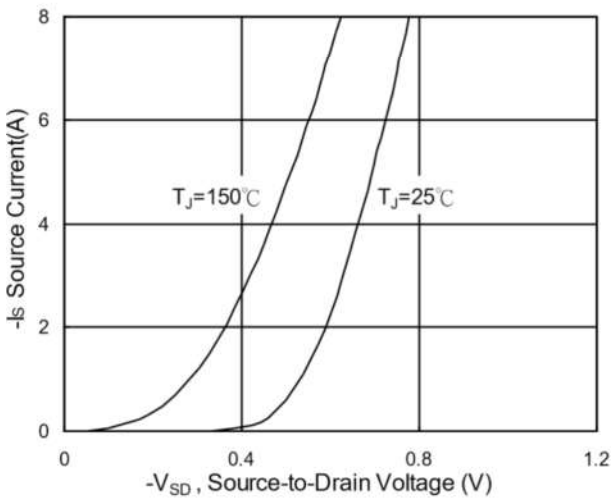


Fig.3 Forward Characteristics Of Reverse

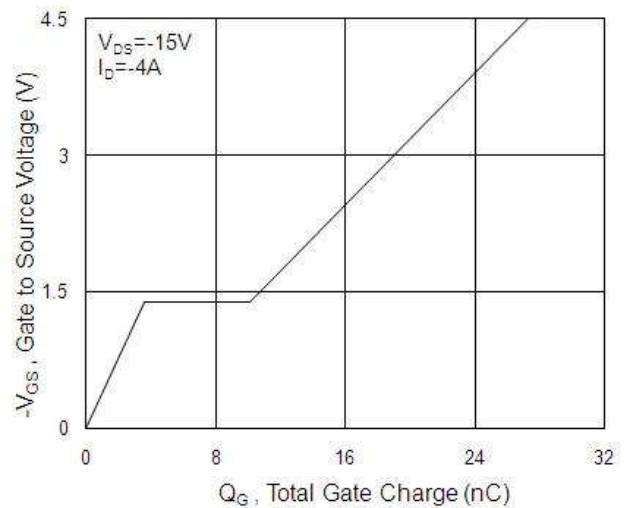


Fig.4 Gate-Charge Characteristics

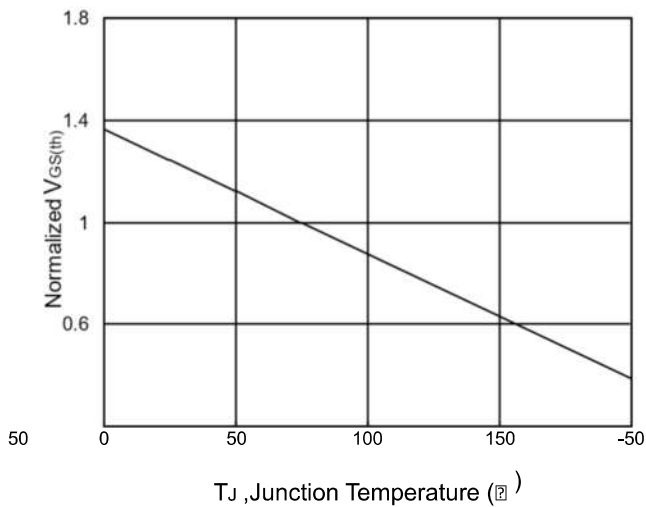


Fig.5 Normalized $V_{GS(th)}$ vs. T_J

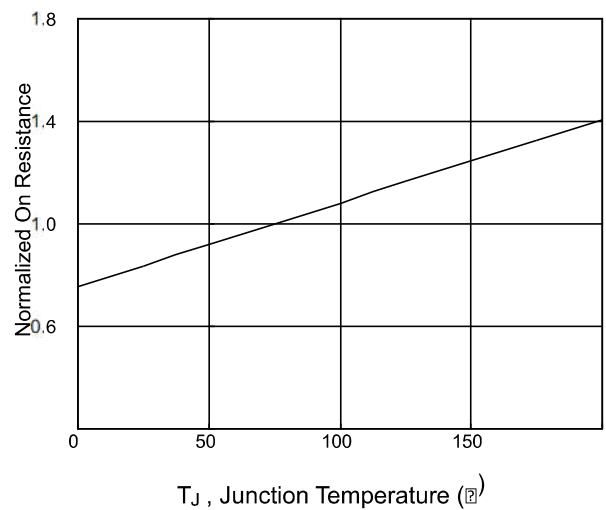


Fig.6 Normalized $R_{DS(on)}$ vs. T_J

Ratings and Characteristic Curves

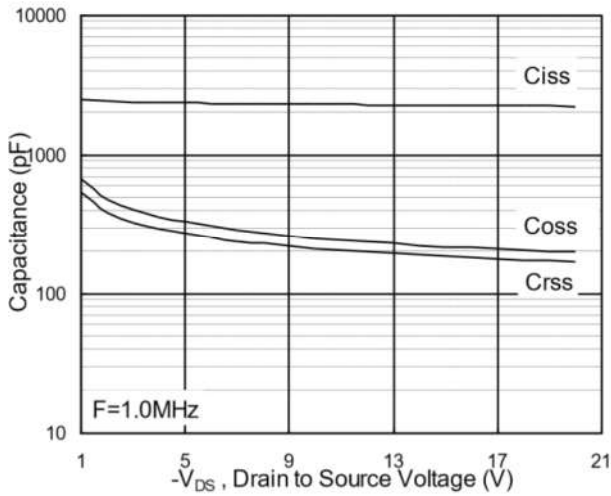


Fig.7 Capacitance

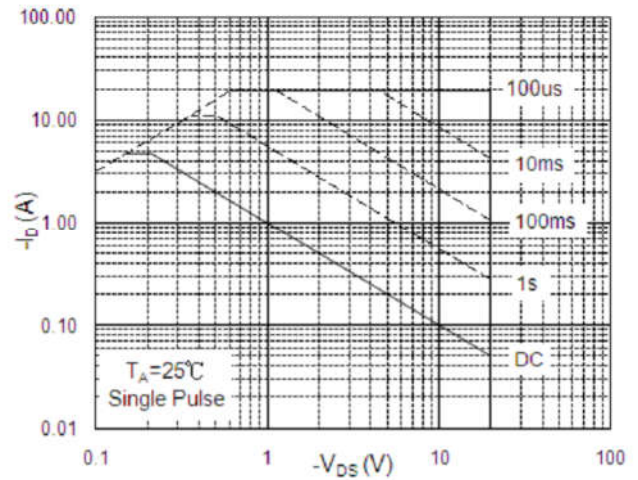


Fig.8 Safe Operating Area

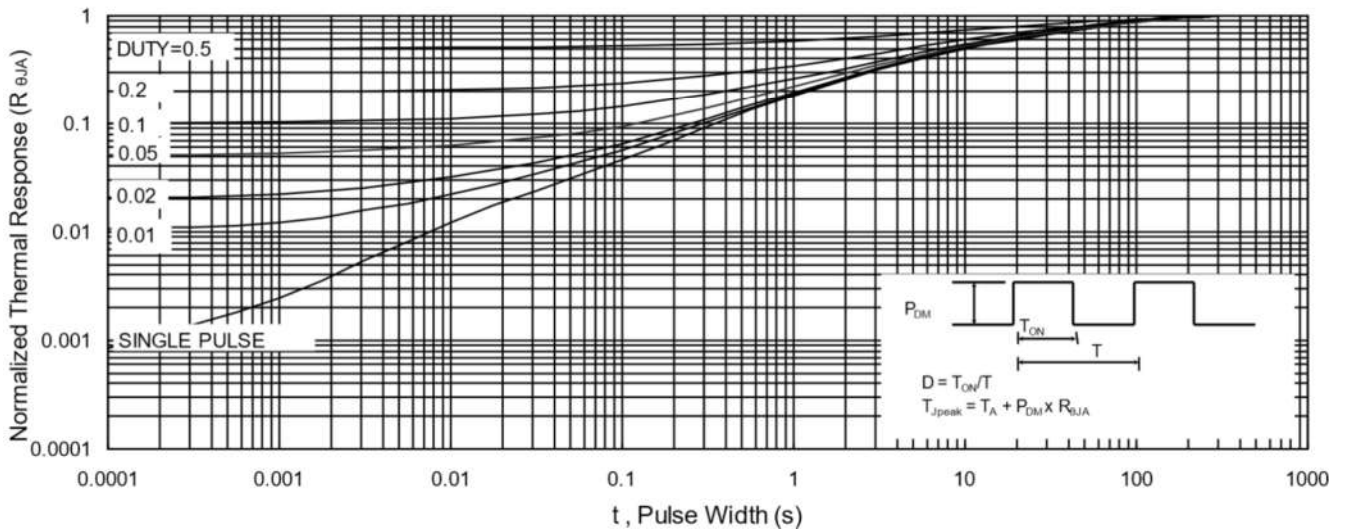


Fig.9 Normalized Maximum Transient Thermal Impedance

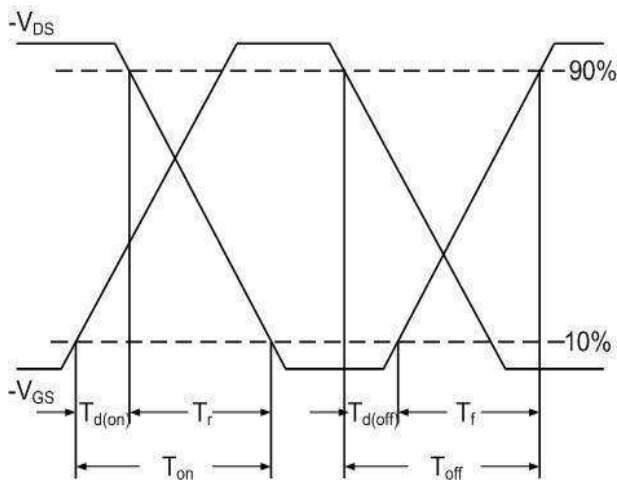


Fig.10 Switching Time Waveform


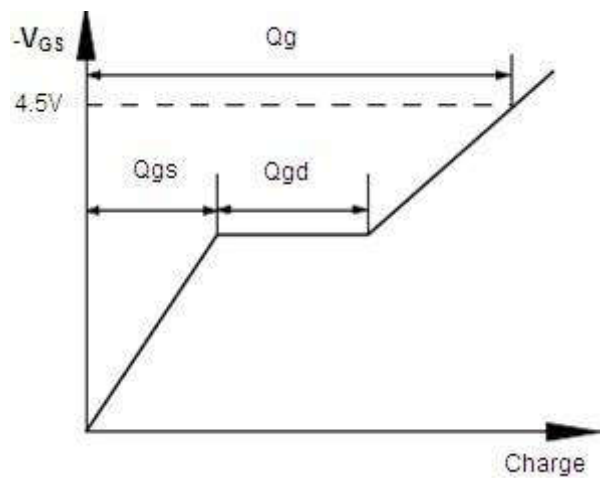


Fig.11 Gate Charge Waveform

SOT23-3L

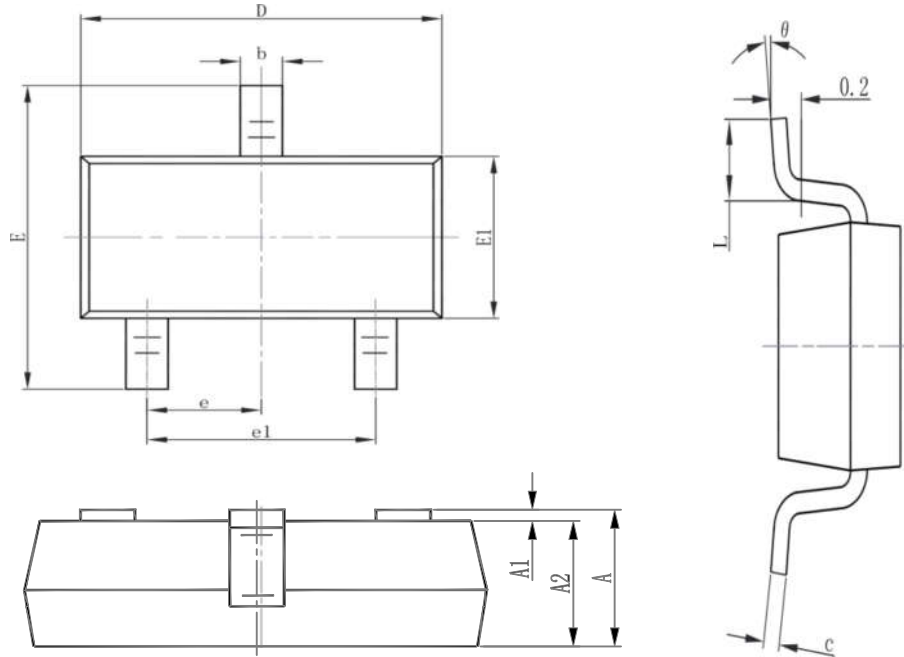

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°