


**40V N-CHANNEL ENHANCEMENT MODE MOSFET**

**MAIN CHARACTERISTICS**

<b>I<sub>D</sub></b>	110A
<b>V<sub>DSS</sub></b>	40V
<b>R<sub>DS(on)-typ</sub>(@V<sub>GS</sub>=10V)</b>	< 4.3mΩ ( <b>Type:3.5 mΩ</b> )

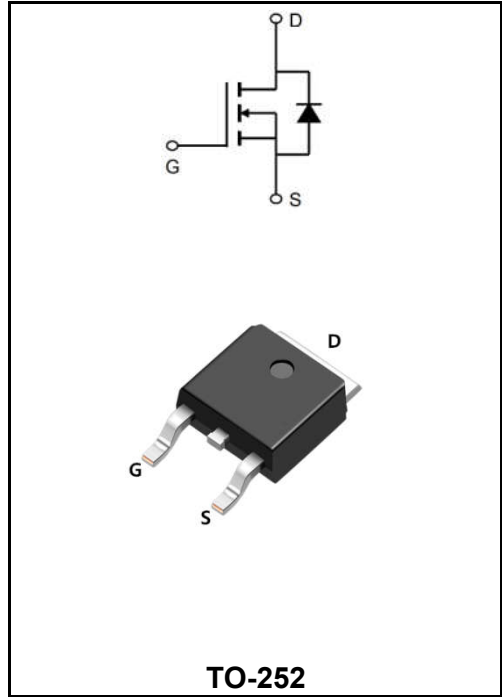

**Application**

- ◆ Battery protection
- ◆ Load switch
- ◆ Uninterruptible power supply

**Product Specification Classification**

Part Number	Package	Marking	Pack
YFW110N04AD	TO-252	YFW 110N04AD XXXXX	2500PCS/Tape

**Maximum Ratings at T<sub>c</sub>=25°C unless otherwise specified**

Characteristics	Symbols	Value	Units
Drain-Source Voltage	<b>V<sub>DS</sub></b>	40	<b>V</b>
Gate - Source Voltage	<b>V<sub>GS</sub></b>	±20	<b>V</b>
Continuous Drain Current, V <sub>GS</sub> @ 10V <sup>1</sup> @T <sub>c</sub> =25°C	<b>I<sub>D</sub></b>	110	<b>A</b>
Continuous Drain Current, V <sub>GS</sub> @ 10V <sup>1</sup> @T <sub>c</sub> =100°C	<b>I<sub>D</sub></b>	78	<b>A</b>
Pulsed Drain Current <sup>2</sup>	<b>I<sub>DM</sub></b>	440	<b>A</b>
Single Pulse Avalanche Energy <sup>3</sup>	<b>E<sub>AS</sub></b>	195	<b>mJ</b>
Avalanche Current	<b>I<sub>AS</sub></b>	42	<b>A</b>
Total Power Dissipation <sup>4</sup> @T <sub>c</sub> =25°C	<b>P<sub>D</sub></b>	108	<b>W</b>
Storage Temperature Range	<b>T<sub>STG</sub></b>	-55 to +150	<b>°C</b>
Operating Junction Temperature Range	<b>T<sub>J</sub></b>	-55 to +150	<b>°C</b>
Thermal Resistance Junction-Ambient <sup>1</sup>	<b>R<sub>θJA</sub></b>	62	<b>°C/W</b>
Thermal Resistance Junction-Case <sup>1</sup>	<b>R<sub>θJC</sub></b>	1.4	<b>°C/W</b>

**Maximum Ratings at Tc=25°C unless otherwise specified**


Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	$BV_{DSS}$	40	44	-	V
BVDSS Temperature Coefficient	Reference to 25°C, $I_D=1mA$	$\Delta BV_{DSS}/\Delta T_J$	-	0.052	-	V/°C
Static Drain-Source On-Resistance <sup>2</sup>	$V_{GS}=10V, I_D=30A$	$R_{DS(ON)}$	-	3.5	4.3	mΩ
	$V_{GS}=4.5V, I_D=20A$		-	5.4	7.5	
Gate -Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	$V_{GS(th)}$	1.2	1.6	2.5	V
$V_{GS(th)}$ Temperature Coefficient		$\Delta V_{GS(th)}$	-	-5.76	-	mV/°C
Drain -Source Leakage Current	$V_{DS}=40V, V_{GS}=0V, T_J=25^\circ C$	$I_{DSS}$	-	-	1	μA
	$V_{DS}=40V, V_{GS}=0V, T_J=55^\circ C$		-	-	5	
Gate-Source Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	$I_{GSS}$	-	-	±100	nA
Forward Transconductance	$V_{DS}=5V, I_D=30A$	$g_{FS}$	-	42	-	S
Total Gate Charge(4.5V)	$V_{DS}=48V$ $V_{GS}=10V$ $I_D=30A$	$Q_g$	-	65	-	nC
Gate-Source Charge		$Q_{gs}$	-	12.5	-	
Gate-Drain Charge		$Q_{gd}$	-	15	-	
Turn-on delay time	$V_{DD}=30V$ $V_{GS}=10V$ $R_G=4.7\Omega$ $I_D=15A$	$t_{d(on)}$	-	12	-	ns
Rise Time		$T_r$	-	16	-	
Turn-Off Delay Time		$t_{d(OFF)}$	-	39	-	
Fall Time		$t_f$	-	15	-	
Input Capacitance	$V_{DS}=30V$ $V_{GS}=0V$ $f=1.0MHz$	$C_{iss}$	-	5595	-	pF
Output Capacitance		$C_{oss}$	-	411	-	
Reverse Transfer Capacitance		$C_{rss}$	-	340	-	
Continuous Source Current <sup>1,5</sup>	$V_G=V_D=0V, \text{ Force Current}$	$I_S$	-	-	110	A
Pulsed Source Current <sup>2,5</sup>		$I_{SM}$	-	-	440	A
Diode Forward Voltage <sup>2</sup>	$V_{GS}=0V, I_S=30A, T_J=25^\circ C$	$V_{SD}$	-	-	1.2	V
Reverse Recovery Time	$I_F=30A, di/dt=100A/\mu s, T_J=25^\circ C$	$t_{rr}$	-	22	-	ns
Reverse Recovery Charge		$Q_{rr}$	-	11	-	nC

Note :


- 1、 The data tested by surface mounted on a 1 inch 2 FR-4 board with 2OZ copper.
- 2、 The data tested by pulsed , pulse width  $\leq 300\mu s$  , duty cycle  $\leq 2\%$
- 3、 The EAS data shows Max. rating .  $T_J=25^\circ C, V_{DD}=32V, V_G=10V, R_G=25\Omega, L=0.1mH, I_{AS}=42A$
- 4、 The power dissipation is limited by 150°C junction temperature
- 5、 The data is theoretically the same as I D and I DM , in real applications , should be limited by total power dissipation.

**Ratings and Characteristic Curves**


**Typical Characteristics**

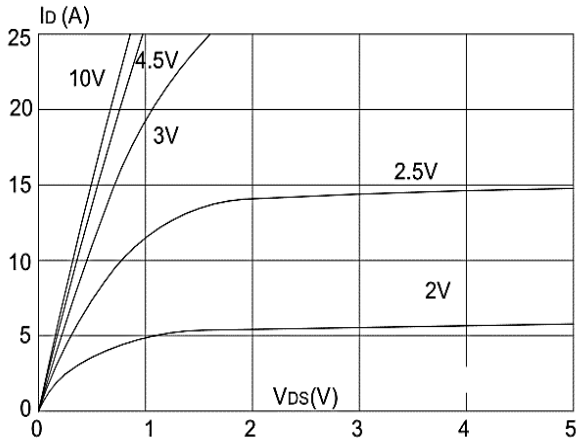


**Figure 1: Output Characteristics**

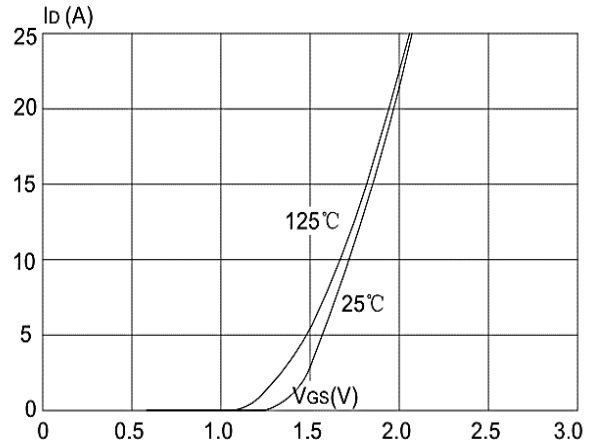


**Figure 2: Typical Transfer Characteristics**

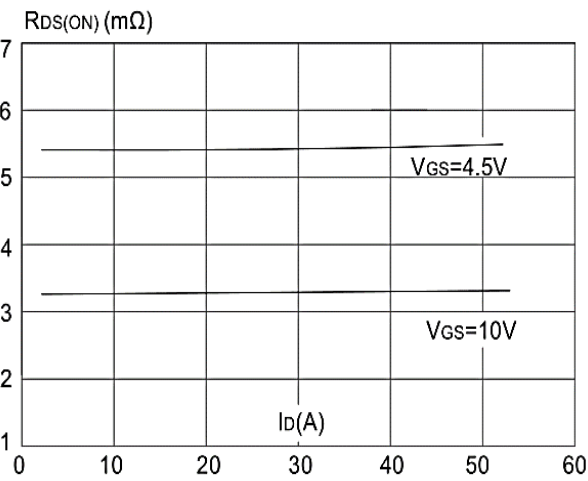


**Figure 3: On-resistance vs. Drain Current**

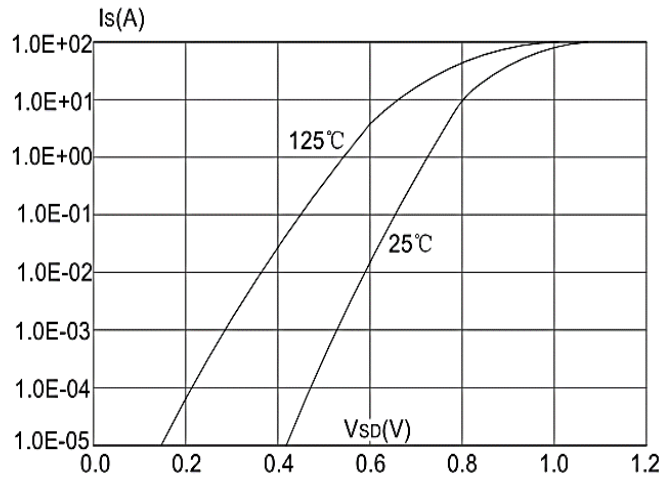

**Figure 4: Body Diode Characteristics**

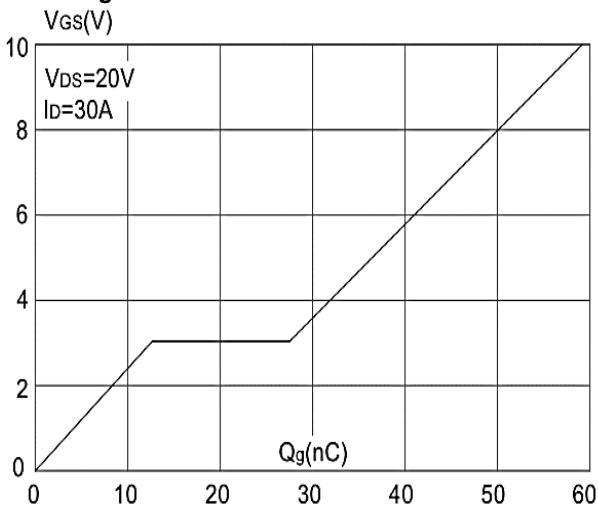


**Figure 5: Gate Charge Characteristics**

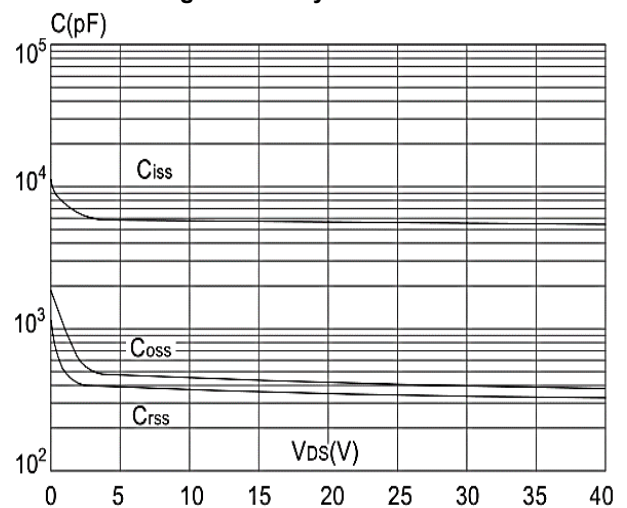


**Figure 6: Capacitance Characteristics**


**Ratings and Characteristic Curves**

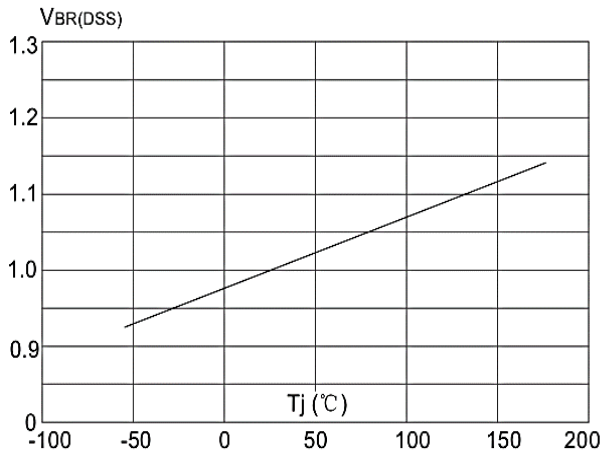


**Figure 7: Normalized Breakdown Voltage vs Junction Temperature**

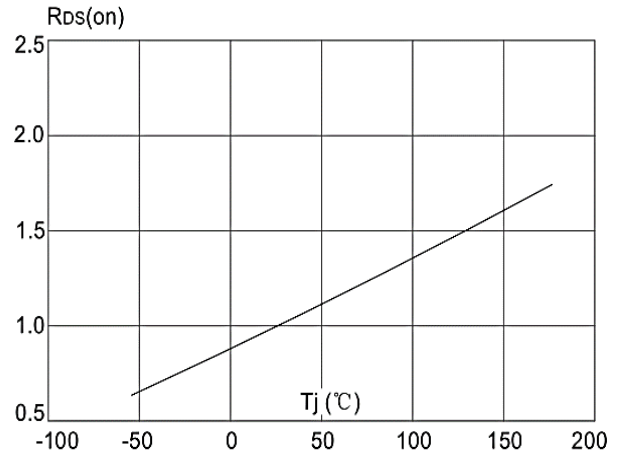


**Figure 8: Normalized on Resistance vs. Junction Temperature**

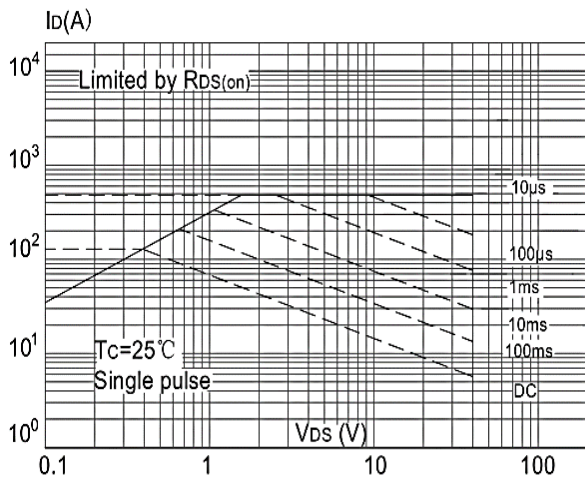

**Figure 9: Maximum Safe Operating Area**

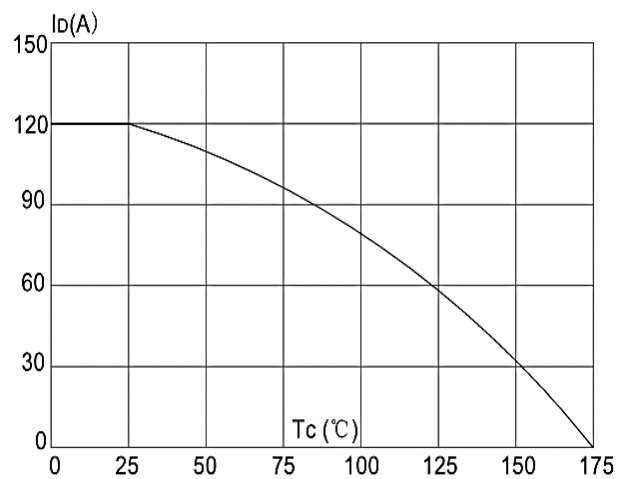

**Figure 10: Maximum Continuous Drain Current vs. Ambient Temperature**

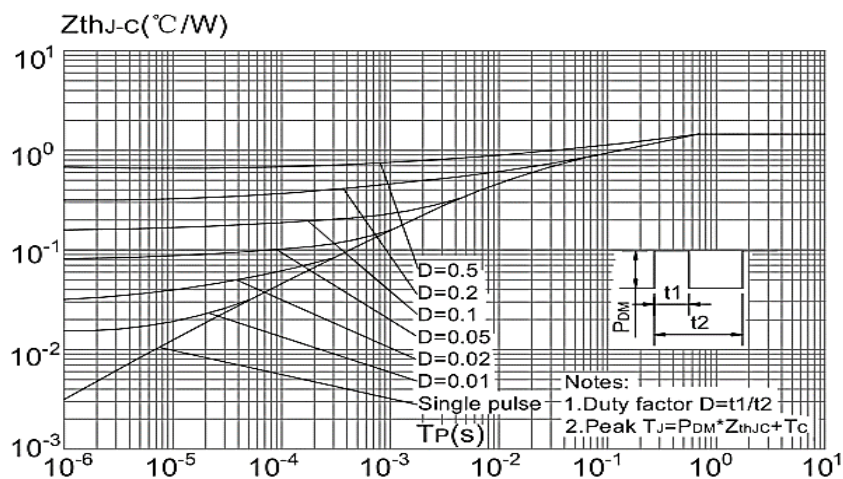

**Figure.11: Maximum Effective Transient Thermal Impedance, Junction-to-Ambien**

Package Outline Dimensions Millimeters

TO-252

Dim.	Min.	Typ.	Max.
A	2.10	-	2.50
A2	0	-	0.10
B	0.66	-	0.86
B2	5.18	-	5.48
C	0.40	-	0.60
C2	0.44	-	0.58
D	5.90	-	6.30
D1	5.30REF		
E	6.40	-	6.80
E1	4.63	-	-
G	4.47	-	4.67
H	9.50	-	10.70
L	1.09	-	1.21
L2	1.35	-	1.65
V1	-	7°	-
V2	0°	-	6°
All Dimensions in millimeter			

