


60V N-CHANNEL ENHANCEMENT MODE MOSFET

MAIN CHARACTERISTICS

I_D	3A
V_{DSS}	60V
$R_{DS(on)-typ}(@V_{GS}=10V)$	< 100mΩ (Type:80 mΩ)

Application

- ◆ Battery protection
- ◆ Load switch
- ◆ Uninterruptible power supply

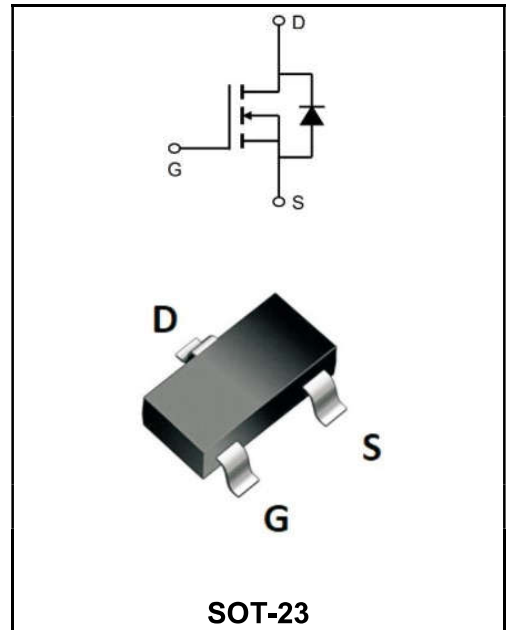

Product Specification Classification

Part Number	Package	Marking	Pack
YFW3N06	SOT-23	6003	3000PCS/Tape

Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Symbols	Value	Units
Drain-Source Voltage	V_{DS}	60	V
Gate - Source Voltage	V_{GS}	±20	V
Continuous Drain Current, $V_{GS} @ 10V^1 @ T_C=25^\circ C$	I_D	3.0	A
Continuous Drain Current, $V_{GS} @ 10V^1 @ T_A=70^\circ C$	I_D	1.8	A
Pulsed Drain Current ²	I_{DM}	9.2	A
Total Power Dissipation ⁴ @ $T_A=25^\circ C$	P_D	1	W
Storage Temperature Range	T_{STG}	-55 to +150	°C
Operating Junction Temperature Range	T_J	-55 to +150	°C
Thermal Resistance Junction-Ambient ¹	$R_{\theta JA}$	125	°C/W
Thermal Resistance Junction-Case ¹	$R_{\theta JC}$	80	°C/W

Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	BV_{DSS}	60	-	-	V
BVDSS Temperature Coefficient	Reference to 25°C, $I_D=1mA$	$\Delta BV_{DSS}/\Delta T_J$	-	0.054	-	V/°C
Static Drain-Source On-Resistance ²	$V_{GS}=10V, I_D=2A$	$R_{DS(ON)}$	-	80	100	mΩ
	$V_{GS}=4.5V, I_D=1A$		-	85	110	
Gate -Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	$V_{GS(th)}$	1.2	-	2.5	V
$V_{GS(th)}$ Temperature Coefficient		$\Delta V_{GS(th)}$	-	-4.96	-	mV/°C
Drain -Source Leakage Current	$V_{DS}=48V, V_{GS}=0V, T_J=25^\circ C$	I_{DSS}	-	-	1	μA
	$V_{DS}=48V, V_{GS}=0V, T_J=55^\circ C$		-	-	5	
Gate-Source Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	I_{GSS}	-	-	±100	nA
Forward Transconductance	$V_{DS}=5V, I_D=2A$	g_{FS}	-	13	-	S
Total Gate Charge(4.5V)	$V_{DS}=48V$ $V_{GS}=4.5V$ $I_D=2A$	Q_g	-	5	7.0	nC
Gate-Source Charge		Q_{gs}	-	1.68	2.4	
Gate-Drain Charge		Q_{gd}	-	1.9	2.7	
Turn-on delay time	$V_{DD}=30V$ $V_{GS}=10V$ $R_G=3.3$ $I_D=2A$	$t_{d(on)}$	-	1.6	3.2	ns
Rise Time		T_r	-	7.2	13	
Turn-Off Delay Time		$t_{d(OFF)}$	-	25	50	
Fall Time		t_f	-	14.4	28.8	
Input Capacitance	$V_{DS}=15V$ $V_{GS}=0V$ $f=1.0MHz$	C_{iss}	-	511	715	pF
Output Capacitance		C_{oss}	-	38	53	
Reverse Transfer Capacitance		C_{rss}	-	25	35	
Continuous Source Current ^{1,4}	$V_G=V_D=0V$, Force Current	I_S	-	-	2.3	A
Pulsed Source Current ^{2,4}		I_{SM}	-	-	9.2	A
Diode Forward Voltage ²	$V_{GS}=0V, I_S=1A, T_J=25^\circ C$	V_{SD}	-	-	1.2	V
Reverse Recovery Time	$I_F=2A, dI/dt=100A/\mu s,$ $T_J=25^\circ C$	t_{rr}	-	9.7	-	ns
Reverse Recovery Charge		Q_{rr}	-	5.8	-	nC

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$
- 3.The power dissipation is limited by 150°C junction temperature.
- 4.The data is theoretically the same as ID and IDM , in real applications , should be limited by total power dissipation.

Ratings and Characteristic Curves

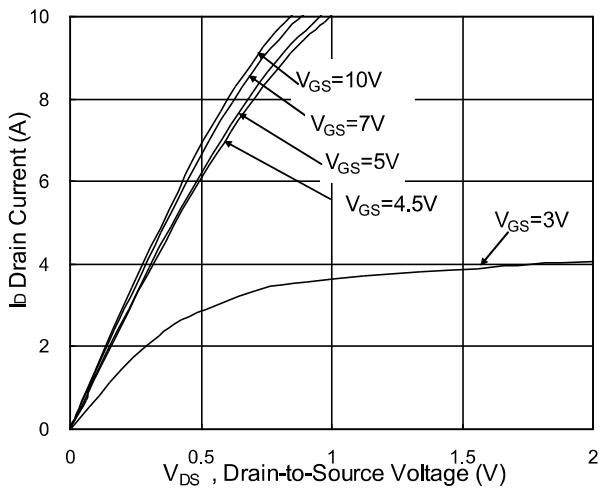


Fig.1 Typical Output Characteristics

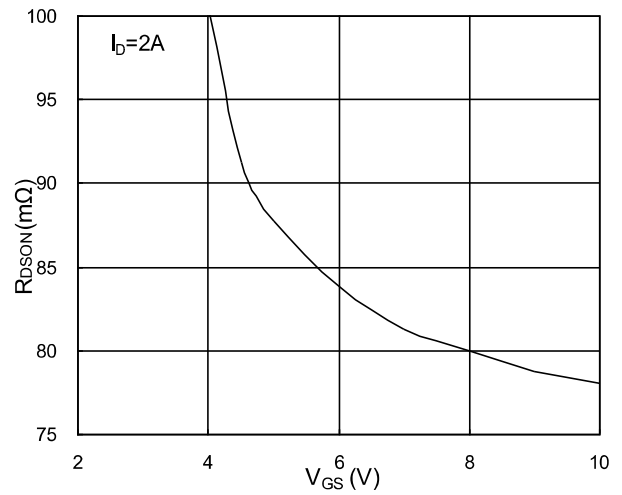


Fig.2 On-Resistance v.s Gate-Source

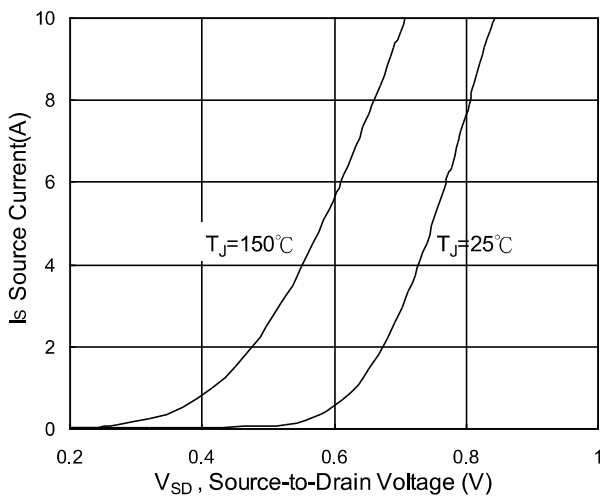


Fig.3 Forward Characteristics of Reverse

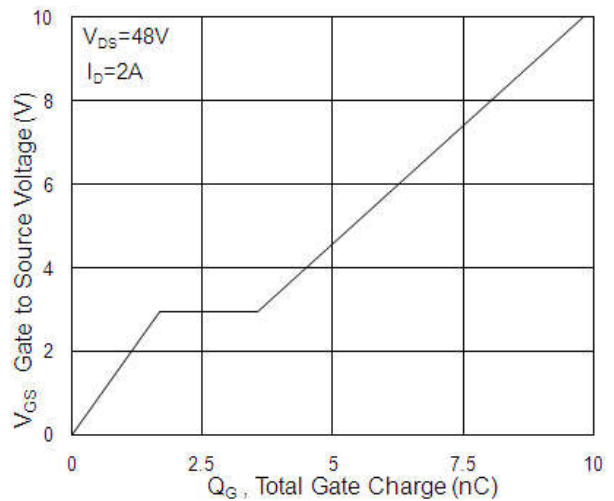


Fig.4 Gate-Charge Characteristics

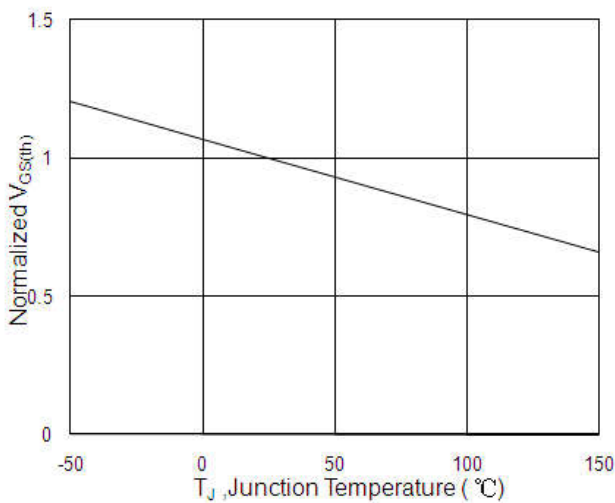


Fig.5 Normalized $V_{GS(th)}$ v.s T_J

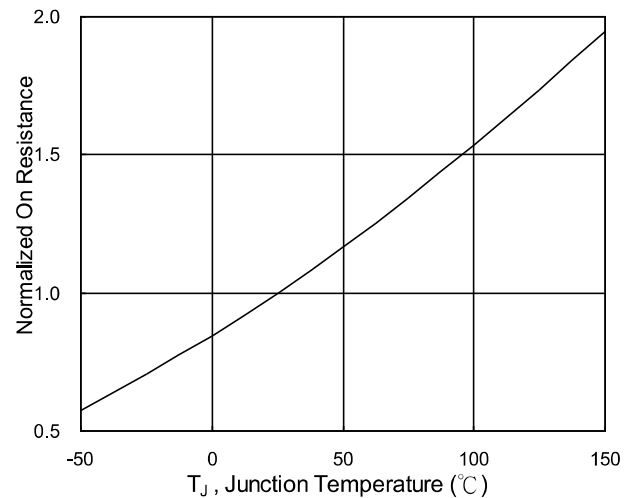


Fig.6 Normalized $R_{DS(on)}$ v.s T_J

Ratings and Characteristic Curves

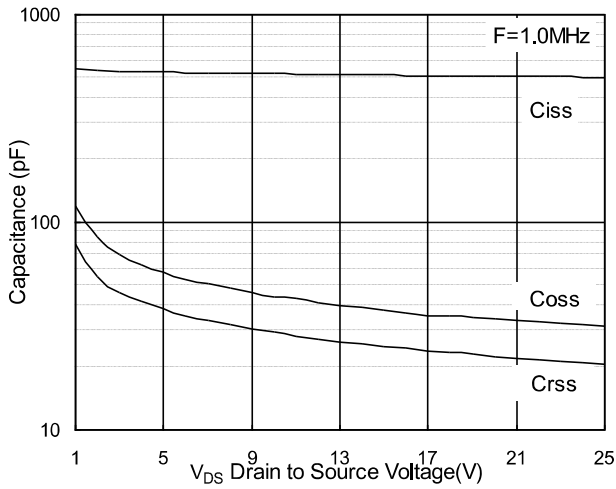


Fig.7 Capacitance

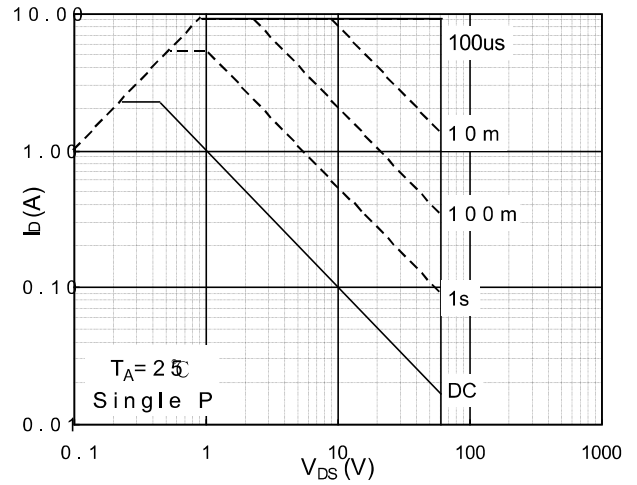


Fig.8 Safe Operating Area

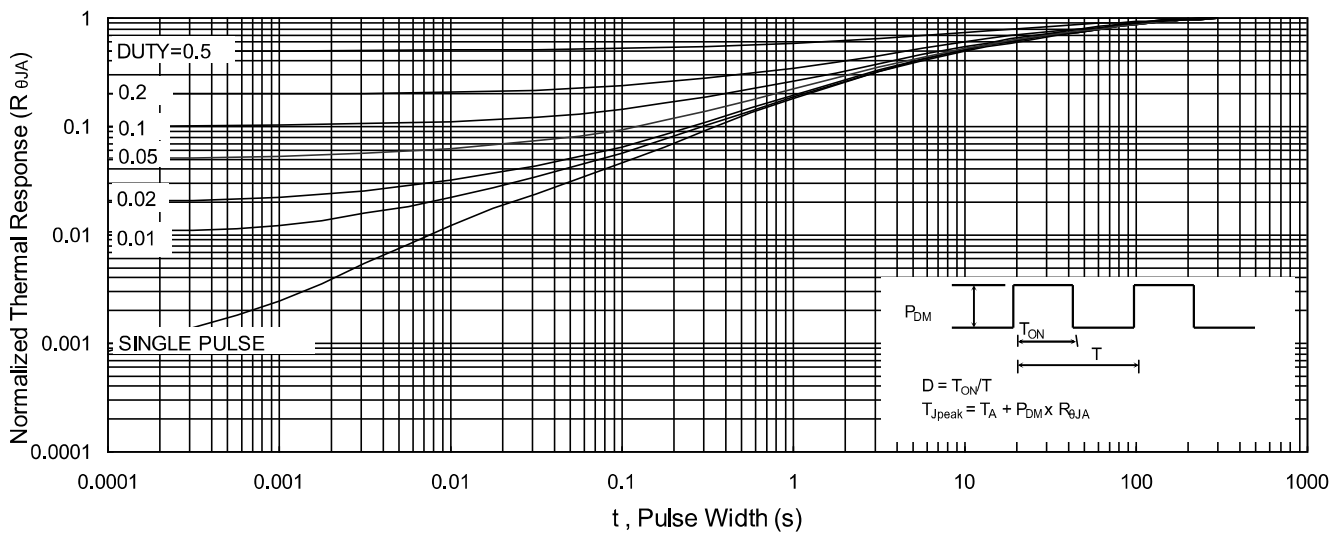


Fig.9 Normalized Maximum Transient Thermal Impedance

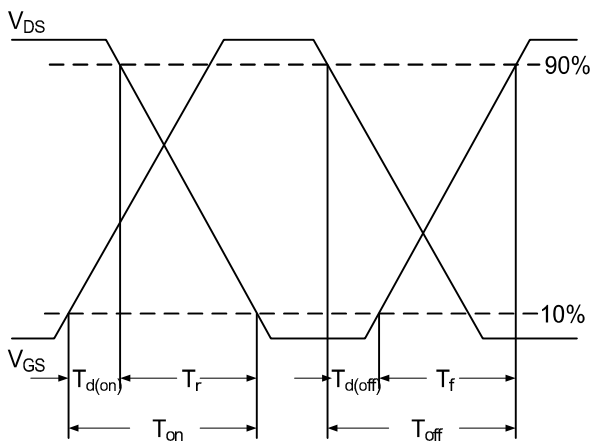


Fig.10 Switching Time Waveform


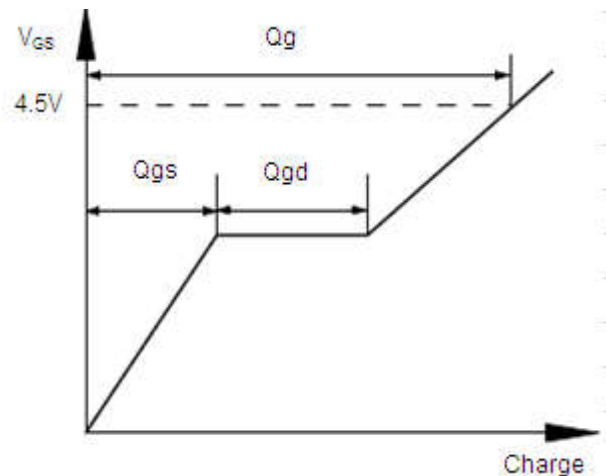


Fig.11 Gate Charge Waveform

SOT-23

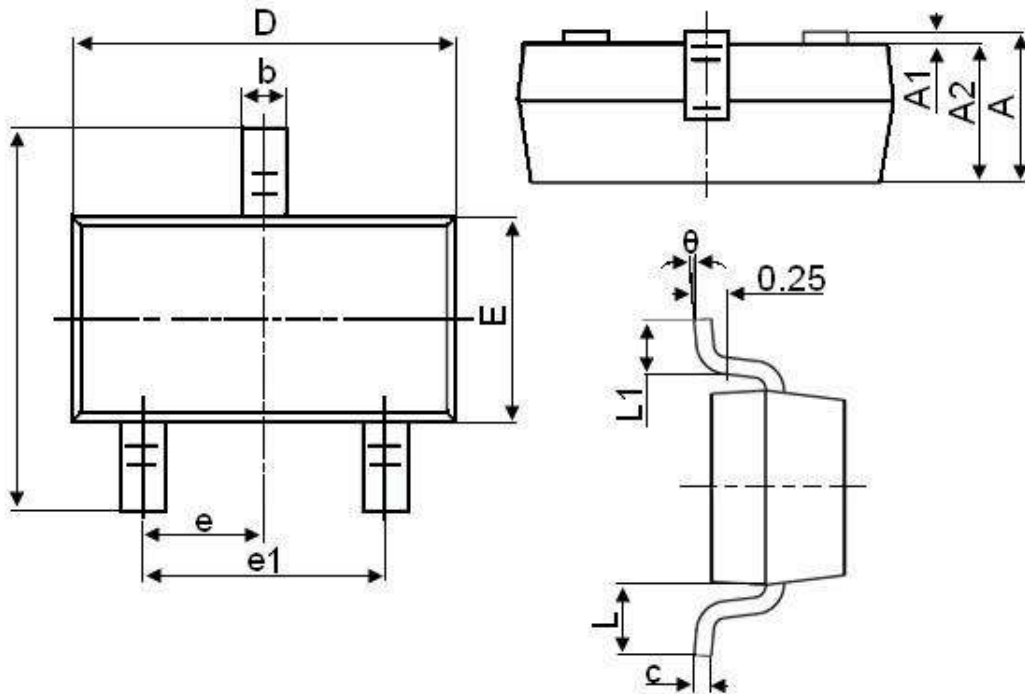

Symbol	Dimensions in Millimeters	
	MIN.	MAX.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.500
θ	0°	8°