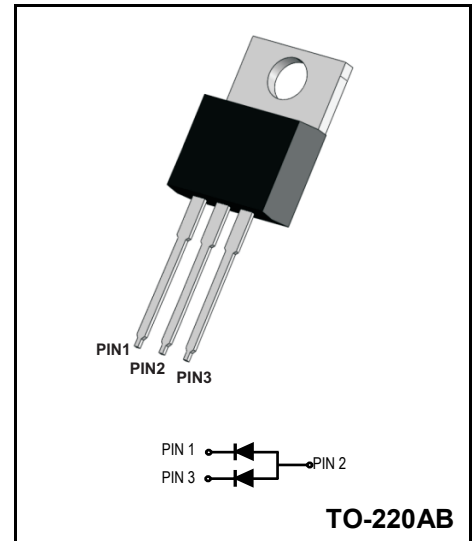


**Super Fast Rectifiers**
**Reverse Voltage - 400V**
**Forward Current - 16A**
**FEATURES**

- Glass passivated chip junctions
- Super fast recovery time for switching mode application
- High Forward Surge Capability
- Low Reverse Current
- Lead free in compliance with EU RoHS 2011/65/EU directive


**MECHANICAL DATA**

- Circuit figure: Common Anode
- Leads: Solderable per mil-std-202, Method 208
- Polarity: as marked
- Mounting torque: 5 in-lbs maximum
- Terminals: Puretin plated
- Weight: TO-220AB 1.85 grams

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (TA=25°C)**

| RATINGS                                                                            | SYMBOL          | Value      | Units   |
|------------------------------------------------------------------------------------|-----------------|------------|---------|
| Maximum repetitive reverse voltage                                                 | $V_{RRM}$       | 400        | V       |
| Maximum RMS voltage                                                                | $V_{RMS}$       | 280        | V       |
| Maximum DC blocking voltage                                                        | $V_{DC}$        | 400        | V       |
| Maximum average forward current                                                    | $I_{AV}$        | 16         | A       |
| Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load | $I_{FSM}$       | 250        | A       |
| Typical thermal resistance per diode (Note 1)                                      | $R_{\theta-JC}$ | 2.5        | °C/W    |
| Operation Junction Temperature and Storage Temperature                             | $T_J, T_{STG}$  | -55 ~ +150 | °C      |
| <b>CHARACTERISTICS</b>                                                             |                 |            |         |
| Typical forward voltage per leg at 8A                                              | $V_F$           | 1.30       | V       |
| Maximum average reverse current at rated DC blocking voltage                       | $I_R$           | 5<br>250   | $\mu A$ |
| Typical reverse recovery time (Note 2)                                             | $T_{RR}$        | 35         | nS      |

Notes: 1. Thermal resistance from junction to case.  
2. Test conditions:  $I_F=0.5A, I_R=1.0A, I_{RR}=0.25A$ .

**Ratings And Characteristic Curves**

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

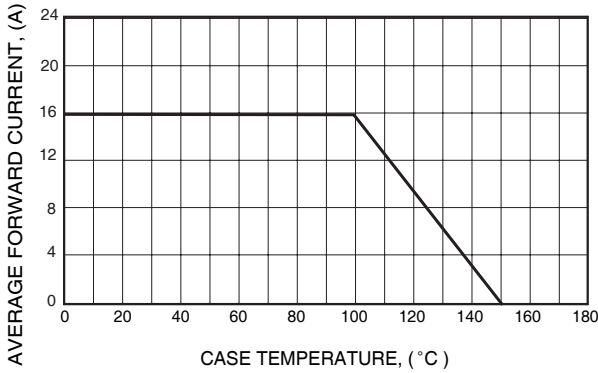


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

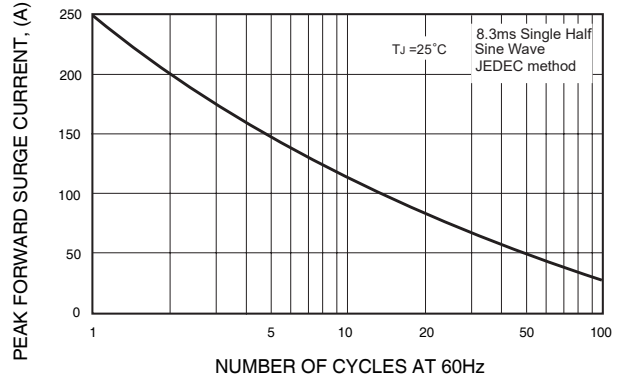


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

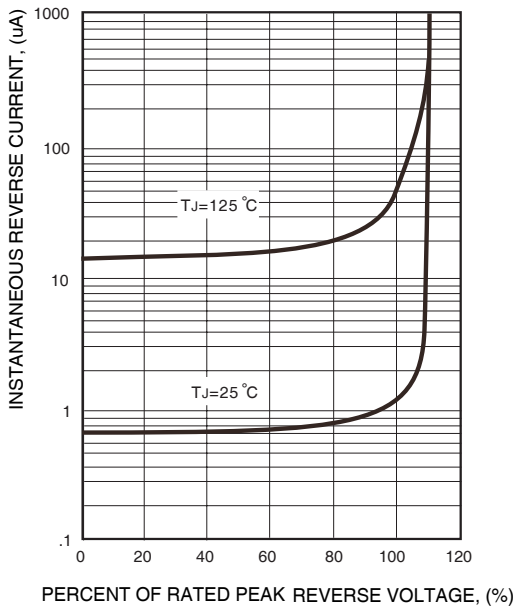


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS



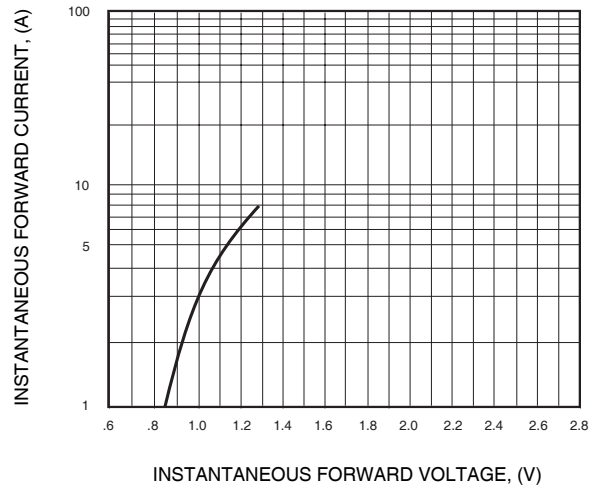


FIG.6- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

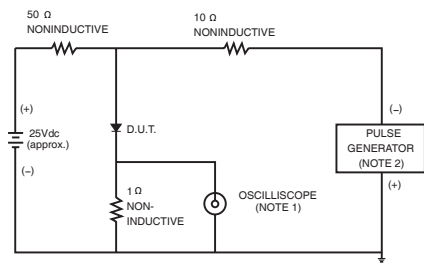

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm.22pF.  
2. Rise Time= 10ns max., Source Impedance= 50 ohms.

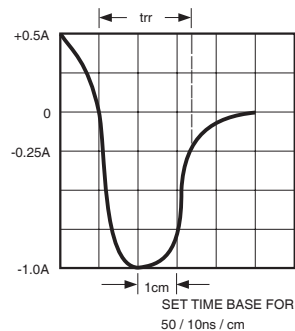

Package outline Dimensions in millimeters

