

**SURFACE MOUNTSCHOTTKY RECTIFIERS**
**Reverse Voltage - 40V**
**Forward Current - 1.0 A**
**FEATURES**

- ◆ Metal silicon junction, majority carrier conduction
- ◆ Heatsink structure
- ◆ Low power loss, high efficiency
- ◆ Super Low VF Schottky barrier diodes
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ Leadfree in comply with EU RoHS 2011/65/EU directives

**MECHANICAL DATA**


- ◆ Case: SOD-323(0805)
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 5.4mg / 0.00019oz

**Maximum Ratings (TA = 25 °C unless otherwise noted)**

Parameter	Symbols	PS14S	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	40	V
Maximum RMS voltage	$V_{RMS}$	28	V
Maximum DC Blocking Voltage	$V_{DC}$	40	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	1.0	A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed On Rated Load	$I_{FSM}$	15	A
Operating junction temperature range	$T_j$	125	°C
Storage temperature range	$T_{stg}$	- 55 to +150	°C

**Electrical Characteristics (TA = 25 °C unless otherwise noted)**


Parameter	Test Conditions	Symbols	PS14S	Units
Minimum Breakdown voltage	$T_a = 25^\circ C, I_R = 1mA$	$V_{BR}$	40	V
Maximum instantaneous forward voltage	$I_F = 1A, T_a = 25^\circ C$	$V_F$	0.58	V
Maximum DC reverse current at rated DC blocking voltage	$T_a = 25^\circ C$	$I_R$	50	uA
Typical junction capacitance	4.0 V, 1 MHz	$C_J$	60	pF

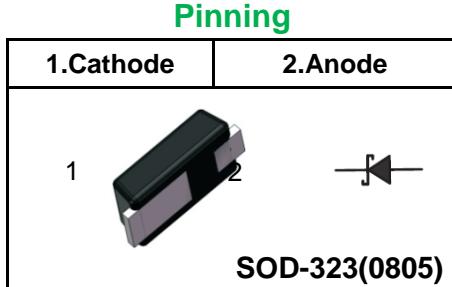


**Marking Code**

<b>PS14S</b>	<b>14S</b>
--------------	------------


**Fig.1 Forward Current Derating Curve**

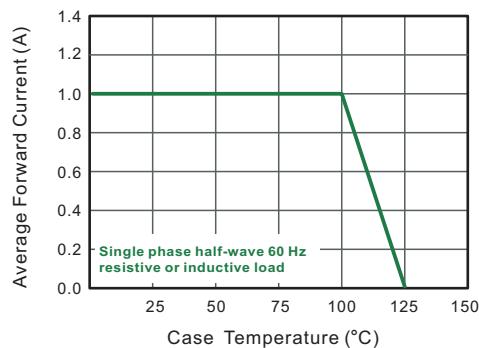


**Fig.2 Typical Reverse Characteristics**

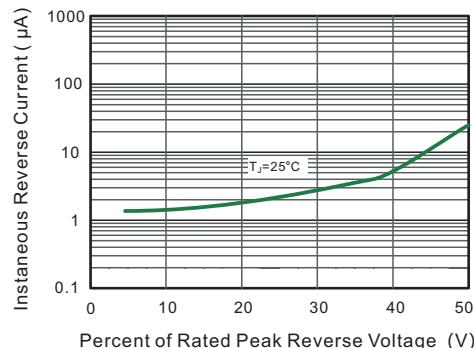


**Fig.3 Typical Forward Characteristic**

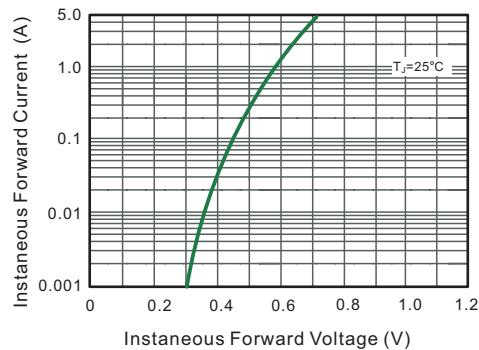

**Fig.4 Typical Junction Capacitance**

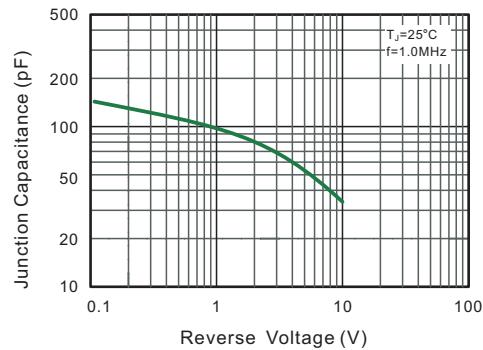


**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

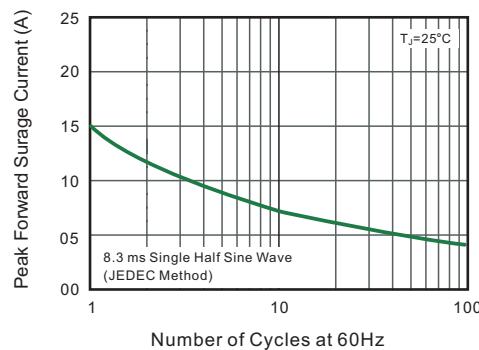

**Package Outline**


**SOD-323(0805)**

Plastic surface mounted package; 2leads

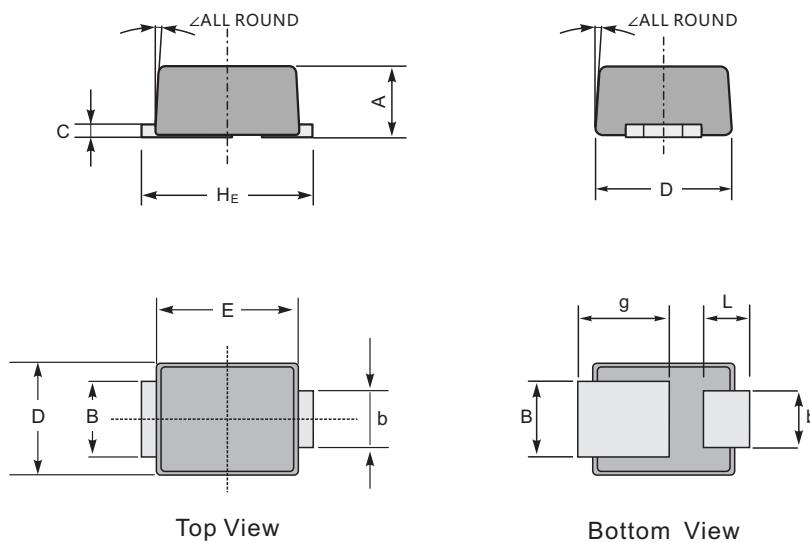

UNIT		A	b	B	C	D	E	$H_E$	g	L	$\angle$
mm	max	0.77	0.75	0.95	0.20	1.45	2.3	2.7	1.55	0.8	$12^\circ$
	min	0.57	0.45	0.65	0.10	1.25	2.1	2.3	1.1	0.4	
mil	max	30	30	37	8	57	91	106	61	31	$12^\circ$
	min	22	18	26	4	49	83	91	43	16	

**The recommended mounting pad size**

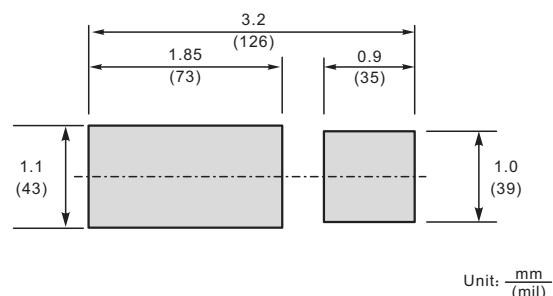

Unit:  $\frac{\text{mm}}{(\text{mil})}$

**Summary of Packing Options**

Package	Packing Description	Packing Quantity	Industry Standard
SOD-323(0805)	Tape/Reel, 7" reel	3000	EIA-481-1