


■ NPN Transistors

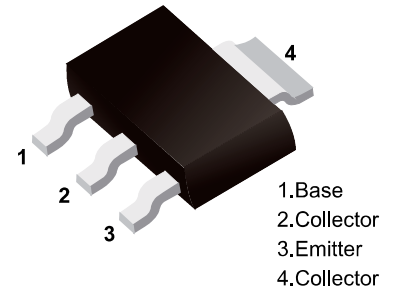

■ Simplified outline(SOT-223)

■ Features

- For AF driver and output stages
- High collector current
- Low collector-emitter saturation voltage
- Complementary to BCP51,BCP52,BCP53

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	BCP54	BCP55	BCP56	Unit
Collector - Base Voltage	V _{CBO}	45	60	100	V
Collector - Emitter Voltage	V _{CEO}	45	60	80	
Emitter - Base Voltage	V _{EBO}	5			
Collector Current - Continuous	I _c	1			A
Collector Power Dissipation	P _c	1.5			W
Thermal Resistance Junction to Ambient	R _{θJA}	83.3			°C/W
Junction Temperature	T _J	150			°C
Storage Temperature Range	T _{stg}	-65 to 150			









■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
Collector- base breakdown voltage	BCP54	$I_c = 100 \mu A, I_E = 0$	45			V	
	BCP55		60				
	BCP56		100				
Collector- emitter breakdown voltage	BCP54	$I_c = 10 mA, I_B = 0$	45			V	
	BCP55		60				
	BCP56		80				
Emitter - base breakdown voltage	V_{EBO}	$I_E = 100 \mu A, I_C = 0$	5				
Collector-base cut-off current	BCP54	I_{CBO}	$V_{CB} = 45 V, I_E = 0$			0.1	uA
	BCP55		$V_{CB} = 60 V, I_E = 0$				
	BCP56		$V_{CB} = 100 V, I_E = 0$				
Emitter cut-off current	I_{EBO}	$V_{EB} = 5V, I_C = 0$			0.1		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_c = 500 mA, I_B = 50mA$			0.5	V	
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_c = 500 mA, I_B = 50mA$			1.2		
Base-emitter voltage	V_{BE}	$V_{CE} = 2V, I_c = 500mA$			1		
DC current gain	$h_{FE(1)}$	$V_{CE} = 2V, I_c = 5mA$	25				
	$h_{FE(2)}$	$V_{CE} = 2V, I_c = 150mA$	63		250		
	$h_{FE(3)}$	$V_{CE} = 2V, I_c = 500mA$	25				
Transition frequency	f_T	$V_{CE} = 10V, I_c = 50mA, f = 100MHz$	100			MHz	

CLASSIFICATION OF $h_{FE(2)}$


Rank	BCP54-10, BCP55-10, BCP56-10	BCP54-16, BCP55-16, BCP56-16
Range	63-160	100-250
Marking	BCP54-10, BCP55-10, BCP56-10	BCP54-16, BCP55-16, BCP56-16

■ Typical Characteristics

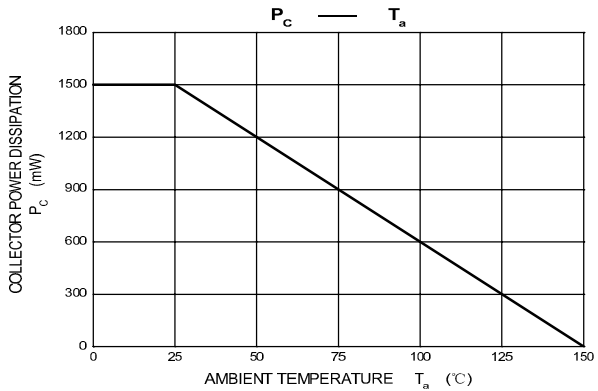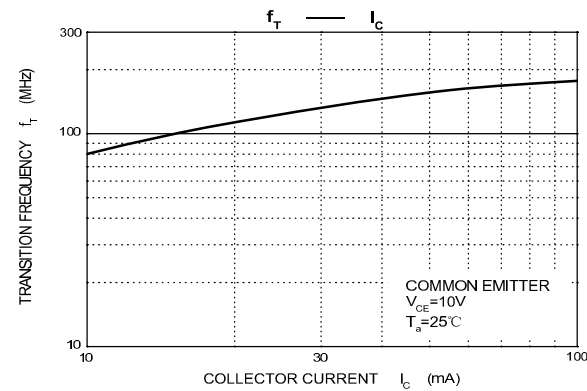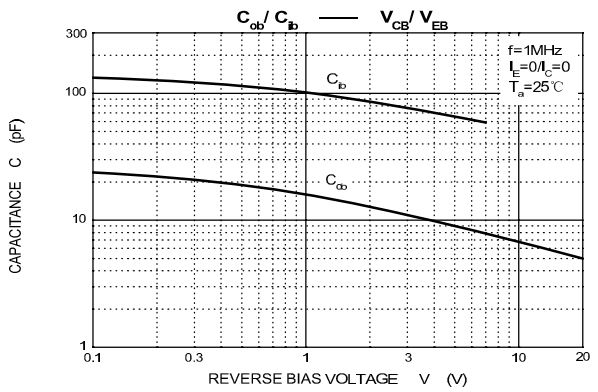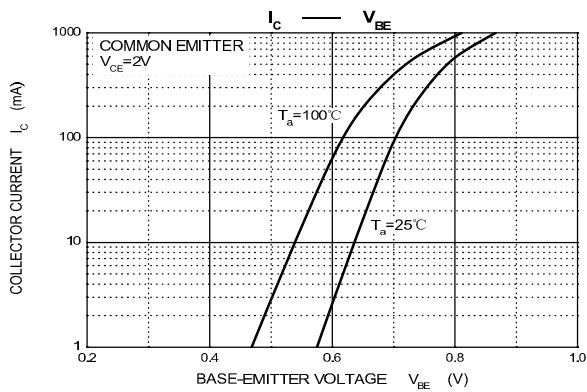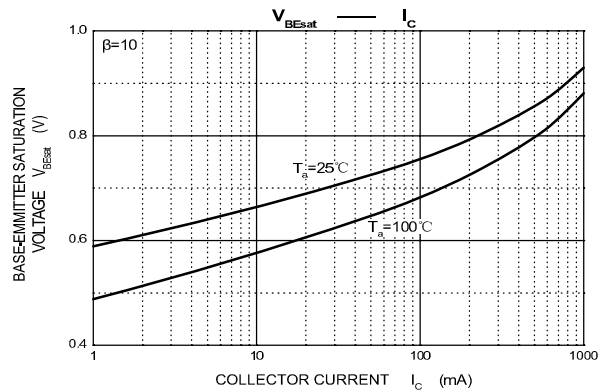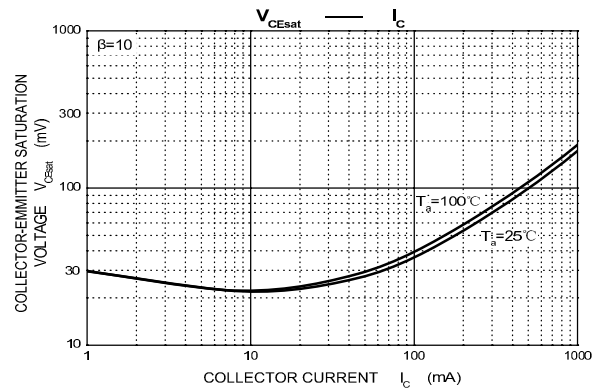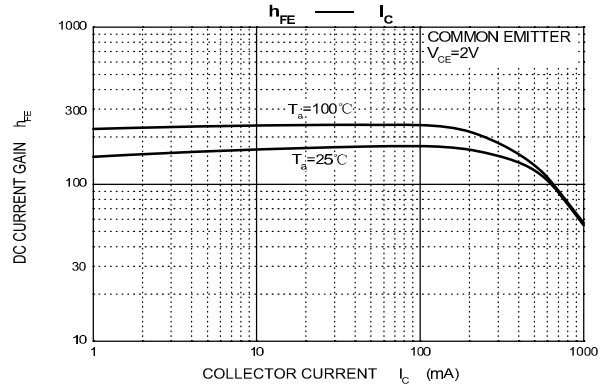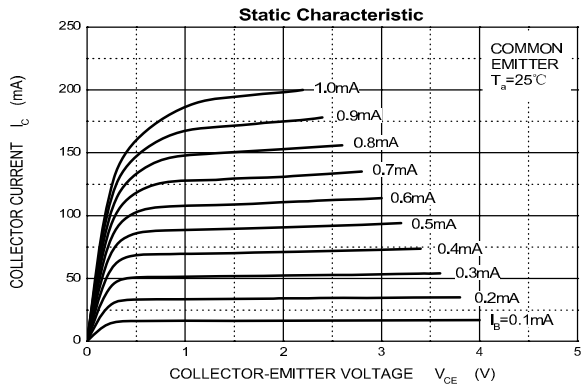

Package Outline

SOT-223

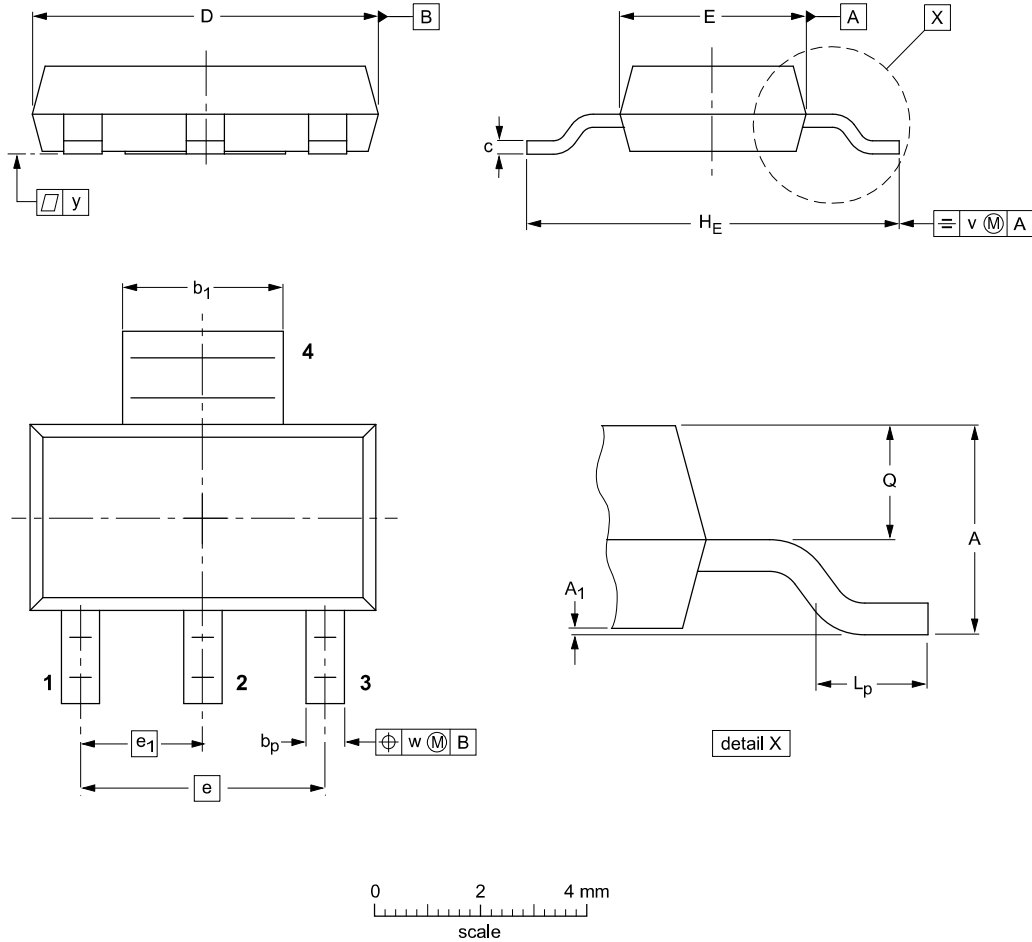

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁	b _p	b ₁	c	D	E	e	e ₁	H _E	L _p	Q	v	w	y
mm	1.8	0.10	0.80	3.1	0.32	6.7	3.7	4.6	2.3	7.3	1.1	0.95	0.2	0.1	0.1
	1.5	0.01	0.60	2.9	0.22	6.3	3.3			6.7	0.7	0.85			