

■ NPN Transistor

■ Features


- Collector Current Capability  $I_c=0.2A$
- Collector Emitter Voltage  $V_{CE0}=40V$
- Complementary to MMBT3906W

■ Marking

Marking	AM
---------	----

■ Absolute Maximum Ratings  $T_a = 25^{\circ}C$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	$V_{CB0}$	60	V
Collector - Emitter Voltage	$V_{CE0}$	40	
Emitter - Base Voltage	$V_{EB0}$	5	
Collector Current - Continuous	$I_c$	200	mA
Collector Power Dissipation	$P_c$	200	mW
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	625	$^{\circ}C/W$
Junction Temperature	$T_J$	150	$^{\circ}C$
Storage Temperature Range	$T_{stg}$	-55 to 150	

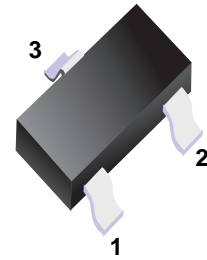

- 1.Base
- 2.Emitter
- 3.Collector







■ Simplified outline(SOT-323)

**■ Electrical Characteristics Ta = 25°C**

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V <sub>CB0</sub>	I <sub>c</sub> = 100 μA, I <sub>E</sub> = 0 (Note.1)	60			V
Collector- emitter breakdown voltage	V <sub>CEO</sub>	I <sub>c</sub> = 1 mA, I <sub>B</sub> = 0 (Note.1)	40			
Emitter - base breakdown voltage	V <sub>EBO</sub>	I <sub>E</sub> = 100 μA, I <sub>C</sub> = 0 (Note.1)	5			
Collector-base cut-off current	I <sub>CB0</sub>	V <sub>CB</sub> = 60 V, I <sub>E</sub> = 0 (Note.1)			60	nA
Collector- emitter cut-off current	I <sub>CEO</sub>	V <sub>CE</sub> = 40 V, I <sub>E</sub> = 0 (Note.1)			700	
Collector- emitter cut-off current	I <sub>CEx</sub>	V <sub>CE</sub> = 30 V, V <sub>BE(off)</sub> = 3V			50	
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> = 5V, I <sub>C</sub> =0			100	
Collector-emitter saturation voltage (Note.1)	V <sub>CE(sat)</sub>	I <sub>C</sub> =10 mA, I <sub>B</sub> =1 mA			0.25	V
		I <sub>C</sub> =50 mA, I <sub>B</sub> =5 mA			0.3	
Base - emitter saturation voltage (Note.1)	V <sub>BE(sat)</sub>	I <sub>C</sub> =10 mA, I <sub>B</sub> =1 mA			0.85	
		I <sub>C</sub> =50 mA, I <sub>B</sub> =5 mA			0.95	
DC current gain (Note.1)	h <sub>FE(1)</sub>	V <sub>CE</sub> = 1V, I <sub>C</sub> = 100 uA	40			
	h <sub>FE(2)</sub>	V <sub>CE</sub> = 1V, I <sub>C</sub> = 1 mA	70			
	h <sub>FE(3)</sub>	V <sub>CE</sub> = 1V, I <sub>C</sub> = 10 mA	100		300	
	h <sub>FE(4)</sub>	V <sub>CE</sub> = 1V, I <sub>C</sub> = 50 mA	60			
Delay time	t <sub>d</sub>	V <sub>CC</sub> =3V, V <sub>BE(off)</sub> =0.5V I <sub>C</sub> =10mA, I <sub>B1</sub> =1mA			35	nS
Rise time	t <sub>r</sub>				35	
Storage time	t <sub>s</sub>				225	
Fall time	t <sub>f</sub>				75	
Collector input capacitance	C <sub>ib</sub>	V <sub>EB</sub> = 0.5V, I <sub>E</sub> = 0, f=1MHz			8	pF
Collector output capacitance	C <sub>ob</sub>	V <sub>CB</sub> = 5V, I <sub>E</sub> = 0, f=1MHz			4	
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = 20V, I <sub>C</sub> = 10mA, f=100MHz	300			MHz


Note.1: Pulse test: pulse width ≤300μs, duty cycle ≤ 2.0%.

■ Typical Characteristics

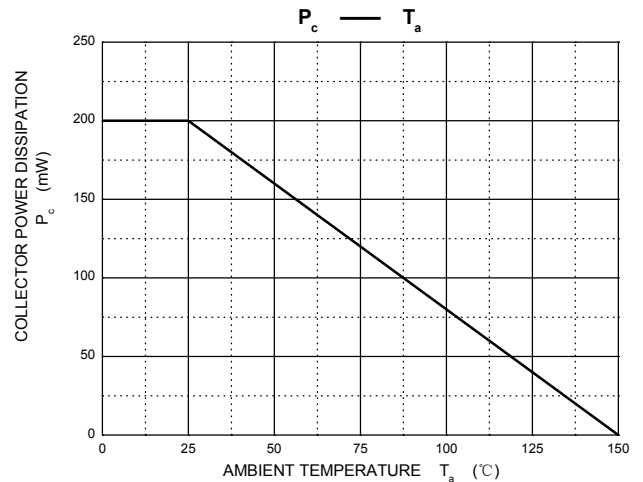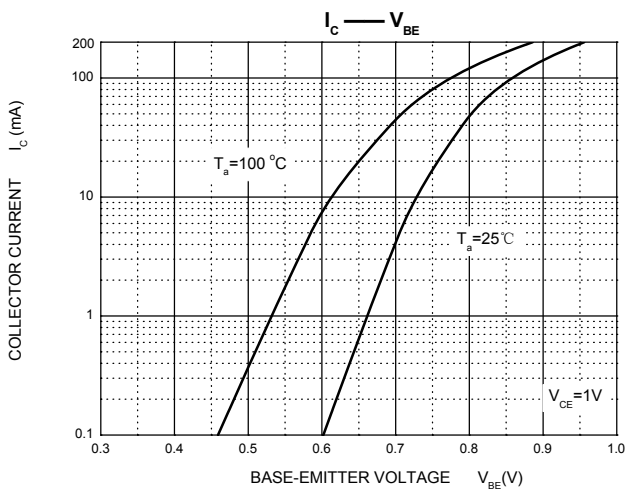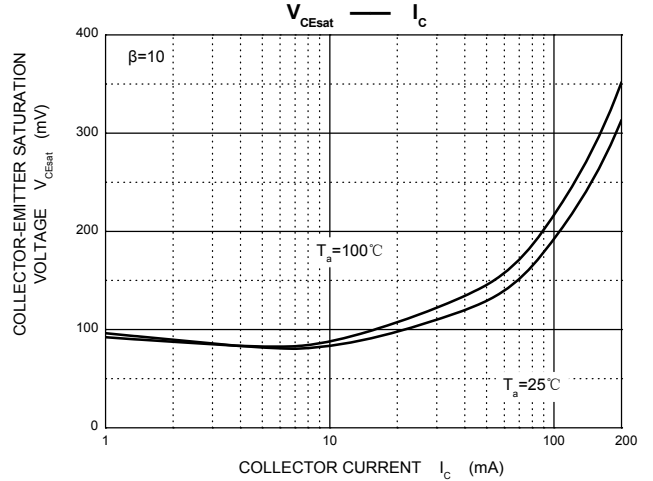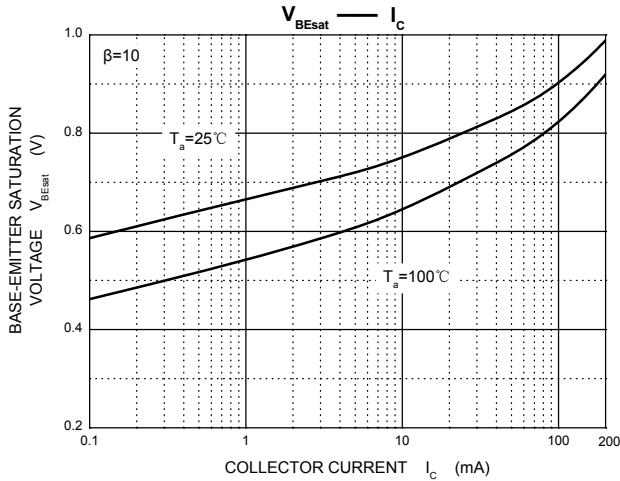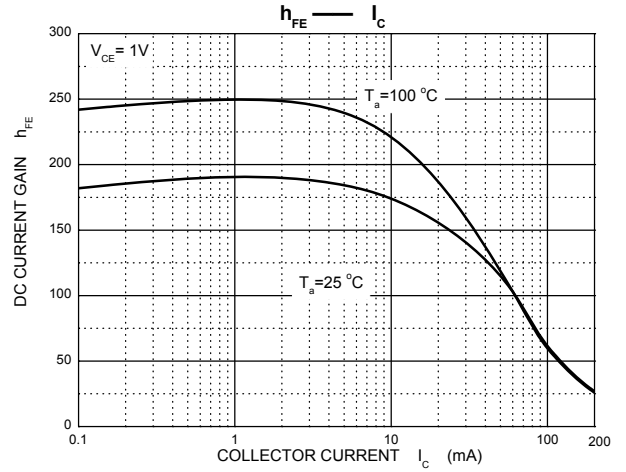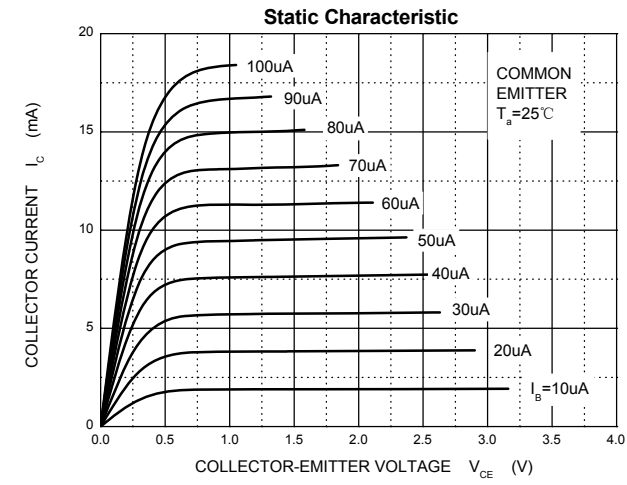

Package Outline

SOT-323

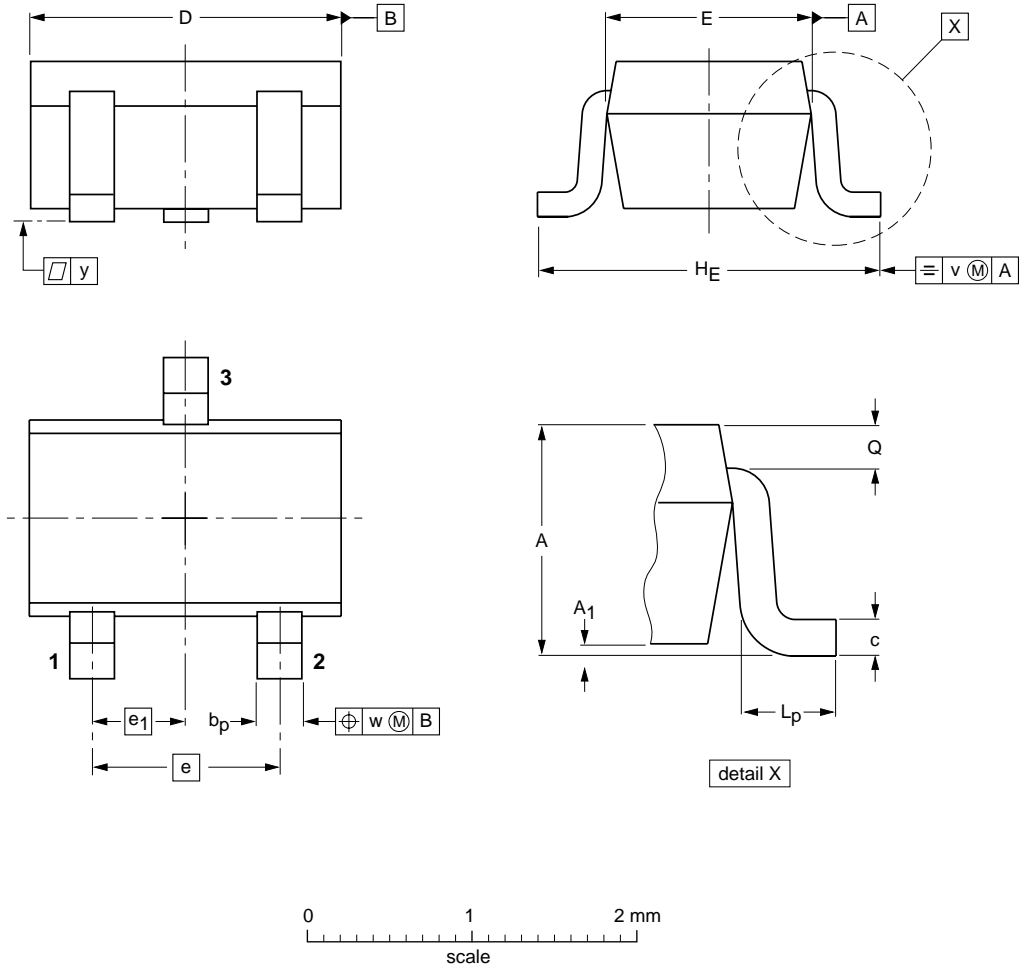

DIMENSIONS (mm are the original dimensions)

UNIT	A	A <sub>1</sub> max	b <sub>p</sub>	c	D	E	e	e <sub>1</sub>	H <sub>E</sub>	L <sub>p</sub>	Q	v	w
mm	1.1 0.8	0.1	0.4 0.3	0.25 0.10	2.2 1.8	1.35 1.15	1.3	0.65	2.2 2.0	0.45 0.15	0.23 0.13	0.2	0.2

Summary of Packing Options

Package	Package Description	Packing Quantity	Industry Standard
SOT-323	Tape/Reel, 7" reel	3000	EIA-481-1