

12A 3Quadrants TRIACs
Product Summary

Symbol	Value	Unit
$I_{T(RMS)}$	12	A
$V_{DRM} V_{RRM}$	600/800	V
V_{TM}	1.55	V

Features

With high ability to withstand the shock loading of large current, With high commutation performances, 3quadrants products especially recommended for use on inductive load.

Application


Washing machine, vacuums, massager, solid state relay, AC Motor speed regulation and so on.

Order Information

Part Number	Package	Marking	Packing	Packing Quantity
BTB12Q	TO-263	BTB12 600BW XXXX	Tape	800PCS/Reel

Absolute maximum ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value		Unit
Repetitive peak off-state voltage	V_{DRM}	600/800		V
Repetitive peak reverse voltage	V_{RRM}	600/800		V
RMS on-state current	$I_{T(RMS)}$	12		A
Non repetitive surge peak on-state current (full cycle, F=50Hz)	I_{TSM}	120		A
I^2t value for fusing ($t_p=10ms$)	I^2t	78		A^2s
Critical rate of rise of on-state current ($ IG = 2 \times GT $)	dI_T/dt	I - II - III	50	A/us
Peak gate current	I_{GM}	4		A
Average gate power dissipation	P_G (AV)	1		W
Junction Temperature	T_J	-40~+125		°C
Storage Temperature	T_{STG}	-40 ~+150		°C

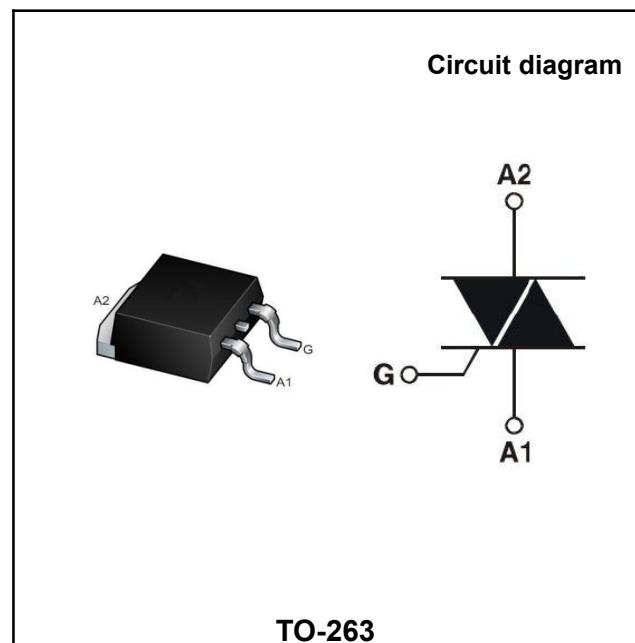
TO-263

Electrical characteristics (TA=25°C, unless otherwise noted)

Parameter	Symbol	Test Condition		Value		Unit
		CW	BW	CW	BW	
Gate trigger current	I_{GT}	$V_D=12V$ $R_L=33\Omega$ $Tj=25^\circ C$	I-II-III	≤ 25	≤ 50	mA
Gate trigger voltage	V_{GT}		I-II-III		≤ 1.3	V
Gate non-trigger voltage	V_{GD}	$V_D = V_{DRM}$ $Tj=125^\circ C$			≥ 0.2	V
latching current	I_L	$I_G = 1.2I_{GT}$	I-III	≤ 40	≤ 50	mA
			II	≤ 80	≤ 100	
Holding current	I_H	$I_T = 500mA$		≤ 25	≤ 50	mA
Critical-rate of rise of commutation voltage	dV_D/dt	$V_D=2/3V_{DRM}$ Gate Open $Tj=125^\circ C$		≥ 200	≥ 400	V/us


STATIC CHARACTERISTICS

Forward "on" voltage	V_{TM}	$I_{TM} = 17A$ $t_p=380\mu s$	≤ 1.55	V
Repetitive Peak Off-State Current	I_{DRM}	$V_D=V_{DRM}$ $V_R=V_{RRM}$	≤ 10	UA
Repetitive Peak Reverse Current	I_{RRM}		≤ 1	mA

THERMAL RESISTANCES

Thermal resistance	$R_{th(j-c)}$	Junction to case(AC)	1.4	$^{\circ}C/W$
	$R_{th(j-a)}$	Junction to ambient	45	$^{\circ}C/W$

Ordering Information

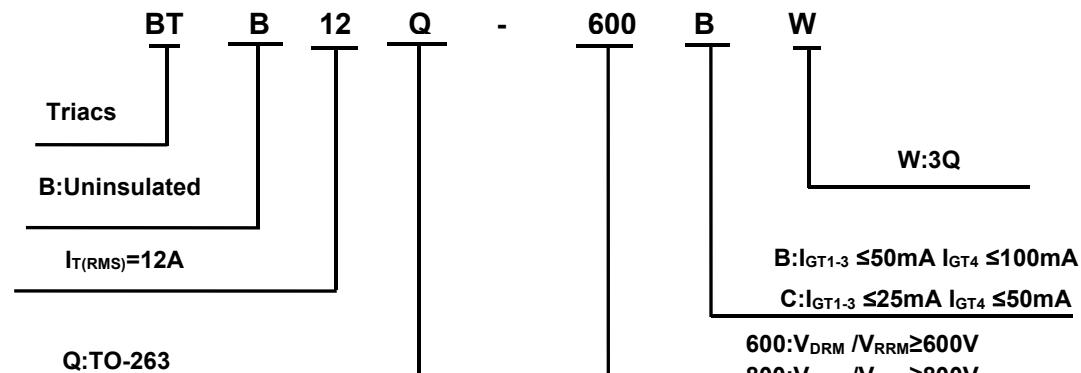

Typical Characteristics

FIG.1: Maximum power dissipation versus RMS on-state current (full cycle)

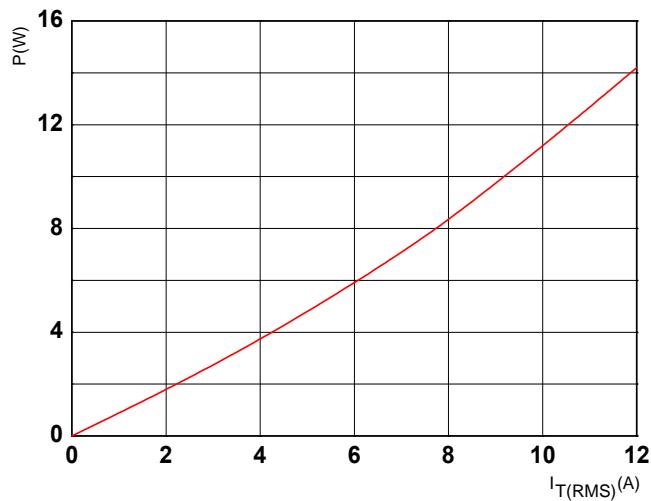


FIG.2: RMS on-state current versus case temperature (full cycle)

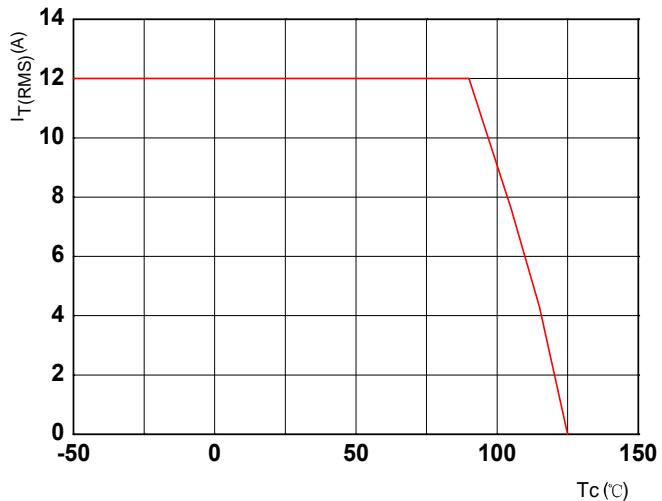


FIG.3: Surge peak on-state current versus number of cycles

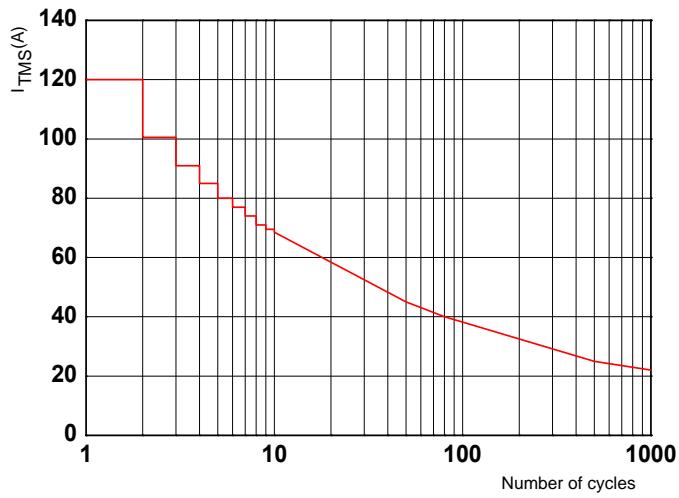


FIG.4: On-state characteristics (maximum values)

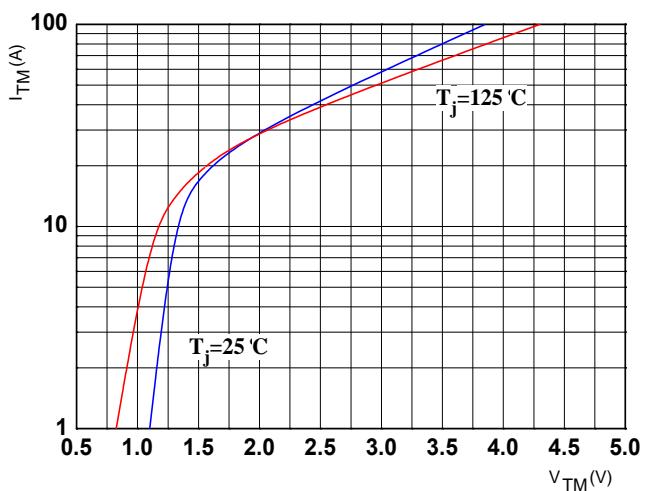


FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width tp < 10ms



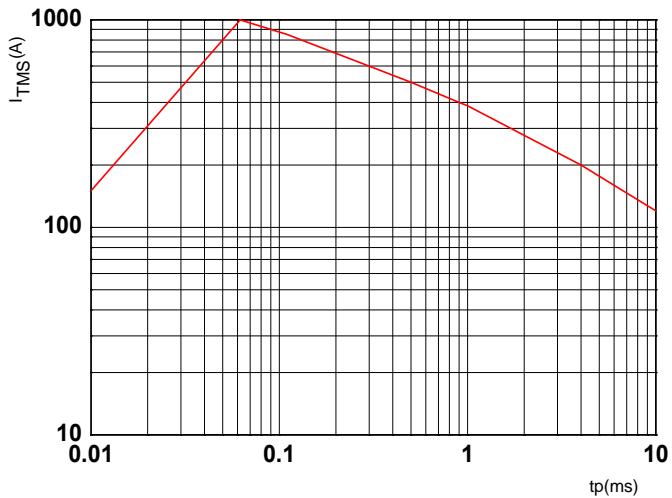


FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature (typical values)

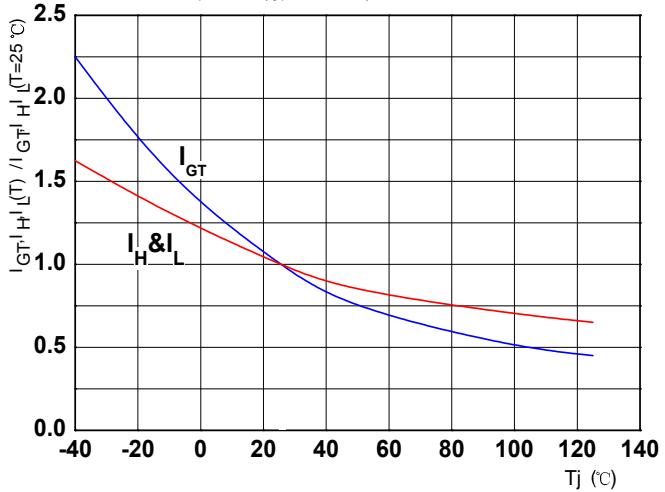

Package Information

TO-263

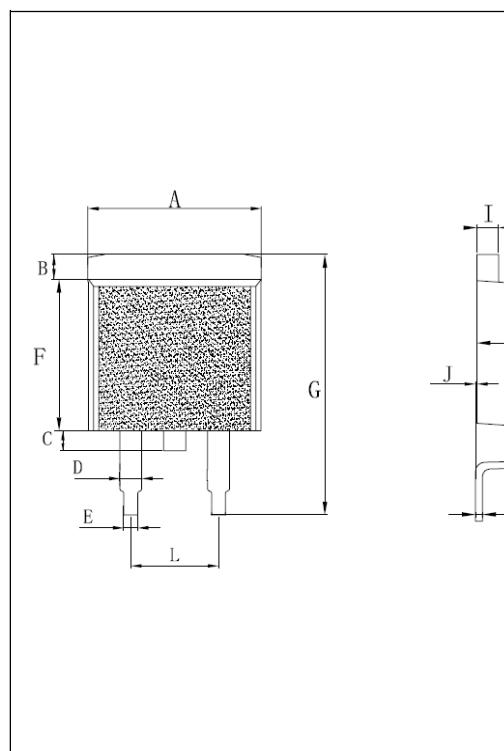

The technical drawing illustrates the TO-263 package in two views: a top view showing the lead frame and a side view showing the profile. Dimension labels are as follows:

- A: Total width of the lead frame.
- B: Width of the lead frame at the base.
- C: Thickness of the lead frame.
- D: Width of the lead frame at the top.
- E: Width of the lead frame at the bottom.
- F: Total height of the lead frame.
- G: Total height of the package.
- H: Width of the lead frame at the bottom of the body.
- I: Width of the lead frame at the top of the body.
- J: Distance from the bottom of the lead frame to the bottom of the body.
- K: Width of the body.
- L: Length of the lead frame.

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	9.7	10.4	0.381	0.409
B	1.31	1.62	0.051	0.063
C	0.65	1.22	0.025	0.048
D	1.15	1.36	0.045	0.053
E	0.62	0.95	0.024	0.037
F	8.75	9.32	0.344	0.366
G	14.75	15.8	0.580	0.622
H	0.32	0.48	0.012	0.018
I	1.18	1.36	0.046	0.053
J	0	0.15	0	0.005
K	4.38	4.86	0.172	0.191
L	4.85	5.23	0.190	0.205