

0.8A Sensitive Gate SCRs

Product Summary


Symbol	Value	Unit
$I_{T(AV)}$	0.8	A
$V_{DRM} V_{RRM}$	600/800	V
I_{GT}	10~200	μA

Features

With high ability to withstand the shock loading of large current, Provide high dv/dt rate with strong resistance to electromagnetic interference.

Application

Power charger, T-tools, massager, solid state relay, AC Motor speed regulation and so on.

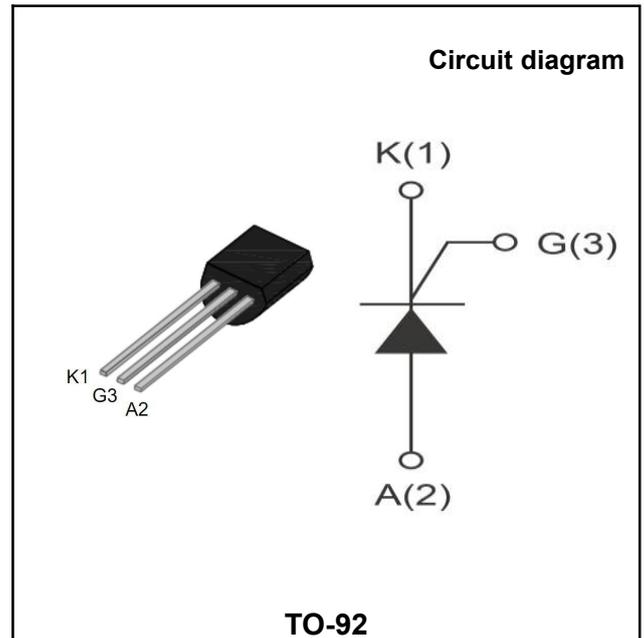

Order Information

Part Number	Package	Marking	Packing	Packing Quantity
BT169G	TO-92	BT169G XXXX	Box	1000 PCS/Box

Absolute maximum ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Repetitive peak off-state voltage	V_{DRM}	600/800	V
Repetitive peak reverse voltage	V_{RRM}	600/800	V
RMS on-state current	$I_T(RMS)$	0.8	A
Non repetitive surge peak on-state current (full cycle, F=50Hz)	I_{TSM}	8	A
I^2t value for fusing (tp=10ms)	I^2t	0.32	A ² s
Critical rate of rise of on-state current ($I_G = 2 \times I_{GT}$)	di_T/dt	50	A/ μs
Peak gate current	I_{GM}	1	A
Average gate power dissipation	$P_G (AV)$	0.1	W
Junction Temperature	T_J	-40~+110	°C
Storage Temperature	T_{STG}	-40 ~+150	°C

Electrical characteristics (TA=25°C, unless otherwise noted)

Parameter	Symbol	Test Condition	Value		Unit
			Min	Max	
Gate trigger current	I_{GT}	$V_D=12V$ $I_T=10mA$ $T_J=25^\circ C$	10	200	μA
Gate trigger voltage	V_{GT}		-	0.8	V
Gate non-trigger voltage	V_{GD}	$V_D = 1/2V_{DRM}$ $T_J = 110^\circ C$	0.2	-	V
latching current	I_L	$V_D = 12V$ $I_G=0.5mA$ $R_{GK}=1k\Omega$ $T_J=25^\circ C$	-	3	mA
Holding current	I_H		-	4	mA
Critical-rate of rise of commutation voltage	dV_D/dt	$V_D=2/3V_{DRM}$ Gate Open $T_J=110^\circ C$	10	-	V/us


STATIC CHARACTERISTICS

Forward "on" voltage	V_{TM}	$I_{TM} = 1.2A$ $t_p=380us$	-	1.5	V	
Repetitive Peak Off-State Current	I_{DRM}	$V_D=V_{DRM}$ $V_R=V_{RRM}$	$T_J=25^\circ C$	-	5	μA
Repetitive Peak Reverse Current	I_{RRM}		$T_J=110^\circ C$	-	0.1	mA

THERMAL RESISTANCES

Thermal resistance	$R_{th(j-c)}$	Junction to case(AC)	TYP.	60	$^\circ C/W$
	$R_{th(j-a)}$	Junction to ambient	TYP.	150	$^\circ C/W$

Ordering Information

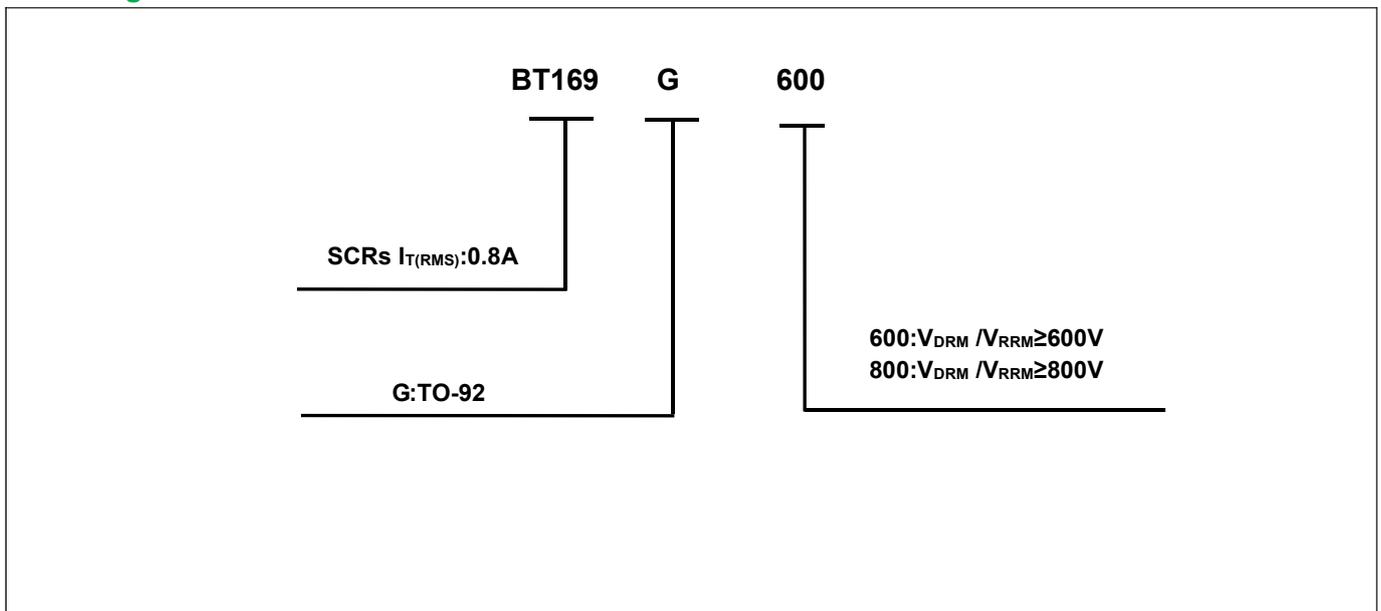

Typical Characteristics

FIG.1: Maximum power dissipation versus RMS on-state current (full cycle)

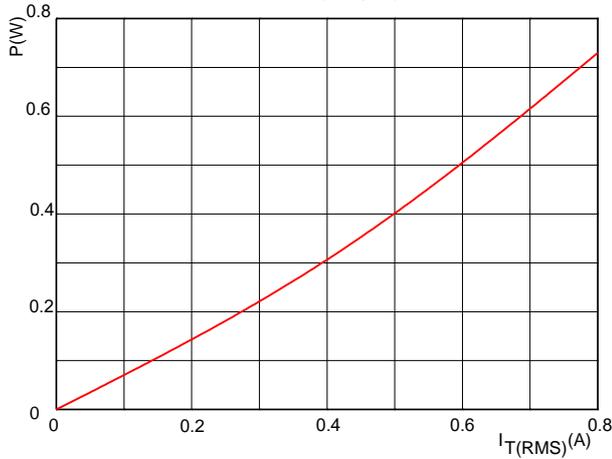


FIG.2: RMS on-state current versus case temperature (full cycle)

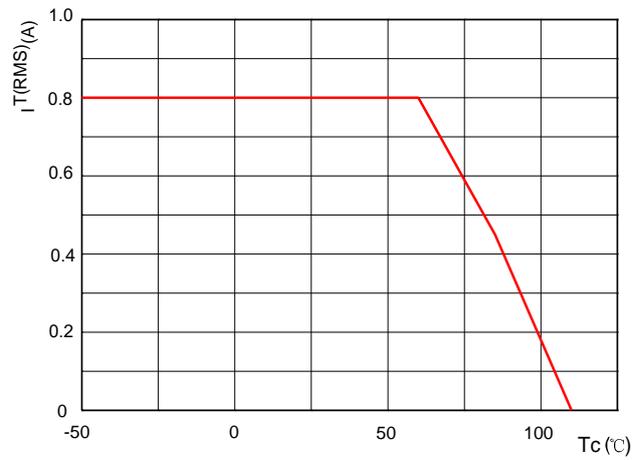


FIG.3: Surge peak on-state current versus number of cycles

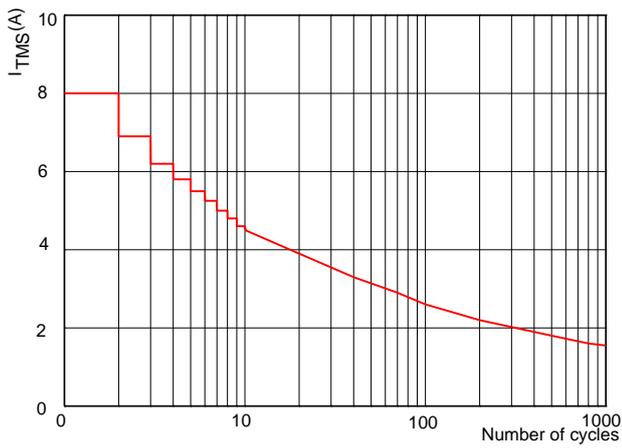


FIG.4: On-state characteristics (maximum values)

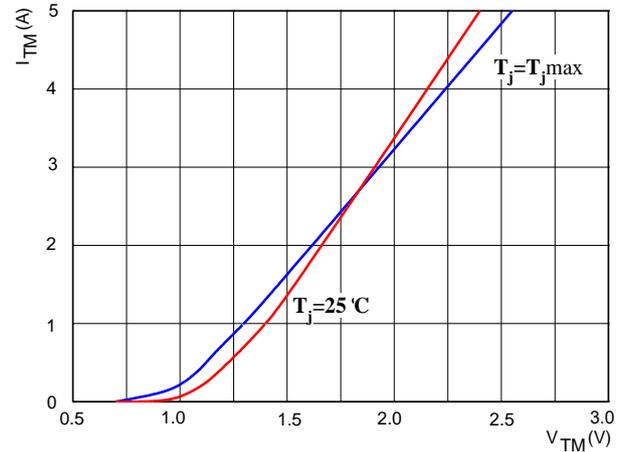


FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 10\text{ms}$


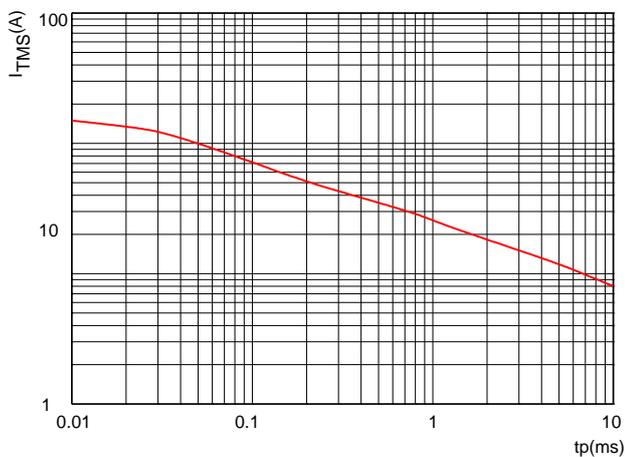


FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature (typical values)



Package Information

TO-92

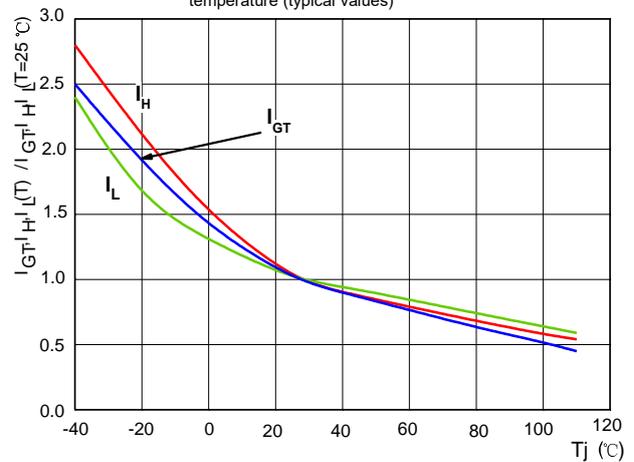