


■ Three-Terminal Positive Voltage Regulator

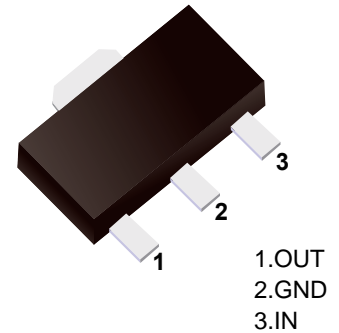

■ Features

- Maximum Output current  $I_o$ : 0.1A
- Output Voltage  $V_o$ : 15V
- Continuous Total Dissipation  $P_d$ : 0.5W ( $T_a = 25^\circ\text{C}$ )

■ Simplified outline(SOT-89)


■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Rating	Unit
Input Voltage	$V_i$	35	V
Operating Junction Temperature Range	$T_{opr}$	-55 ~ +125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 ~ +150	$^\circ\text{C}$

■ Electrical Characteristics ( $V_i=23\text{V}$ ,  $I_o=40\text{mA}$ ,  $C_i=0.33\ \mu\text{F}$ ,  $C_o=0.1\ \mu\text{F}$ , unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	$V_o$	$T_J = 25^\circ\text{C}$	14.4	15	15.6	V
		$T_J = 0\sim 125^\circ\text{C}$ , $17.5\text{V} \leq V_i \leq 30\text{V}$ , $I_o = 1\text{mA} \sim 40\text{mA}$	14.25	15	15.75	V
		$T_J = 0\sim 125^\circ\text{C}$ , $V_i = 23\text{V}$ , $I_o = 1\text{mA} \sim 70\text{mA}$	14.25	15	15.75	V
Load Regulation	$\Delta V_o$	$T_J = 25^\circ\text{C}$ , $V_i = 23\text{V}$ , $I_o = 1\text{mA} \sim 100\text{mA}$		25	150	mV
		$T_J = 25^\circ\text{C}$ , $V_i = 23\text{V}$ , $I_o = 1\text{mA} \sim 40\text{mA}$		15	75	mV
Line Regulation	$\Delta V_o$	$T_J = 25^\circ\text{C}$ , $17.5\text{V} \leq V_i \leq 30\text{V}$ , $I_o = 40\text{mA}$		65	300	mV
		$T_J = 25^\circ\text{C}$ , $19\text{V} \leq V_i \leq 30\text{V}$ , $I_o = 40\text{mA}$		58	250	mV
Quiescent Current	$I_q$	$T_J = 25^\circ\text{C}$		4.6	6.5	mA
Quiescent current Change	$\Delta I_q$	$T_J = 0\sim 125^\circ\text{C}$ , $19\text{V} \leq V_i \leq 30\text{V}$ , $I_o = 40\text{mA}$			1.5	mA
		$T_J = 0\sim 125^\circ\text{C}$ , $V_i = 23\text{V}$ , $1\text{mA} \leq I_o \leq 40\text{mA}$			0.1	
Output Noise Voltage	$V_N$	$T_J = 25^\circ\text{C}$ , $10\text{Hz} \leq f \leq 100\text{KHz}$		82		$\mu\text{V}$
Ripple Rejection	RR	$T_J = 0\sim 125^\circ\text{C}$ , $18.5\text{V} \leq V_i \leq 28.5\text{V}$ , $f = 120\text{Hz}$	34	39		dB
Dropout Voltage	$V_D$	$T_J = 25^\circ\text{C}$		1.7		V

■ Typical Application

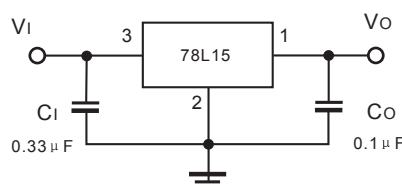


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.


■ Typical Characteristics

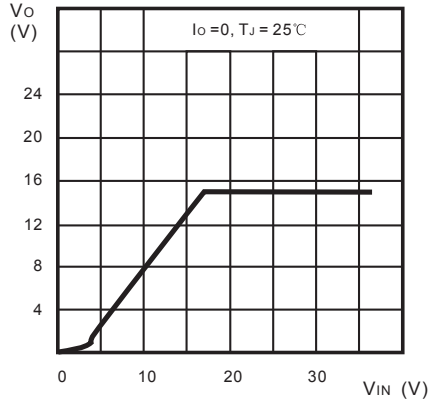


Output Characteristics

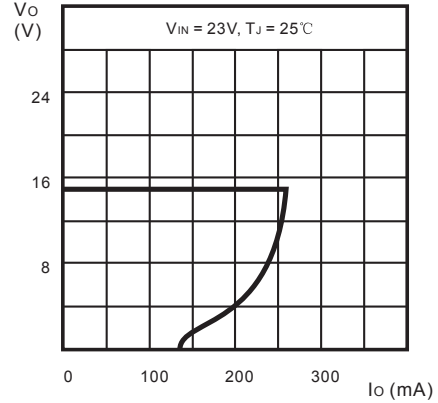


Load Characteristics

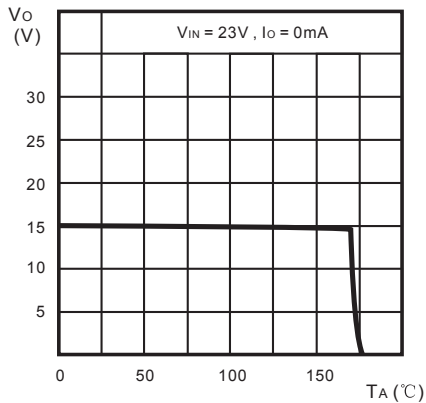

Thermal Shutdown

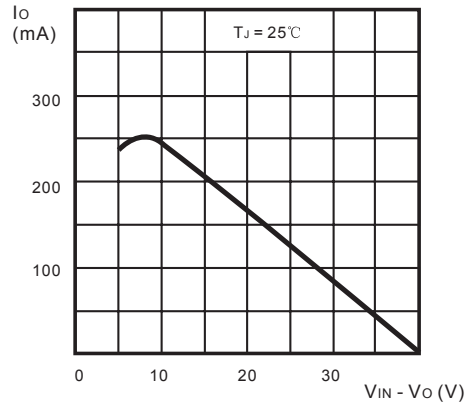


Short Circuit Output Current

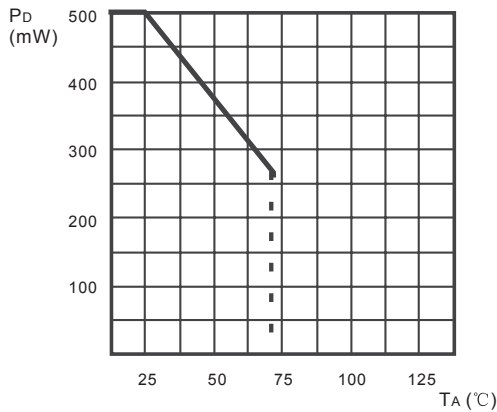

Power Dissipation vs. Ambient Temperature

Package Outline

SOT-89

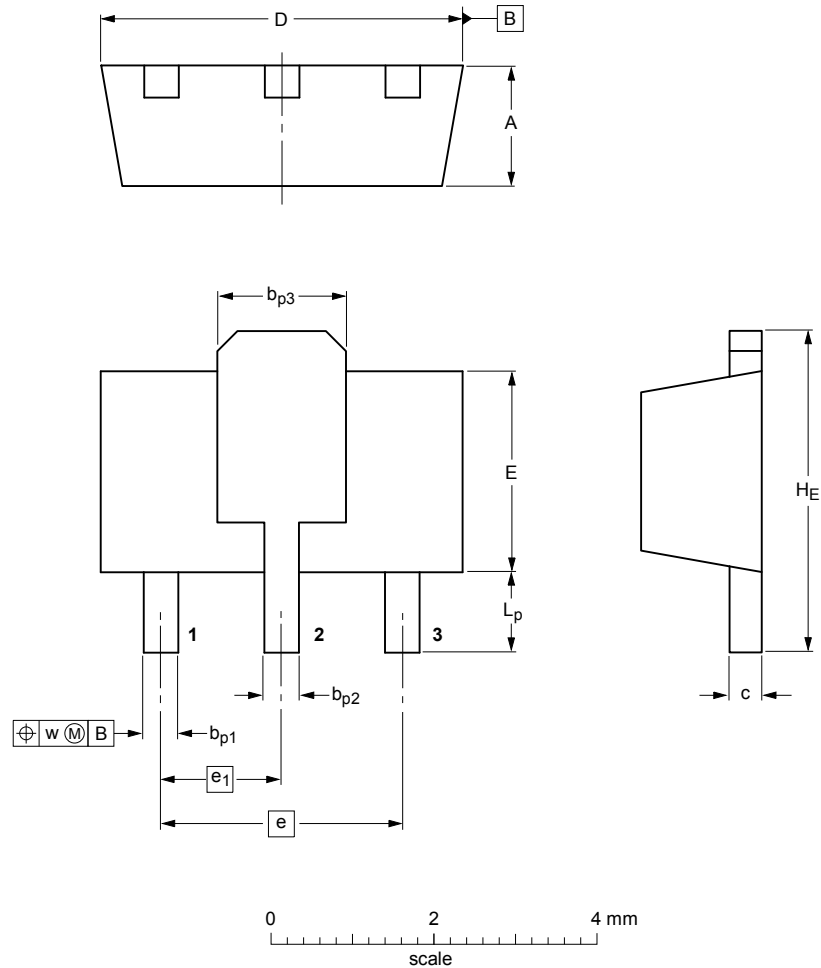

DIMENSIONS (mm are the original dimensions)

UNIT	A	$b_{p1}$	$b_{p2}$	$b_{p3}$	c	D	E	e	$e_1$	$H_E$	$L_p$	w
mm	1.6 1.4	0.48 0.35	0.53 0.40	1.8 1.4	0.44 0.23	4.6 4.4	2.6 2.4	3.0	1.5	4.25 3.75	1.2 0.8	0.13

Summary of Packing Options

Package	Package Description	Packing Quantity	Industry Standard
SOT-89	Tape/Reel, 7" reel	1000	EIA-481-1