



■ Adjustable Accurate Reference Source

DEVICE DESCRIPTION

The TL431 is a three-terminal adjustable shunt regulator offering excellent temperature stability . This device has a typical dynamic output impedance of 0.2Ω . The device can be used as a replacement for zener diodes in many applications.

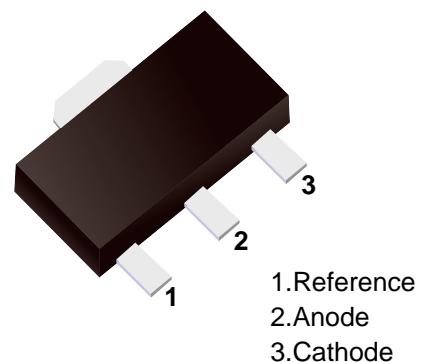

■ Simplified outline(SOT-89)



■ FEATURES

- The output voltage can be adjusted to 36V
- Low dynamic output impedance, its typical value is 0.2Ω
- Trapping current capability is 1 to 100mA
- Low output noise voltage
- Fast on -state response
- The effective temperature compensation in the working range of full temperature
- The typical value of the equivalent temperature factor in the whole temperature scope is 50 ppm/ $^{\circ}\text{C}$

■ APPLICATION

- Shunt Regulator
- High-Current Shunt Regulator
- Precision Current Limiter

■ ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Cathode Voltage	V_{KA}	36	V
Cathode Current Range (Continuous)	I_{KA}	-100~+150	mA
Reference Input Current Range	I_{ref}	0.05~+10	mA
Power Dissipation	P_D	500	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	250	$^{\circ}\text{C}/\text{W}$
Operating Temperature	T_{opr}	-25~+85	$^{\circ}\text{C}$
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65~+150	$^{\circ}\text{C}$


■ ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Reference input voltage	V _{ref}	V _{KA} =V _{REF} , I _{KA} =10mA	2.487	2.5	2.513	V	
Deviation of reference Input voltage over temperature (note)	△V _{ref} /△T	V _{KA} =V _{REF} , I _{KA} =10mA T _{MIN} ≤T _a ≤T _{MAX}		4.5	17	mV	
Ratio of change in reference Input voltage to the change in cathode voltage	△V _{ref} /△V _{KA}	I _{KA} =10mA	△V _{KA} =10V~V _{REF}		-1.0	-2.7	mV/V
			△V _{KA} =36V~10V		-0.5	-2.0	mV/V
Reference input current	I _{ref}	I _{KA} = 10mA, R ₁ =10kΩ R ₂ =∞		1.5	4	μA	
Deviation of reference input current over full temperature range	△I _{ref} /△T	I _{KA} =10mA, R ₁ =10kΩ R ₂ =∞ T _A =-25 to 85°C		0.4	1.2	μA	
Minimum cathode current for regulation	I _{KA(min)}	V _{KA} =V _{REF}		0.45	1.0	mA	
Off-state cathode current	I _{KA(OFF)}	V _{KA} =36V , V _{REF} =0		0.05	1.0	μA	
Dynamic impedance	Z _{KA}	V _{KA} =V _{REF} , I _{KA} =1 to 100mA f≤1.0kHz		0.15	0.5	Ω	

Note:T_{MIN}=-25°C , T_{MAX}=+85°C

Package Outline

SOT-89

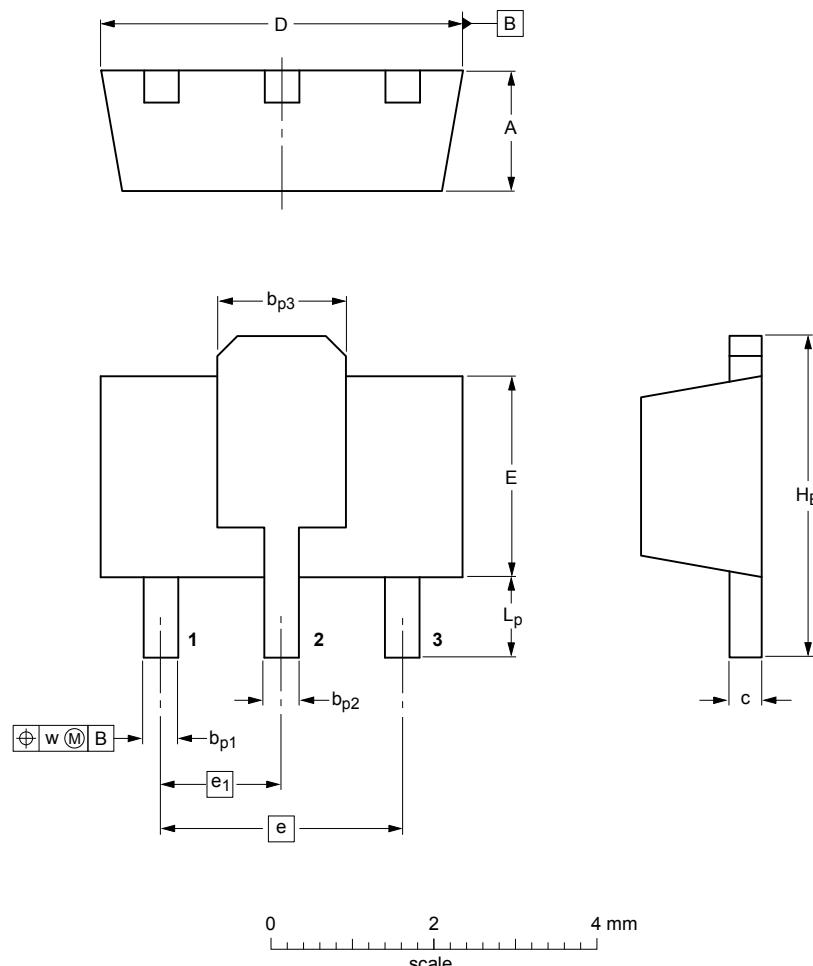

DIMENSIONS (mm are the original dimensions)

UNIT	A	b_{p1}	b_{p2}	b_{p3}	c	D	E	e	e_1	H_E	L_p	w
mm	1.6 1.4	0.48 0.35	0.53 0.40	1.8 1.4	0.44 0.23	4.6 4.4	2.6 2.4	3.0	1.5	4.25 3.75	1.2 0.8	0.13

Summary of Packing Options

Package	Package Description	Packing Quantity	Industry Standard
SOT-89	Tape/Reel, 7" reel	1000	EIA-481-1