


■ Three-Terminal Negative Voltage Regulator



■ Simplified outline(SOT-89)

■ Features

- Maximum output current I_{OM} : 0.1A.
- Output voltage: V_o : -8V.
- Continuous total dissipation P_D : 0.5 W


■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Input Voltage	V_i	-30	V
Operating junction temperature range	T_{OPR}	-55 to +125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$

■ Electrical Characteristics ($V_i = -14\text{V}, I_o = 40\text{mA}, 0^\circ\text{C} < T_j < 125^\circ\text{C}, C_1 = 0.33 \mu\text{F}, C_o = 0.1 \mu\text{F}$, unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output voltage	V_o	$T_j = 25^\circ\text{C}$	-7.7	-8.0	-8.3	V
		$-10.5\text{V} \leq V_i \leq -23\text{V}, I_o = 1\text{mA} - 40\text{mA}$	-7.6	-8.0	-8.4	V
		$I_o = 1\text{mA} - 70\text{mA}$	-7.6	-8.0	-8.4	V
Load regulation	ΔV_o	$T_j = 25^\circ\text{C}, I_o = 1\text{mA} - 100\text{mA}$		30	100	mV
		$T_j = 25^\circ\text{C}, I_o = 1\text{mA} - 40\text{mA}$		15	50	mV
Line regulation	ΔV_o	$-10.5\text{V} \leq V_i \leq -23\text{V}, T_j = 25^\circ\text{C}$		42	200	mV
		$-11\text{V} \leq V_i \leq -23\text{V}, T_j = 25^\circ\text{C}$		36	150	mV
Quiescent current	I_q	25°C		4	6	mA
Quiescent current change	ΔI_q	$0^\circ\text{C} < T_j < 125^\circ\text{C}, -11\text{V} \leq V_i \leq -23\text{V}$			1.5	mA
	ΔI_q	$0^\circ\text{C} < T_j < 125^\circ\text{C}, 1\text{mA} \leq I_o \leq 40\text{mA}$			0.1	mA
Output noise voltage	V_N	$10\text{Hz} \leq f \leq 100\text{KHz}, T_j = 25^\circ\text{C}$		54		μV
Ripple rejection	RR	$-11\text{V} \leq V_i \leq -21\text{V}, f = 120\text{Hz}$	37	46		dB
Dropout voltage	V_d	$T_j = 25^\circ\text{C}$		1.7		V

■ Typical Application

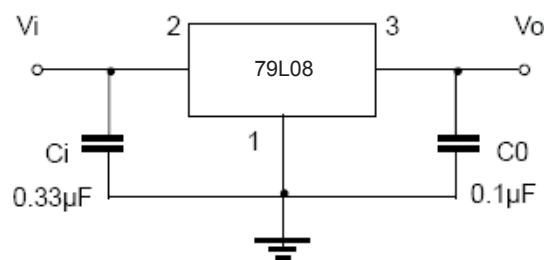

Package Outline

SOT-89

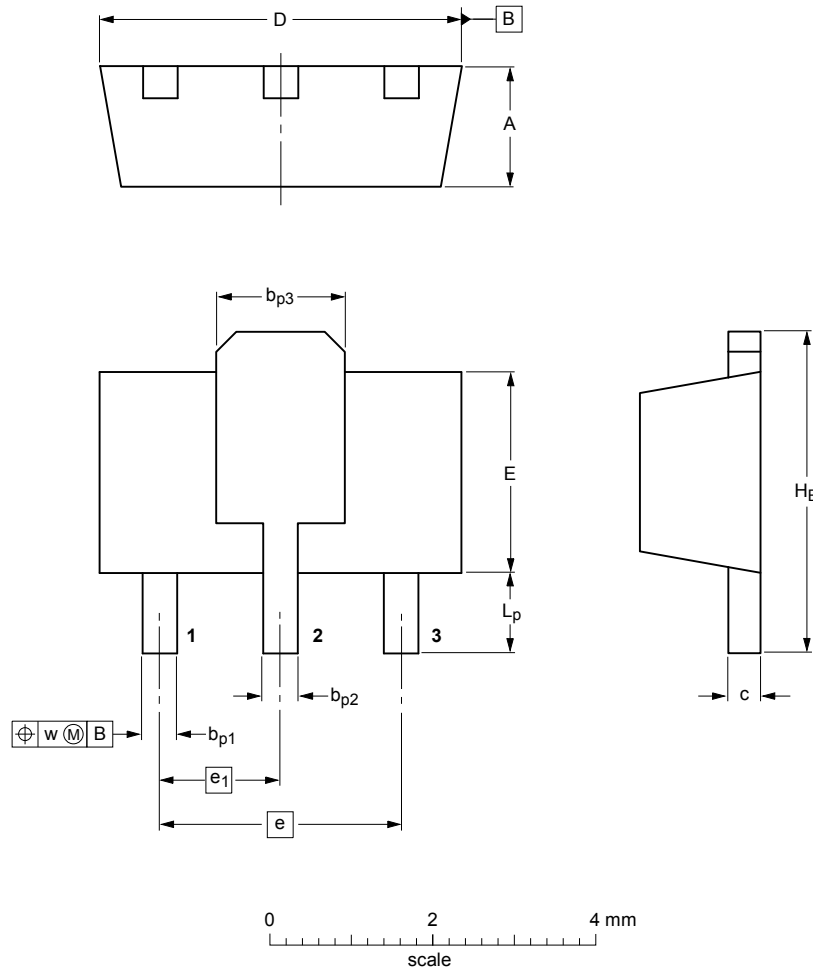

DIMENSIONS (mm are the original dimensions)

UNIT	A	b _{p1}	b _{p2}	b _{p3}	c	D	E	e	e ₁	H _E	L _p	w
mm	1.6 1.4	0.48 0.35	0.53 0.40	1.8 1.4	0.44 0.23	4.6 4.4	2.6 2.4	3.0	1.5	4.25 3.75	1.2 0.8	0.13

Summary of Packing Options

Package	Package Description	Packing Quantity	Industry Standard
SOT-89	Tape/Reel, 7" reel	1000	EIA-481-1