

RF Directional Coupler

HTW-1601-4-75MA+




75Ω 16dB Directional Coupler


5-1250MHz




Outline Drawing(mm)

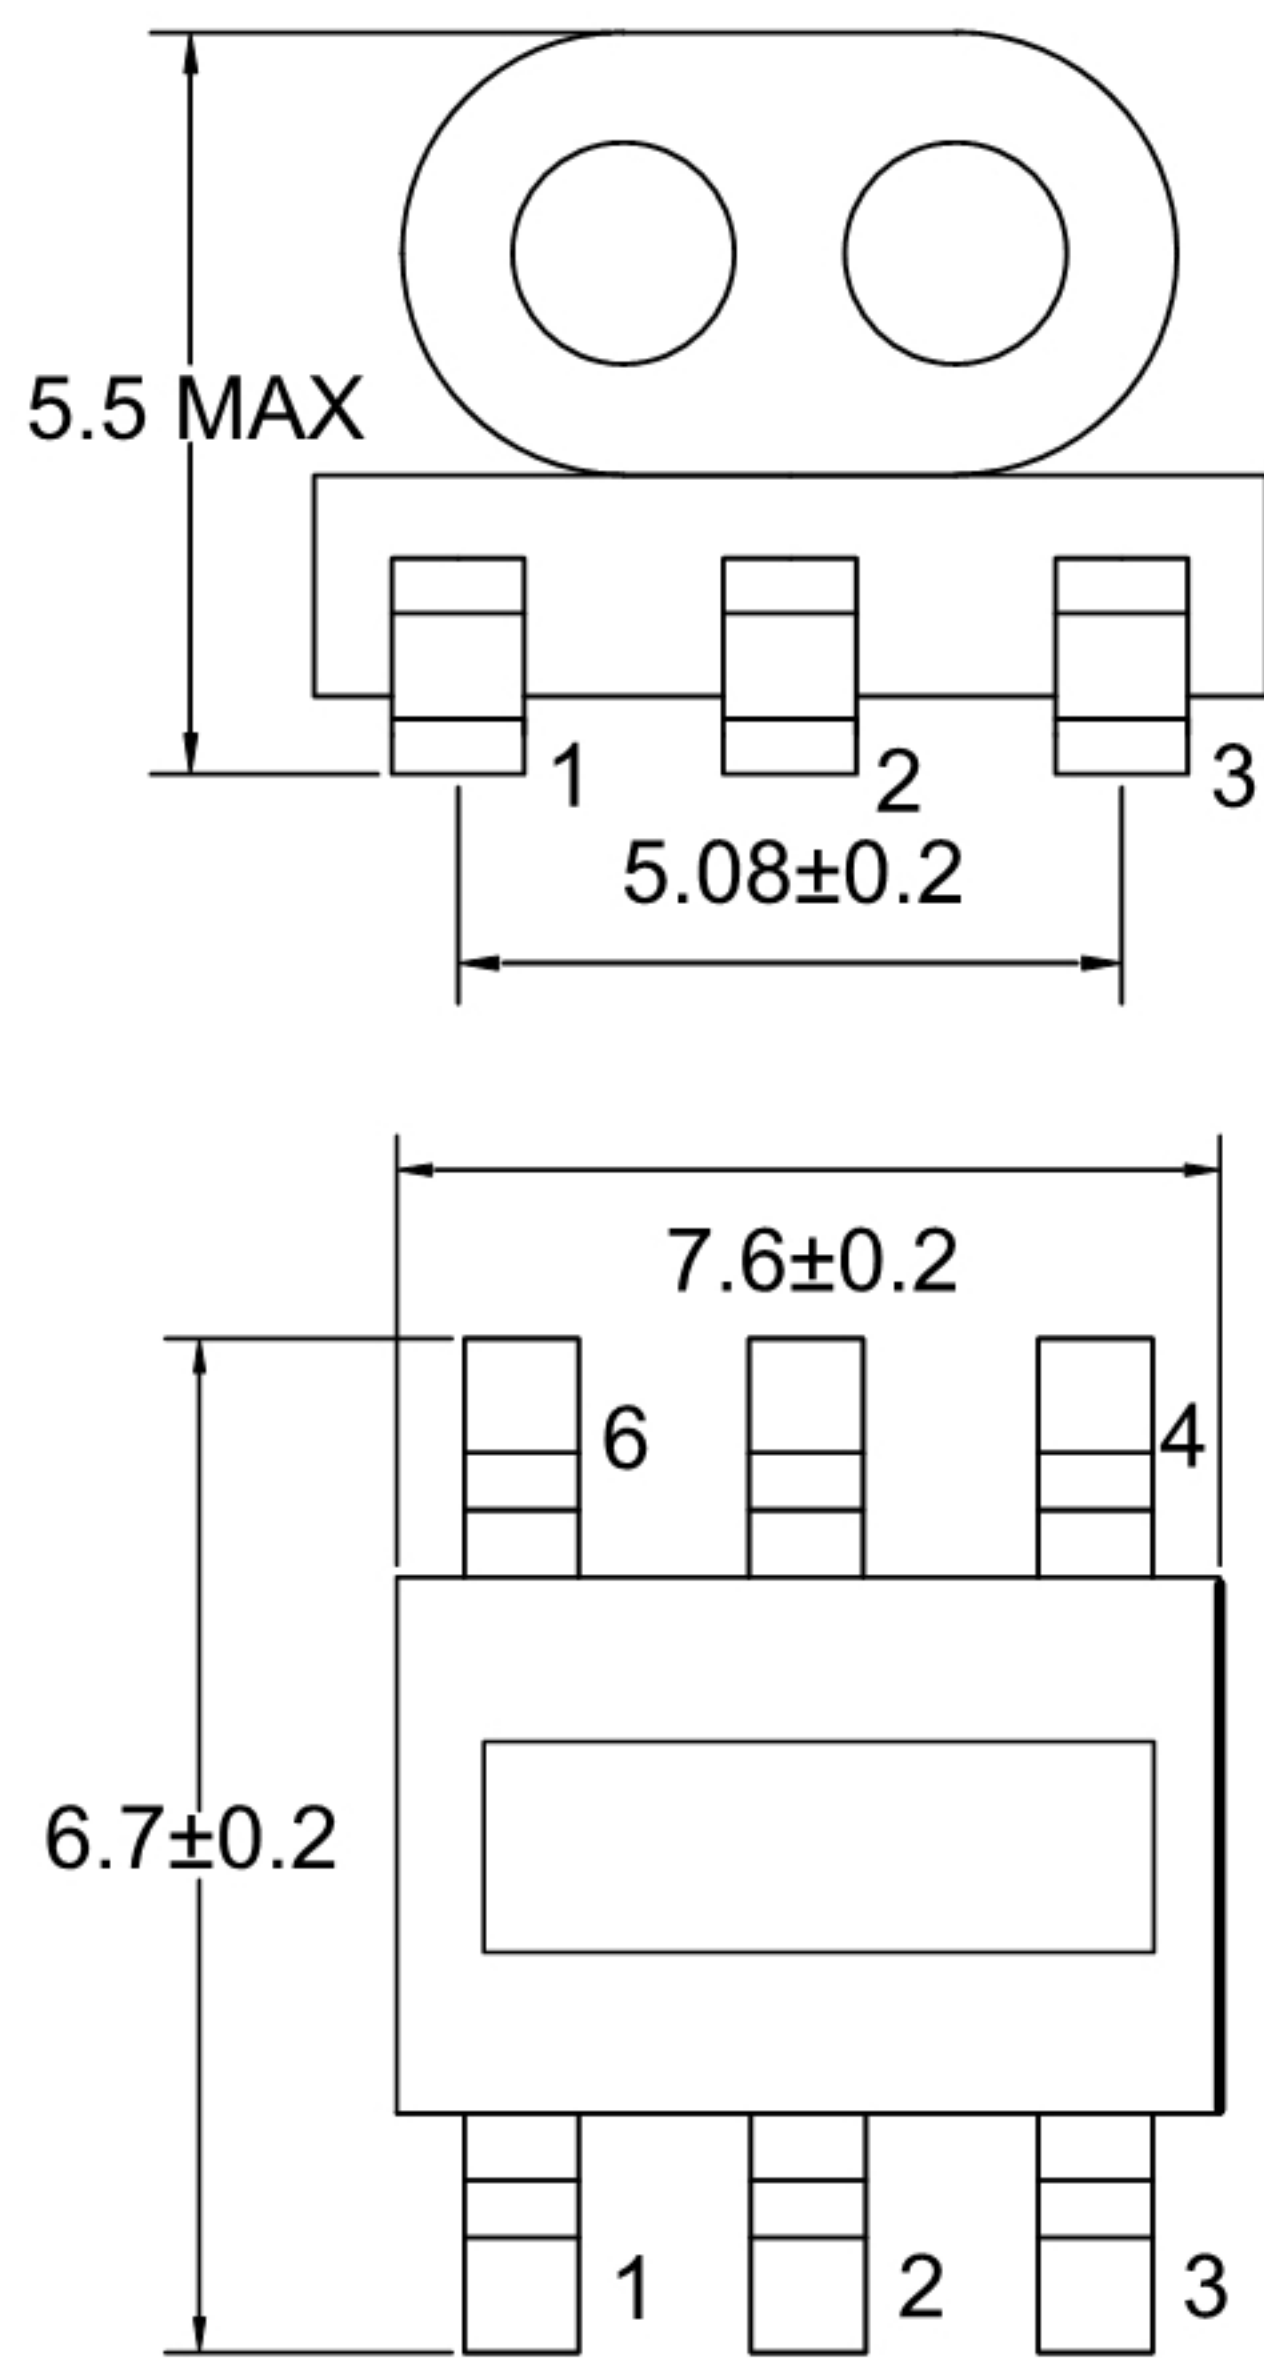

Electrical structure

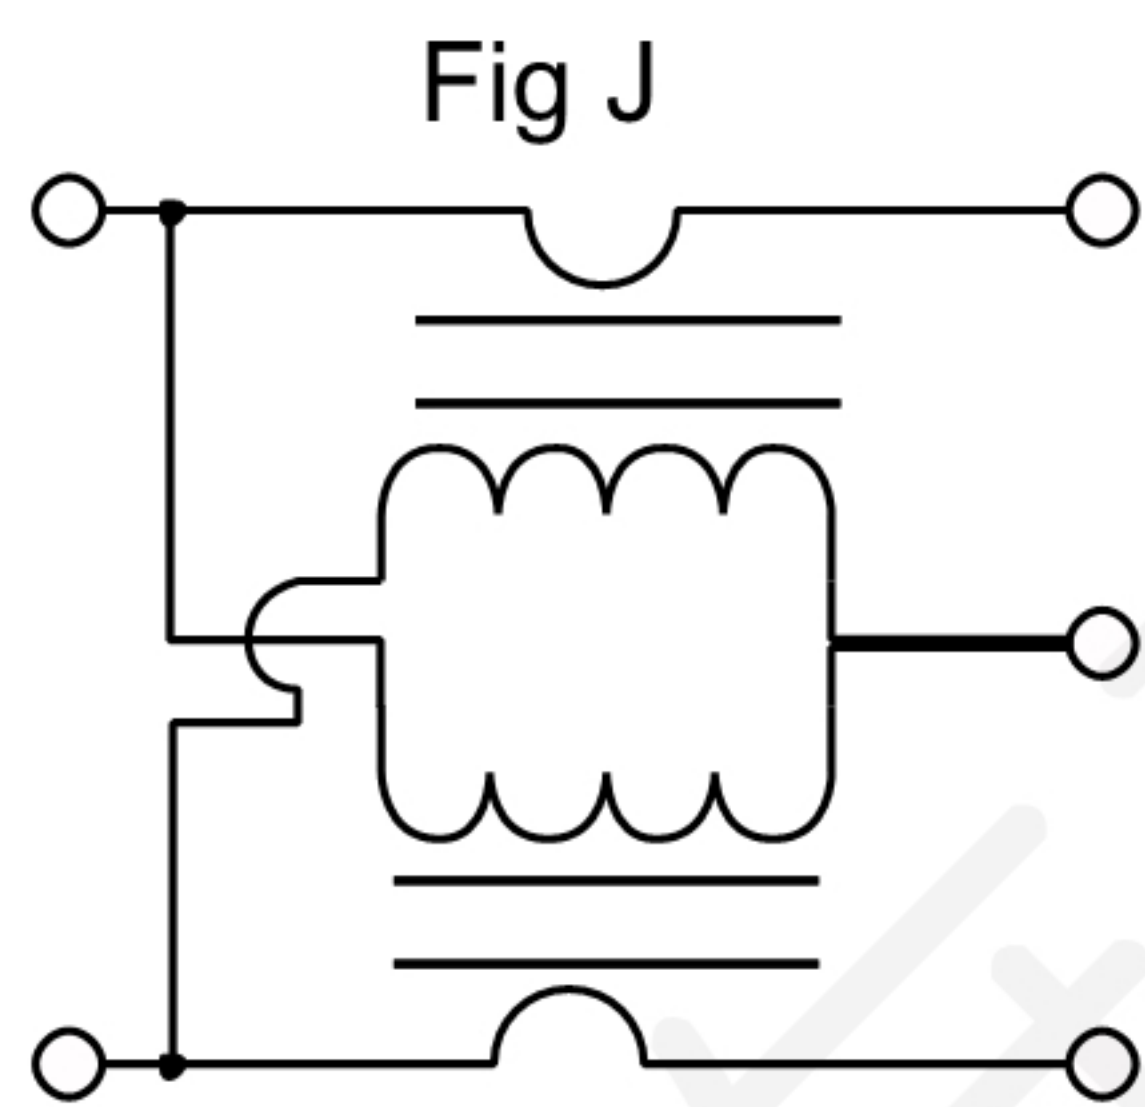

Recommended layout(mm)

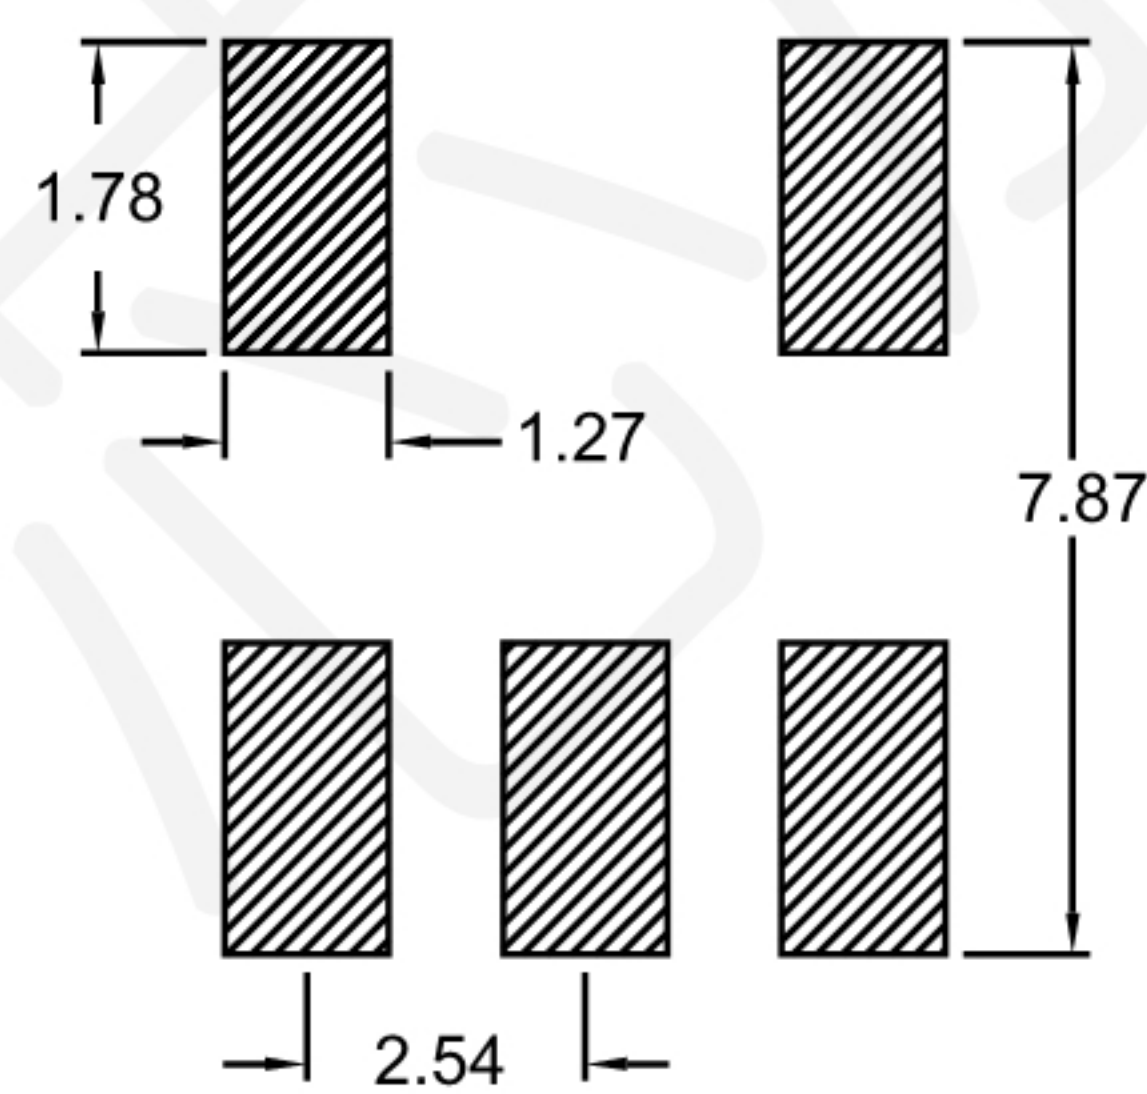

Pin Connections

Input	1
Coupling	3
Output	6
Ground	2
Isolation	4

Features



- DC Current:30 mA
- Input Power:250 mW
- 260°C Reflow Compatible
- RoHS compliant and lead free
- Operating temperature range: -40℃ to +85℃
- Storage temperature range: -55℃ to +100℃

Applications

- For Docsis 3.0 & 3.1 Cable Modem.
- For Wideband Push-pull Amplifiers.
- For CATV Amplifiers Module & Set top box.
- For CATV Optical Receivers and Amplifiers.
- For VHF/UHF Transmitters and Push-pull Amplifiers.

Electrical Specifications:TA=25℃, 0dBm, Z0=75Ω

Parameter	Test Conditions	Units	Min	Typ	Max
Coupling(pin1-3)	5-1250MHz	dB	15.0	16.0	17.0
Main line Loss(pin1-6)	5-1250MHz	dB	—	0.8	1.5
Input Return Loss(pin 1)	5-1250MHz	dB	16.0	20.0	—
Coupling Return Loss(pin3)	5-1250MHz	dB	16.0	20.0	—
Output Return Loss(pin6)	5-1250MHz	dB	16.0	20.0	—
Isolation(pin1-4)	5-1250MHz	dB	20.0	30.0	—

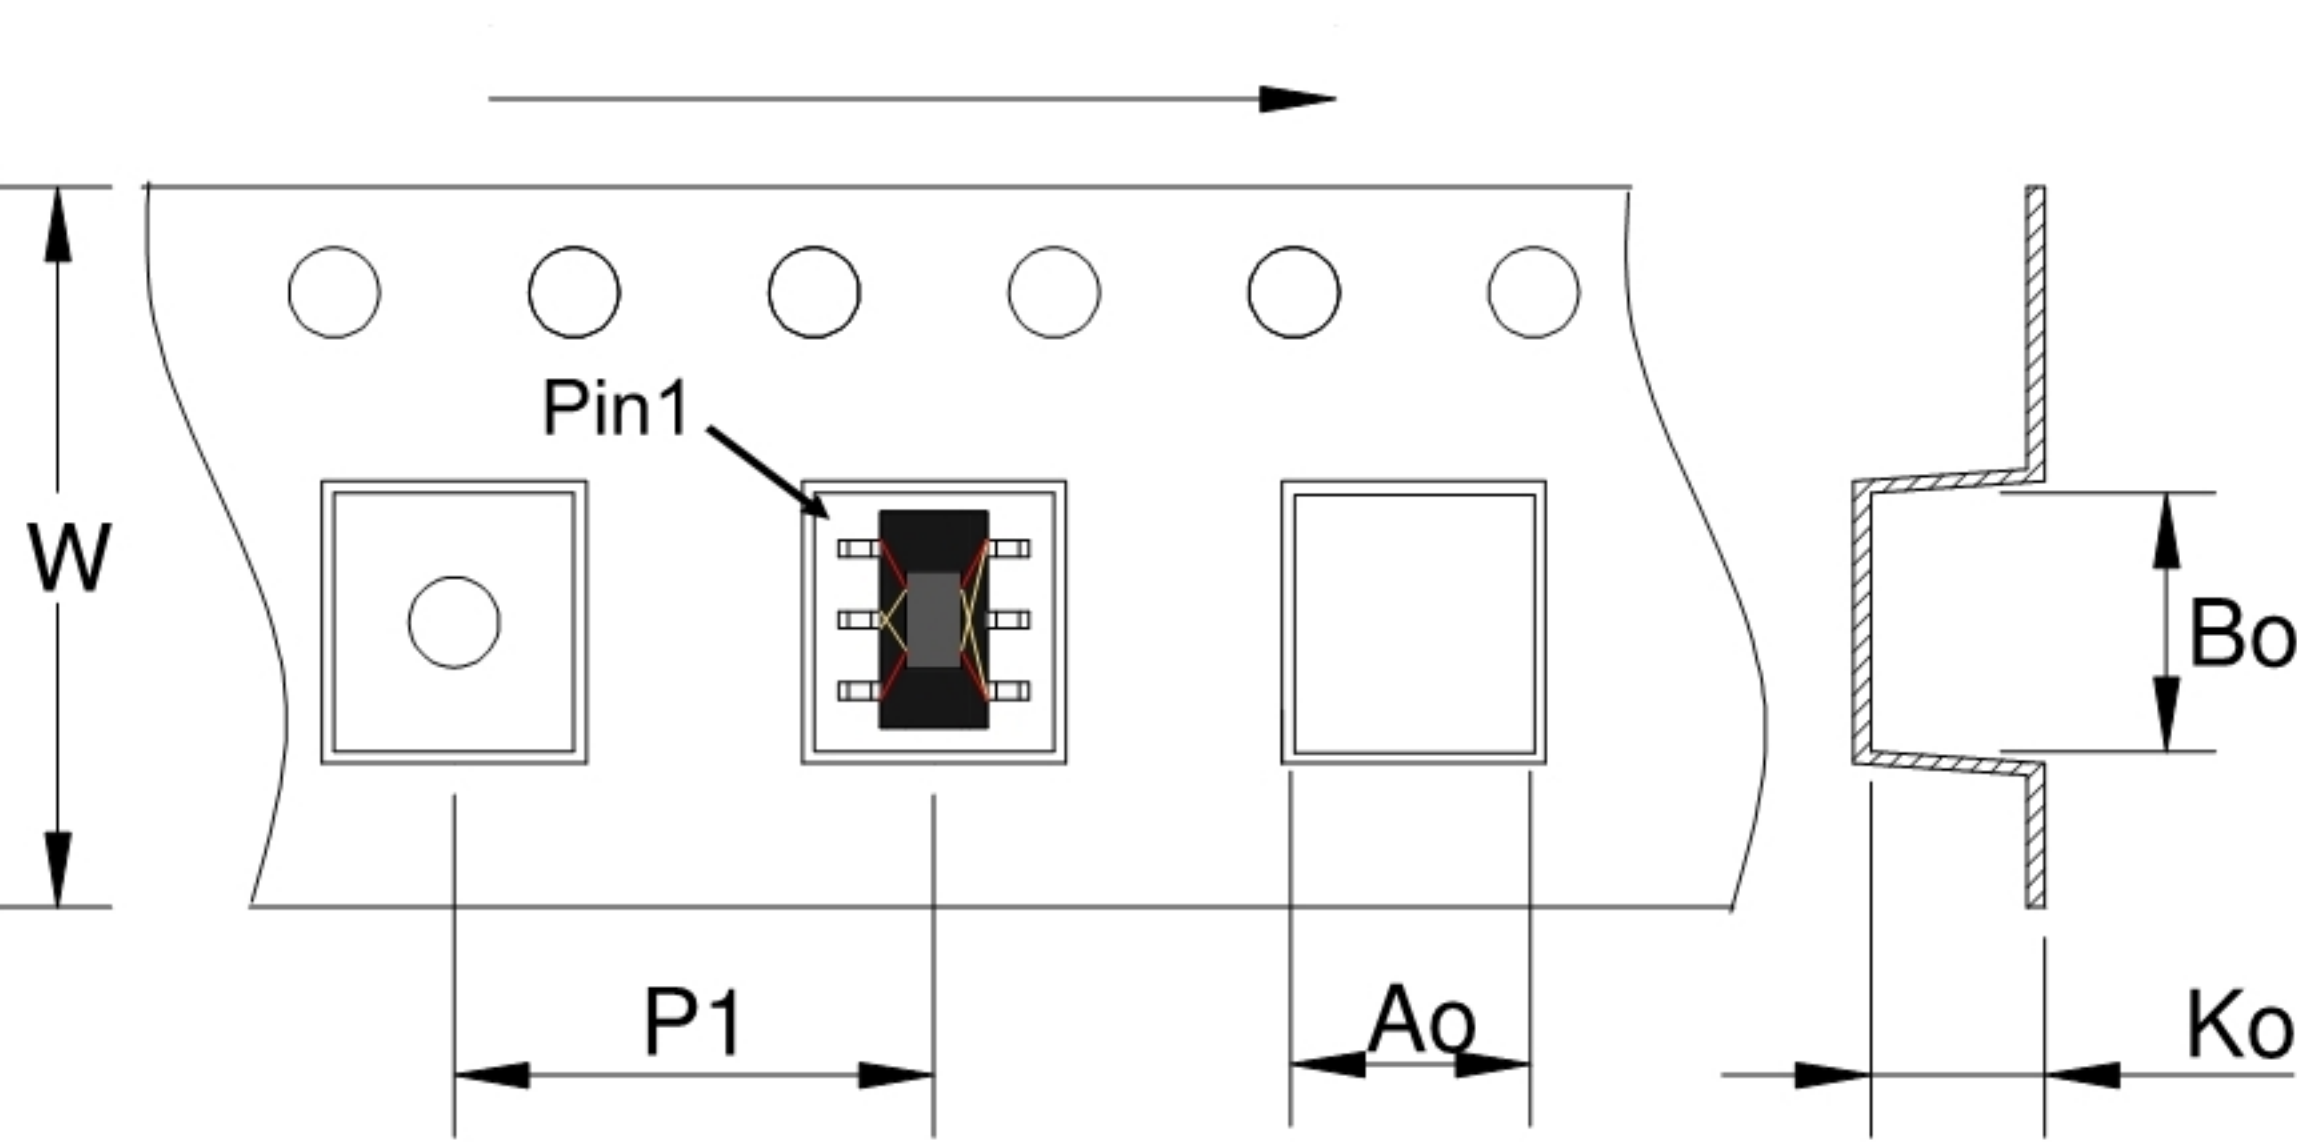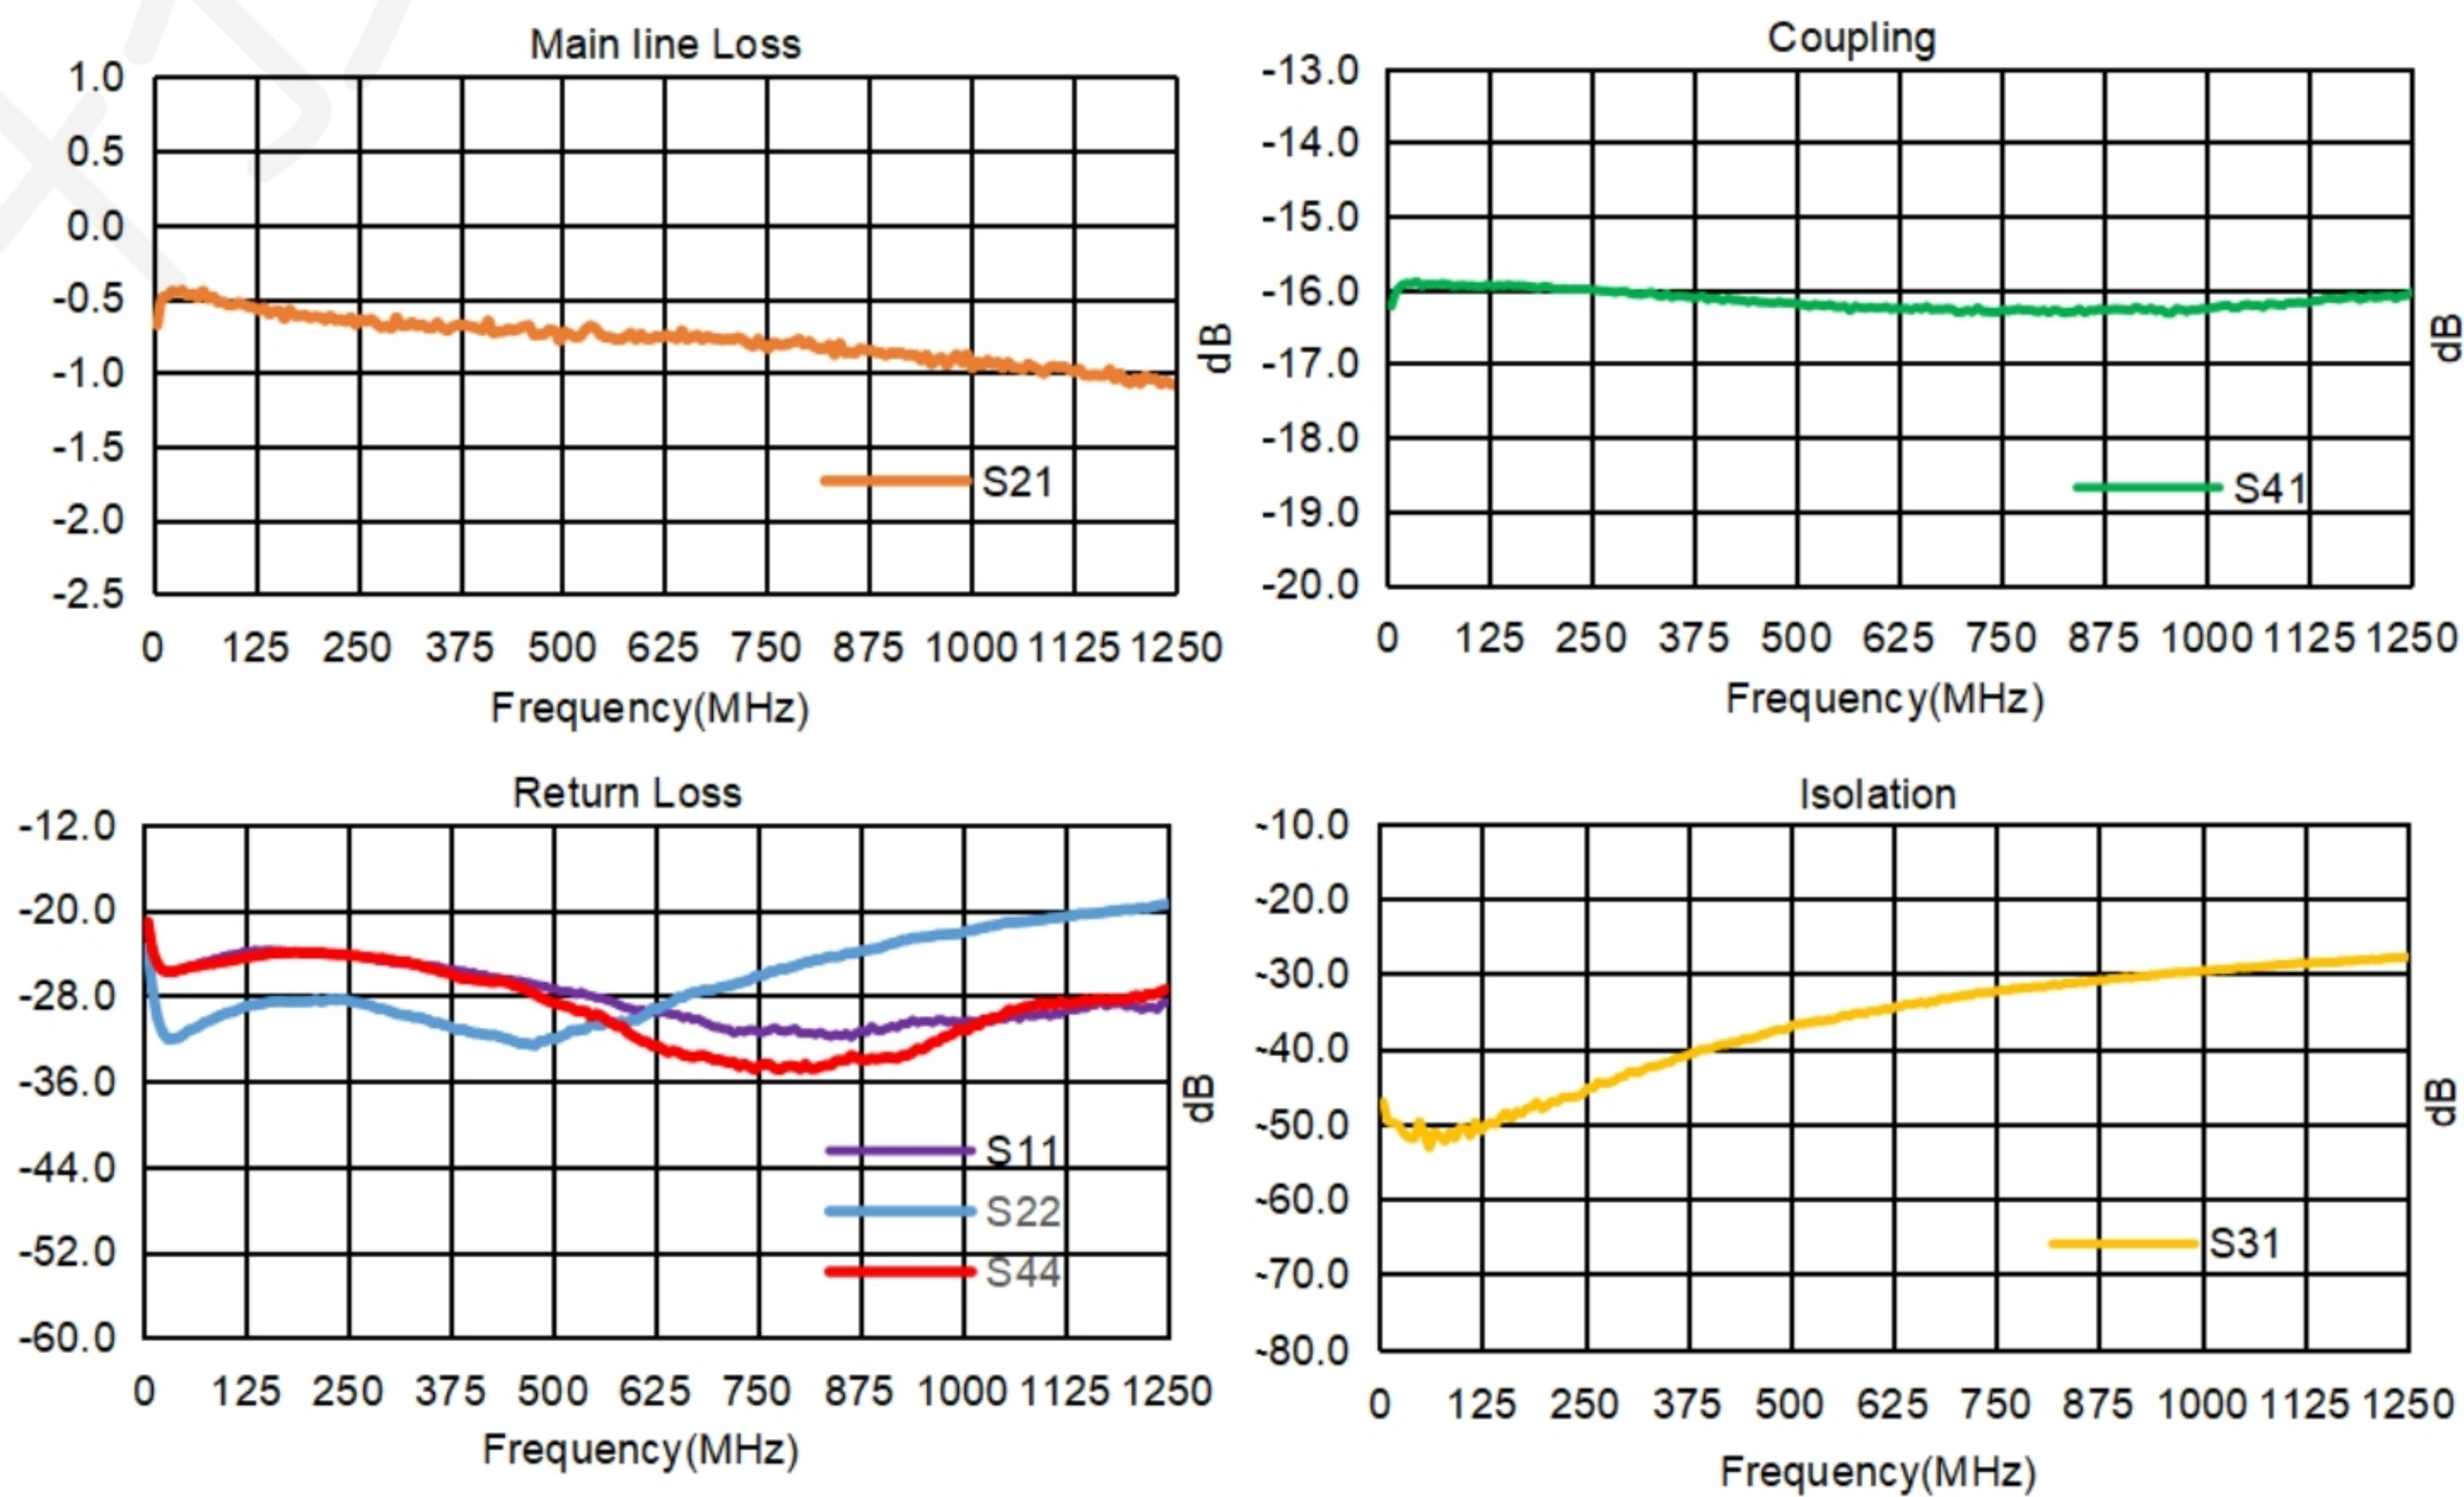

Parameter	Units	Value
Qty per reel	PCS	1000
Reel Size	mm	330
Tape Width	mm	16.00
Pitch	mm	12.00
Ao	mm	7.00
Bo	mm	8.00
Ko	mm	5.30