

HWS150A/A

SPECIFICATIONS

A259-01-01/A

| MODEL | | | HWS150A -3/A | HWS150A -5/A | HWS150A -12/A | HWS150A -15/A | HWS150A -24/A | HWS150A -48/A | |
|-------|--------------------------------|------------|-----------------|---|------------------|------------------|------------------|------------------|-------------|
| ITEMS | | | | | | | | | |
| 1 | Nominal Output Voltage | | V | 3.3 | 5 | 12 | 15 | 24 | 48 |
| 2 | Maximum Output Current | | A | 30 | 30 | 13 | 10 | 6.5 | 3.3 |
| 3 | Maximum Output Power | | W | 99.0 | 150.0 | 156.0 | 150.0 | 156.0 | 158.4 |
| 4 | Efficiency (Typ.) (*1) | 100VAC | % | 82 | 85 | 85 | 86 | 88 | 89 |
| | | 200VAC | % | 84 | 87 | 88 | 89 | 90 | 91 |
| 5 | Input Voltage Range (*2)(*3) | | - | 85 - 265VAC (47 - 63Hz) or 120 - 370VDC | | | | | |
| 6 | Input Current (Typ.) (*1) | | A | 1.3/0.65 | 1.9/0.95 | | | | |
| 7 | Inrush Current (Typ.) (*1)(*4) | | - | 14A at 100VAC, 28A at 200VAC, Ta=25°C, Cold Start | | | | | |
| 8 | PFHC | | - | Designed to meet IEC61000-3-2 | | | | | |
| 9 | Power Factor (Typ.) (*1) | | - | 0.96/0.89 | 0.98/0.93 | | | | |
| 10 | Output Voltage Range | | V | 2.97 - 3.96 | 4.0 - 6.0 | 9.6 - 14.4 | 12.0 - 18.0 | 19.2 - 28.8 | 38.4 - 52.8 |
| 11 | Maximum Ripple & Noise (*5) | 0≤Ta≤70°C | mV | 120 | 120 | 150 | 150 | 150 | 200 |
| | | -10≤Ta<0°C | mV | 160 | 160 | 180 | 180 | 180 | 240 |
| 12 | Maximum Line Regulation (*6) | | mV | 20 | 20 | 48 | 60 | 96 | 192 |
| 13 | Maximum Load Regulation (*7) | | mV | 40 | 40 | 96 | 120 | 150 | 240 |
| 14 | Temperature Coefficient | | - | Less than 0.02% / °C | | | | | |
| 15 | Over Current Protection (*8) | | A | 31.5 ≤ | 31.5 ≤ | 13.6 ≤ | 10.5 ≤ | 6.82 ≤ | 3.46 ≤ |
| 16 | Over Voltage Protection (*9) | | V | 4.13 - 4.95 | 6.25 - 7.25 | 15.0 - 17.4 | 18.8 - 21.8 | 30.0 - 34.8 | 55.2 - 64.8 |
| 17 | Hold-up Time (Typ.) (*1) | | - | 20ms | | | | | |
| 18 | Leakage Current (*10) | | - | Less than 0.5mA. 0.2mA (Typ) at 100VAC / 0.4mA (Typ) at 230VAC | | | | | |
| 19 | Remote Sensing | | - | Possible | | | | | |
| 20 | Parallel Operation | | - | - | | | | | |
| 21 | Series Operation | | - | Possible | | | | | |
| 22 | Operating Temperature (*11) | | - | -10 to +70°C (-10 to +50°C:100%, +60°C:60%, +70°C:20%) | | | | | |
| 23 | Operating Humidity | | - | 30 to 90%RH (No Condensing) | | | | | |
| 24 | Storage Temperature | | - | -30 to +85°C | | | | | |
| 25 | Storage Humidity | | - | 10 to 95%RH (No Condensing) | | | | | |
| 26 | Cooling | | - | Convection Cooling | | | | | |
| 27 | Withstand Voltage | | - | Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (20mA) for 1min | | | | | |
| 28 | Isolation Resistance | | - | More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC | | | | | |
| 29 | Vibration | | - | At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each. | | | | | |
| 30 | Shock | | - | Less than 196.1m/s ² | | | | | |
| 31 | Safety | | - | Approved by UL60950-1, CSA60950-1, EN60950-1, UL508, CSA C22.2 No.107.1-01. Designed to meet Den-an Appendix 8 at 100VAC only. | | | | | |
| 32 | Line DIP | | | Designed to meet SEMI-F47 (200VAC Line only) | | | | | |
| 33 | Conducted Emission (*12) | | - | Designed to meet EN55011/EN55022-B, FCC-B, VCCI-B | | | | | |
| 34 | Radiated Emission (*12) | | - | Designed to meet EN55011/EN55022-B, FCC-B, VCCI-B | | | | | |
| 35 | Immunity (*12) | | - | Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11 | | | | | |
| 36 | Weight (Typ) | | - | 520g | | | | | |
| 37 | Size (W x H x D) | | mm | 42 x 82 x 160 (Refer to Outline Drawing) | | | | | |

*Read instruction manual carefully, before using the power supply unit.

=NOTES=

*1. At 100VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.

*2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50 - 60Hz).

*3. Output derating needed when input voltage less than 90VAC. Refer to OUTPUT DERATING CURVE (A259-01-02/A-).

*4. Not applicable for the inrush current to Noise Filter for less than 0.2ms.

*5. Measure with JEITA RC-9131B probe, Bandwidth of scope :100MHz.

*6. 85 - 265VAC, constant load.

*7. No load-Full load, constant input voltage.

*8. Constant current limit and Hiccup with automatic recovery.
Avoid to operate at over load or short circuit condition.

*9. OVP circuit will shut down output, manual reset (Re power on).

*10. Measured by the each measuring method of UL, CSA, EN and Den-an (at 60Hz), Ta=25°C.

*11. Output Derating

- Derating at standard mounting. Refer to OUTPUT DERATING CURVE (A259-01-02/A-).

- Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.

*12. The power supply is considered a component which will be installed into a final equipment.

The final equipment should be re-evaluated that it meets EMC directives.


HWS150A/A

OUTPUT DERATING

A259-01-02/A

| Ta (°C) | LOAD (%) | |
|-----------|------------|------------------|
| | MOUNTING A | MOUNTING B, C, D |
| -10 - +30 | 100 | 100 |
| 50 | 100 | 60 |
| 60 | 60 | 35 |
| 70 | 20 | 10 |

*Refer to dotted line for output derating curve, when input voltage range is " $85 \leq V_{in} < 90$ " for the MOUNTING A.

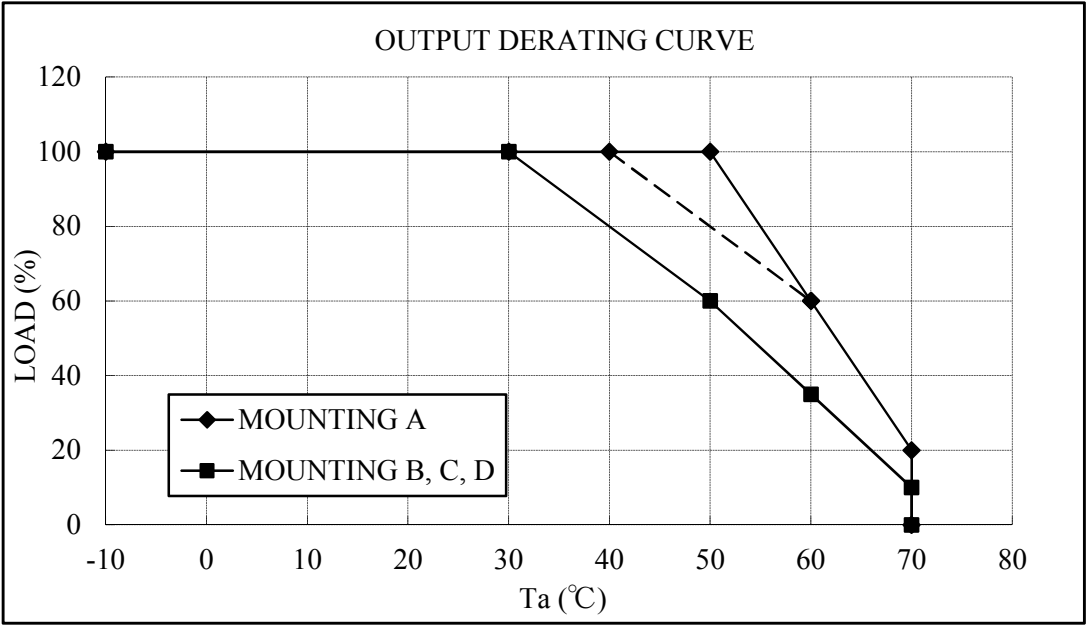

MOUNTING A
(STANDARD MOUNTING)

MOUNTING B

MOUNTING C

MOUNTING D

DON'T USE

