

125A

H12WD48125

H1 SERIES | H12WD

PANEL MOUNT



Features

- Ratings from 25A to 125A @ 48-660 VAC
- Low off-state leakage current (snubberless)
- SCR output for heavy industrial loads
- Zero Voltage or instantaneous turn-on outputs
- UL/CSA/VDE Approved, CE Compliant to EN60950-1

90A

H12WD4890

- Improved SEMS screw and washer
- Redesigned housing with anti-rotation barriers
- DC control

50A

H12WD4850

- Direct bond copper substrate
- EMC Compliant to Level 3
- Direct power lead frame
- Epoxy free design

For Generation 3 datasheet click here

75A

H12WD4875

PRODUCT SELECTION

25A

H12WD4825

Control Voltage

4-32 VDC

H1 - <u>2WD</u> - 48 -	<u>25</u> – K – P	- G - [H – -10
Serires ————————————————————————————————————			
H1			
ransient Overvoltage			
2WD : 1200 Vpk			
Operating Voltage			
48: 48-660 VAC			
	_		
25 : 25 Amps 90 : 90 Amps 50 : 50 Amps 125 : 125 Amps 75 : 75 Amps			
ermination			
Blank: Screw F: Quick Connect (Up to 50 Amps only) (1) K: Hex standoffs (2)			
vervoltage Protection ————————————————————————————————————			
Blank: Not Included P: Included (3)			
nput Status LED ———————————————————————————————————			
Blank: Not Included G: Included			
hermal Pad ———————————————————————————————————			_
Blank: Not Included H: Included			

Page 1

Description	25A	50A	75A	90A	125A
Operating Voltage (47-440Hz) [Vrms]	48-660	48-660	48-660	48-660	48-660
Transient Overvoltage [Vpk]	1200	1200	1200	1200	1200
Maximum Off-State Leakage Current @ Rated Voltage [mArms]	1.0	1.0	1.0	1.0	1.0
Minimum Off-State dv/dt @ Maximum Rated Voltage [V/µsec]	500	500	500	500	500
Maximum Load Current [Arms] (6)(3)	25	50	75	90	125
Minimum Load Current [mArms]	150	150	150	150	150
Maximum 1 Cycle Surge Current (50/60Hz) [Apk]	239/250	597/625	954/1000	1145/1200	1670/1750
Maximum On-State Voltage Drop @ Rated Current [Vrms]	1.15	1.15	1.15	1.15	1.15
Thermal Resistance Junction to Case (Rjc) [°C/W]	0.8	0.45	0.3	0.27	0.22
Maximum 1/2 Cycle I ² t for Fusing (50/60Hz) [A ² sec]	285/259	1779/1621	4555/4150	6560/5976	13950/12709
Minimum Power Factor (at Maximum Load) (7)	0.5	0.5	0.5	0.5	0.5


INPUT SPECIFICATIONS (5)

Description	DC Control	
Control Voltage Range	4-32 VDC	
Minimum Turn-On Voltage (7)	4.0 VDC	
Must Turn-Off Voltage	1.0 VDC	
Maximum Reverse voltage	-32 VDC	
Minimum Input Current	7 mADC	
Maximum Input Current	12 mADC	
Nominal Input Impedance	Current Regulated	
Maximum Turn-On Time [msec] (8)	1/2 Cycle	
Maximum Turn-Off Time [msec]	1/2 Cycle	


GENERAL SPECIFICATIONS (5)

Description	Parameters	
Dielectric Strength, Input/Output/Base (50/60Hz)	4000 Vrms	
Minimum Insulation Resistance (@ 500 V DC)	10° Ohm	
Maximum Capacitance, Input/Output	8 pF	
Ambient Operating Temperature Range	-40 to 80 °C	
Ambient Storage Temperature Range	-40 to 125 °C	
Weight (typical)	2.6 oz (74.9 g)	
Housing Material	94 V-0	
Baseplate Material	Aluminum	
Input Terminal Screw Torque Range (in-lb/Nm)	13-15 /1.5-1.7	
Load Terminal Screw Torque Range (in-lb/Nm)	18-20 / 2.0-2.2	
SSR Mounting Screw Torque Range (in-lb/Nm)	18-20 / 2.0-2.2	
Input/Load Terminal Screw Torque Range (in-lb/Nm) (3)	w/"K" option 8-10 / 0.9-1.13	
Input/Output Terminal Screw Thread Size	#6-32 UNC / #8-32 UNC	
Humidity per IEC60068-2-78	93% non-condensing	
LED Input Status Indicator	w/"G" option (green)	
MTBF (Mean Time Between Failures) at 40°C ambient temperature (9)	11,641,553 hours (1,328 years)	
MTBF (Mean Time Between Failures) at 60°C ambient temperature (9)	7,210,376 hours (823 years)	


WIRING DIAGRAM



Recommended Wire Sizes				
Terminals Wire Size (Solid / Stranded)		Wire Pull-Out Strength (lb)[N]		
lanu.	24 AWG (0.2 mm²) / 0.2 [minimum]	10 [44.5]		
Input	2 x 12 AWG (3.3 mm²) / 3.3 [maximum]	90 [400]		
	20 AWG (0.5 mm²) / 0.518 [minimum]	30 [133]		
Output	2 x 10 AWG (5.3 mm ²) / 5.3	110 [490]		
	2 x 8 AWG (8.4 mm ²) / 8.4 [maximum]	90 [400]		




Page 2




MECHANICAL SPECIFICATIONS (5)

 $\label{eq:total_control_control_control} Tolerances: \pm 0.02 \ in \ / \ 0.5 \ mm \\ All \ dimensions \ are \ in: inches \ [millimeters]$


Screw Termination

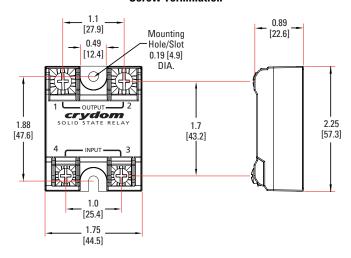


Hex Standoff Termination ("K" Option) (3)




Quick Connect Termination ("F" Option) - Up to 25 Amp (2)

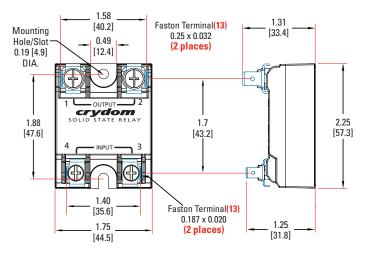


Quick Connect Termination ("F" Option) - Up to 50 Amp (2)

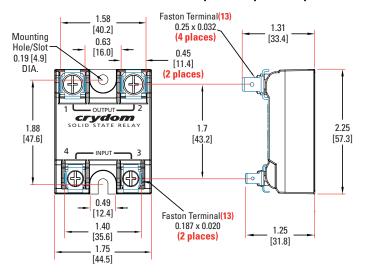

shunto@126.com

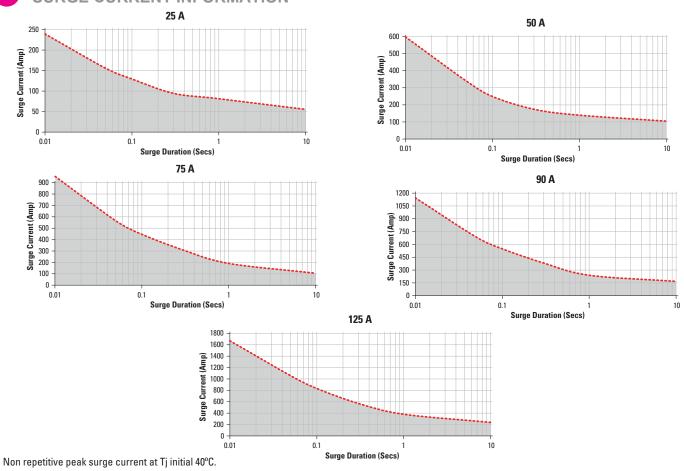

THERMAL DERATE INFORMATION

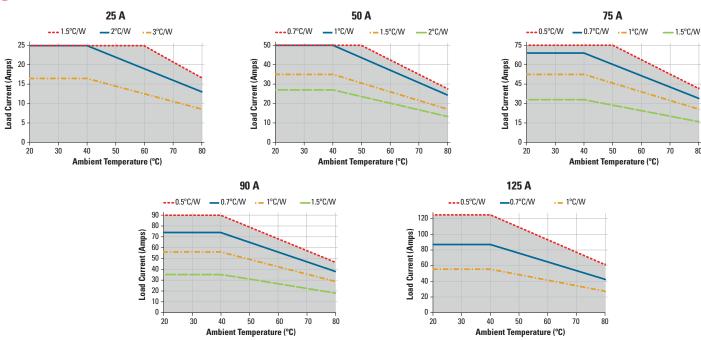


Designed in accordance with the requirements of IEC 62314

IEC 61000-4-2 : Electrostatic Discharge – Level 3 IEC 61000-4-4: Electrically Fast Transients – Level 3

IEC 61000-4-5: Electrical Surges – Level 3

IEC 600068-2-6: Vibration 0.33mm and 0.75mm Amplitude over 10-55 Hz

IEC 600068-2-27: Shock Resistance 15q/11ms













Protective Cover & Hardware Kits

Protective Cover

Part number: KS101



Clear plastic cover compatible with all new S1 designs. Safety covers provide added protection from electric shock when installing or checking equipment.

Hardware Kit Part number: HK4

Bag with 2 square brass accessories and 2 screw 8-32 x 5/8 for output. Used to mount TMR1 lug terminals.

Recommended Accessories						


Cover	Hardware Kit	Heat Sink Part No.	Thermal Resistance [°C/W]	Lug Terminal	Thermal Pad	
KS101	HK1	HS501DR	5.0	TRM1	HSP-1	
	HK4	HS301 / HS301DR	3.0	TRM6	HSP-2	
		HS251	2.5			
		HS202 / HS202DR	2.0			
		HS201 / HS201DR	2.0			
		HS172	1.7			
		HS151 / HS151DR	1.5			
		HS122 / HS122DR	1.2			
		HS103 / HS103DR	1.0			
		HS101	1.0			
		HS073	0.7			
		HS072	0.7			
		HS053	0.5			
		HS033	0.36			
		HS023	0.25			

GENERAL NOTES

- (1) Single pair (up to 25A) Double pair* (50A model only). *Caution: User must connect to both pairs
- (2) Option "K" is designed and tested for use with printed circuit boards or ring/fork terminals having a thickness between 0.031 and 0.093 inches (0.79 to 2.36 mm), and loads rated up to 50 Amps. For higher load currents, the "K" standoff temperature must not exceed 105°C. For additional application assistance please contact Crydom Technical Support.
- (3) Output will self trigger between 900-1200Vpk, Min. power factor 0.7 or higher, not suitable for capacitive loads.
- (4) Instantaneous turn-on version is not recomended for capacitive loads. Use zero turn-on only.
- (5) All parameters at 25°C unless otherwise specified.
- (6) Heat sinking required, see derating curves.
- (7) Increase minimum voltage by 1V for operations from -20 to -40°C.
- (8) Turn-on time for Instantaneous turn-on versions is 0.02 msec.
- (9) All parameters at 50% power rating and 100% duty cycle (contact Crydom tech support for detailed report).
- (10) Load can be wired to either SSR output terminal 1 or 2.
- (11) Elective Input Status LED, "G" option.
- (12) Elective Overvoltage Protection, "P" option.
- (13) Mechanical dimensions vary from G3 models.

For additional information or specific questions, contact Crydom Technical Support.







RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE

- The product's side panels may be hot, allow the product to cool
- Follow proper mounting instructions including torque values
- Do not allow liquids or foreign objects to enter this product

Failure to follow these instructions can result in serious injury, or equipment damage.



HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power before installing or working with this
- Verify all connections and replace all covers before turning on

Failure to follow these instructions will result in death or serious injury

Page 6

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

+1 (877) 502 5500 - Option 2 sales.crydom@sensata.com Europe, Middle East & Africa

+44 (1202) 416170

ssr-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com China +86 (21) 2306 1500 Japan +81 (45) 277 7117 Korea +82 (31) 601 2004 India +91 (80) 67920890 Rest of Asia +886 (2) 27602006 ext 2808