■ PNP Silicon Epitaxial Transistor



1.Base
2.Emitter
3.Collector

■ **Simplified outline(SOT-523)**

■ Features

- Ideally suited for automatic insertion
- For Switching and AF Amplifier Applications

■ Absolute Maximum Ratings Ta = 25℃

Parameter		Symbol	Value	Unit
Collector Base Voltage	BC856T BC857T, BC860T BC858T, BC859T	$-V_{CBO}$	80 50 30	V
Collector Emitter Voltage	BC856T BC857T, BC860T BC858T, BC859T	$-V_{CEO}$	65 45 30	V
Emitter Base Voltage		$-V_{EBO}$	5	V
Collector Current		$-I_C$	100	mA
Peak Collector Current		$-I_{CM}$	200	mA
Power Dissipation		P_{tot}	150	mW
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	- 65 to + 150	°C

■ Electrical Characteristics Ta = 25℃

Parameter			Symbol	Min.	Max.	Unit
DC Current Gain at $-V_{CE}$ = 5 V, $-I_C$ = 2 mA	Current Gain Group	A B C	h_{FE} h_{FE} h_{FE}	125 220 420	250 475 800	- - -
Collector Base Cutoff Current at $-V_{CB}$ = 30 V			$-I_{CBO}$	-	15	nA
Collector Base Breakdown Voltage at $-I_C$ = 10 µA	BC856T BC857T, BC860T BC858T, BC859T		$-V_{(BR)CBO}$ $-V_{(BR)CBO}$ $-V_{(BR)CBO}$	80 50 30	- - -	V
Collector Emitter Breakdown Voltage at $-I_C$ = 10 µA	BC856T BC857T, BC860T BC858T, BC859T		$-V_{(BR)CES}$ $-V_{(BR)CES}$ $-V_{(BR)CES}$	80 50 30	- - -	V
Collector Emitter Breakdown Voltage at $-I_C$ = 10 mA	BC856T BC857T, BC860T BC858T, BC859T		$-V_{(BR)CEO}$ $-V_{(BR)CEO}$ $-V_{(BR)CEO}$	65 45 30	- - -	V
Emitter Base Breakdown Voltage at $-I_E$ = 1 µA			$-V_{(BR)EBO}$	5	-	V
Collector Emitter Saturation Voltage at $-I_C$ = 10 mA, $-I_B$ = 0.5 mA at $-I_C$ = 100 mA, $-I_B$ = 5 mA			$-V_{CE(sat)}$ $-V_{CE(sat)}$	- -	0.3 0.65	V
Base Emitter On Voltage at $-I_C$ = 2 mA, $-V_{CE}$ = 5 V at $-I_C$ = 10 mA, $-V_{CE}$ = 5 V			$-V_{BE(on)}$ $-V_{BE(on)}$	0.6 -	0.75 0.82	V
Current Gain Bandwidth Product at $-V_{CE}$ = 5 V, $-I_C$ = 10 mA, f = 100 MHz			f_T	100	-	MHz
Collector Output Capacitance at $-V_{CB}$ = 10 V, f = 1 MHz			C_{ob}	-	6	pF

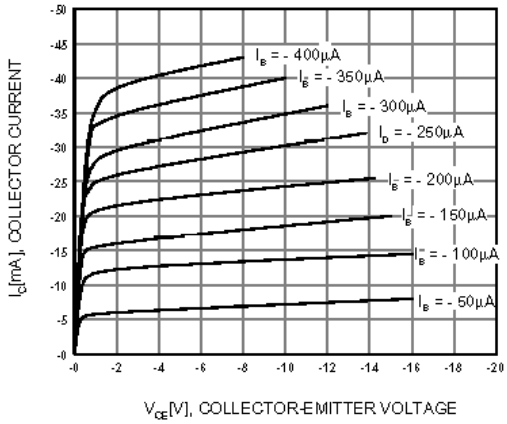

Figure 1. Static Characteristic

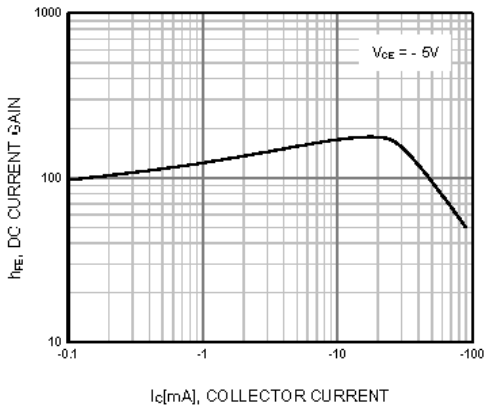

Figure 2. DC current Gain

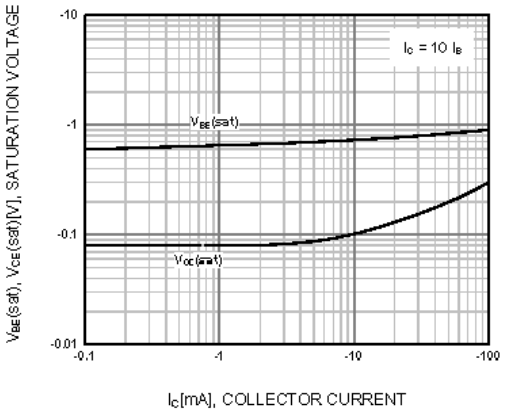

Figure 3. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

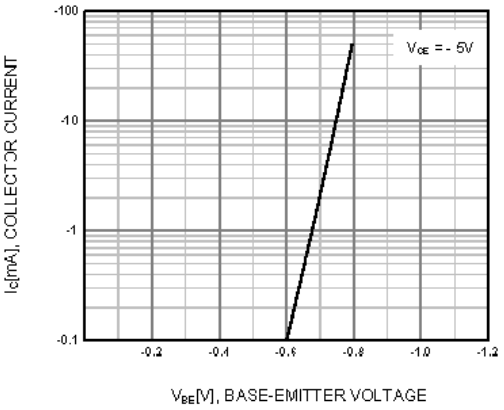

Figure 4. Base-Emitter On Voltage

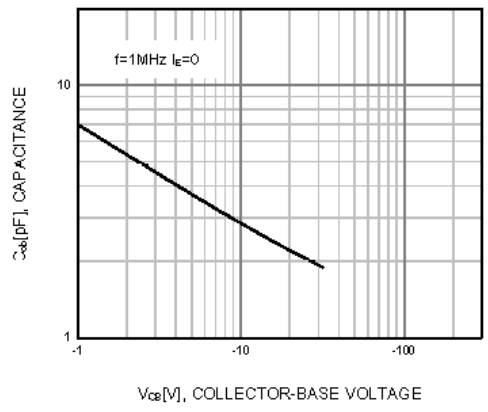

Figure 5. Collector Output Capacitance

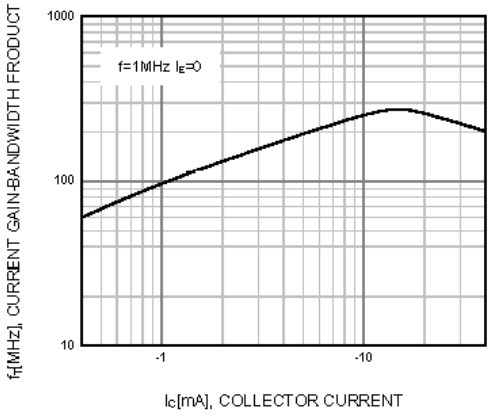

Figure 6. Current Gain Bandwidth Product

Package Outline SOT-523

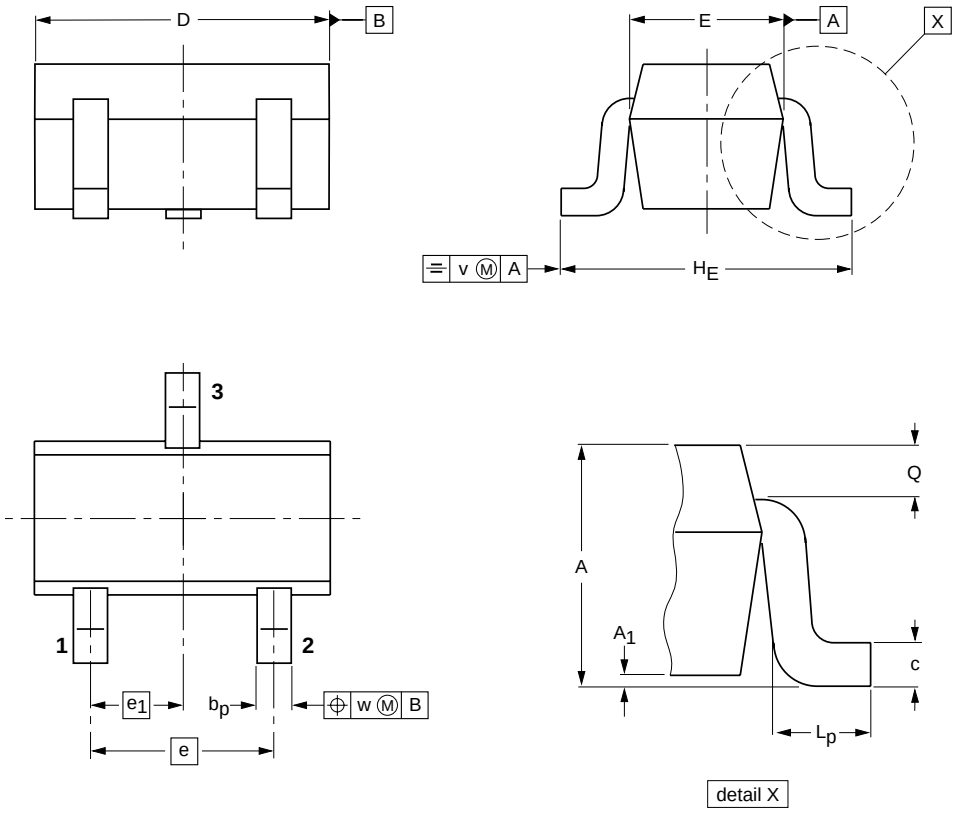

DIMENSIONS (mm are the original dimensions)

UNIT	A	A_1 max	b_p	c	D	E	e	e_1	H_E	L_p	Q	v	w
mm	0.95 0.60	0.1	0.30 0.15	0.25 0.10	1.8 1.4	0.9 0.7	1	0.5	1.75 1.45	0.45 0.15	0.23 0.13	0.2	0.2

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
SOT-523	Tape/Reel,7"reel	3000	EIA-481-1