

# Surface Mount Directional Coupler

## ADC-20-4+

50Ω 5 to 1000 MHz

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2
50Ω TERM EXTERNAL	4
ISOLATE (DO NOT USE)	5

### Outline Drawing

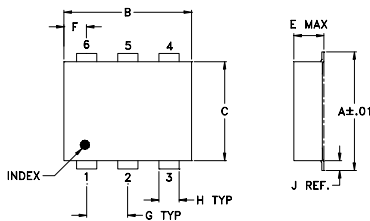

### PCB Land Pattern



Suggested Layout,  
Tolerance to be within ±.002


### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

### Demo Board MCL P/N: TB-05 Suggested PCB Layout (PL-095)

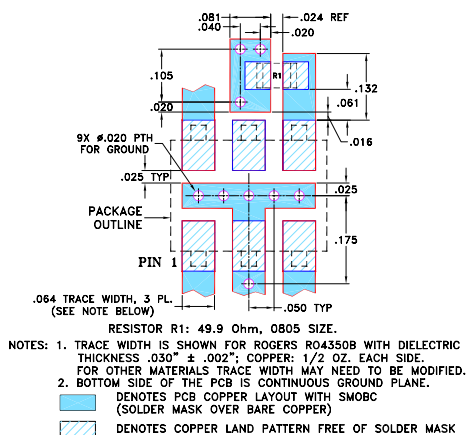

### Features

- wideband, 5-1000 MHz
- low mainline loss, 0.5 dB typ.
- high directivity, 21 dB typ.
- aqueous washable
- protected by U.S. Patents 6,133,525 & 6,140,887

### Applications

- cable tv
- communications



CASE STYLE: CD542

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000




### Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS <sup>1</sup> (dB)			DIRECTIVITY (dB)			VSWR (:1)	POWER INPUT, W							
	Nom.	Flatness	L Typ.	M Typ.	U Typ.	L Typ.	M Typ.	U Typ.		Typ.	L Max.	MU Max.					
f <sub>L</sub> -f <sub>U</sub>																	
5-1000	20.0±0.5	±0.8	0.4	0.8	0.5	1.0	0.7	1.3	20	18	21	17	21	15	1.1	1.0	1.0


L= 5-50 MHz M= 50-500 MHz U= 500-1000 MHz  
1. Mainline loss includes theoretical power loss at coupled port.

### Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
5.00	0.41	19.60	20.25	26.42	27.32	22.39
10.00	0.37	19.61	19.75	29.58	31.08	25.96
50.00	0.36	19.67	20.03	32.86	36.64	31.40
100.00	0.37	19.69	20.19	31.12	34.33	29.86
200.00	0.41	19.77	20.38	27.29	29.92	25.70
500.00	0.52	19.94	20.50	21.37	23.07	19.21
600.00	0.56	19.91	20.51	20.13	21.56	17.75
700.00	0.60	19.90	20.14	18.93	20.38	16.62
800.00	0.65	19.90	19.28	17.86	19.26	15.63
900.00	0.70	19.86	18.29	16.81	18.23	14.77
1000.00	0.76	19.84	17.38	15.80	17.18	13.97

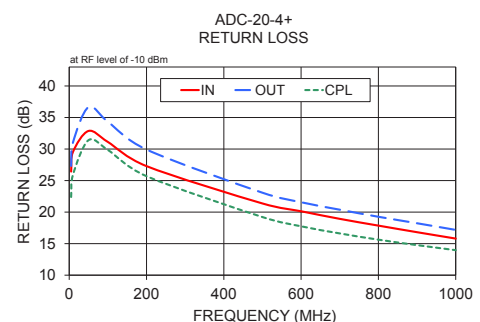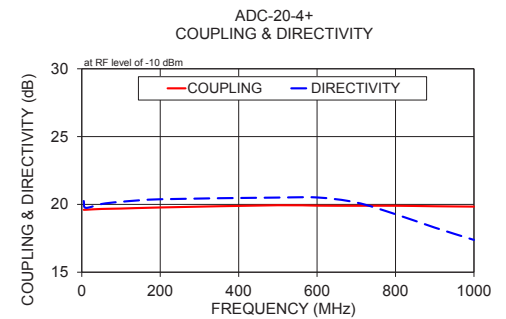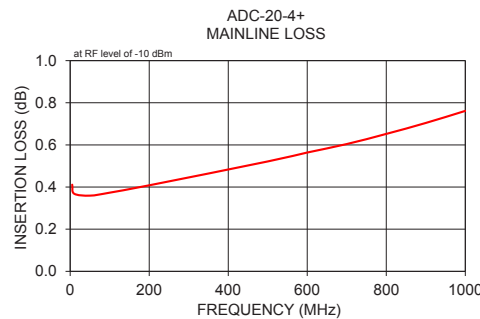

### Electrical Schematic

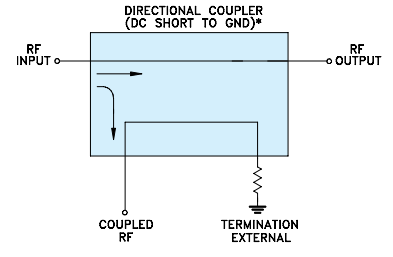

\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.

Notes  
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)

