

INTRODUCE:

HVGT high voltage silicon rectifier diodes is made of high quality silicon wafer chip and high reliability epoxy resin sealing structure, and through professional testing equipment inspection qualified after to customers.

FEATURES:

1. Fast switching.
2. High reliability.
3. High current capability.
4. Conform to RoHS and SGS.
5. Epoxy resin molded in vacuumHave anticorrosion in the surface.

APPLICATIONS:

1. Rectifier for high voltage power supply.
2. High voltage transformer rectifier.
3. Doubler rectifier circuit.
4. Accelerator power supply.

MECHANICAL DATA:

1. Case: epoxy resin molding.
2. Terminal: welding axis.
3. Net weight: 0.4 grams (approx).

SHAPE DISPLAY:




SIZE: (Unit:mm)

HVGT NAME: DO-15

DO-15 Series

Lead Diameter 0.9mm

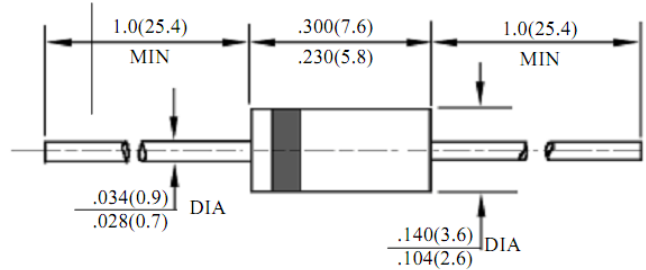

Unit: inches / mm


MAXIMUM RATINGS AND CHARACTERISTICS: (Absolute Maximum Ratings)

Items	Symbols	Condition	Data Value	Units
Repetitive Peak Reverse Voltage	V_{RRM}	$T_A=25^{\circ}C$	4000	V
Maximum RMS Reverse Voltage	V_{RMS}	$T_A=25^{\circ}C$	2800	V
Maximum DC Blocking Voltage	V_R	$T_A=25^{\circ}C$	4000	V
Average Forward Current Maximum	I_o	$T_{OIL}=50^{\circ}C$	200	mA
Non-Repetitive Forward Surge Current	I_{FSM}	$T_A=25^{\circ}C$; 60Hz Half-Sine Wave; 8.3ms	30	A
Junction Temperature	T_j		150	$^{\circ}C$
Allowable Operation Case Temperature	T_c		-65~+150	$^{\circ}C$
Storage Temperature	T_{STG}		-65~+150	$^{\circ}C$


ELECTRICAL CHARACTERISTICS: $T_A=25^{\circ}C$ (Unless Otherwise Specified)

Items	Symbols	Condition	Data value	Units
Maximum Forward Voltage Drop	V_{FM}	at $25^{\circ}C$; at I_{FAVM}	6.5	V
Maximum Reverse Current	I_{R1}	at $25^{\circ}C$; at V_{RRM}	5.0	μA
	I_{R2}	at $100^{\circ}C$; at V_{RRM}	100	μA
Maximum Reverse Recovery Time	T_{RR}	at $25^{\circ}C$; $I_F=0.5I_R$; $I_R=I_{FAVM}$; $I_{RR}=0.25I_R$	500	nS
Junction Capacitance	C_j	at $25^{\circ}C$; $V_R=4.0V$; $f=1MHz$	30	pF

Forward Current Derating Curve

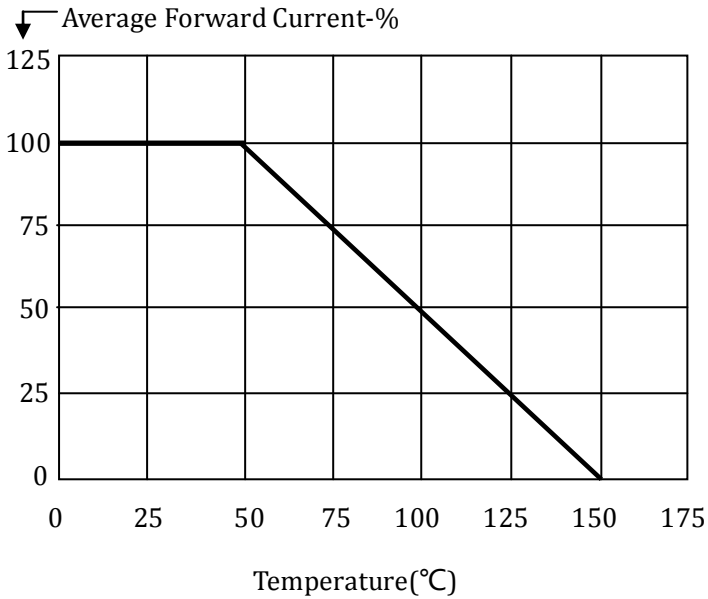


Reverse Recovery Measurement Waveform

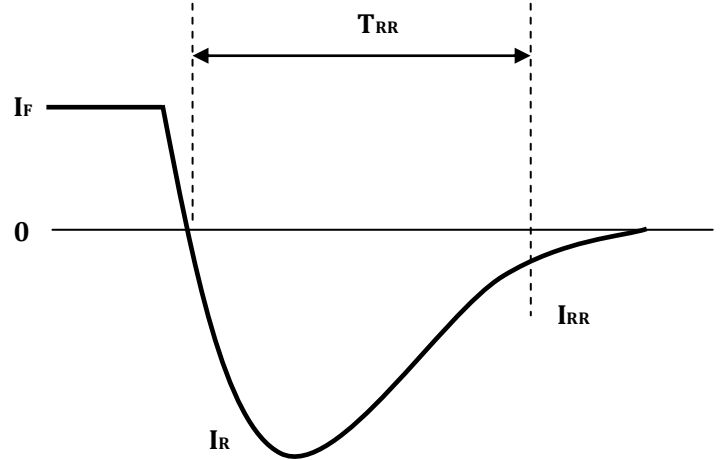

Typical data capture points: $I_F = 0.5I_R$, $I_R, I_{RR} = 0.25I_R$
 I_R is typically the rated average forward current maximum (I_{FAVM}) of the D.U.T

Non-Repetitive Surge Current

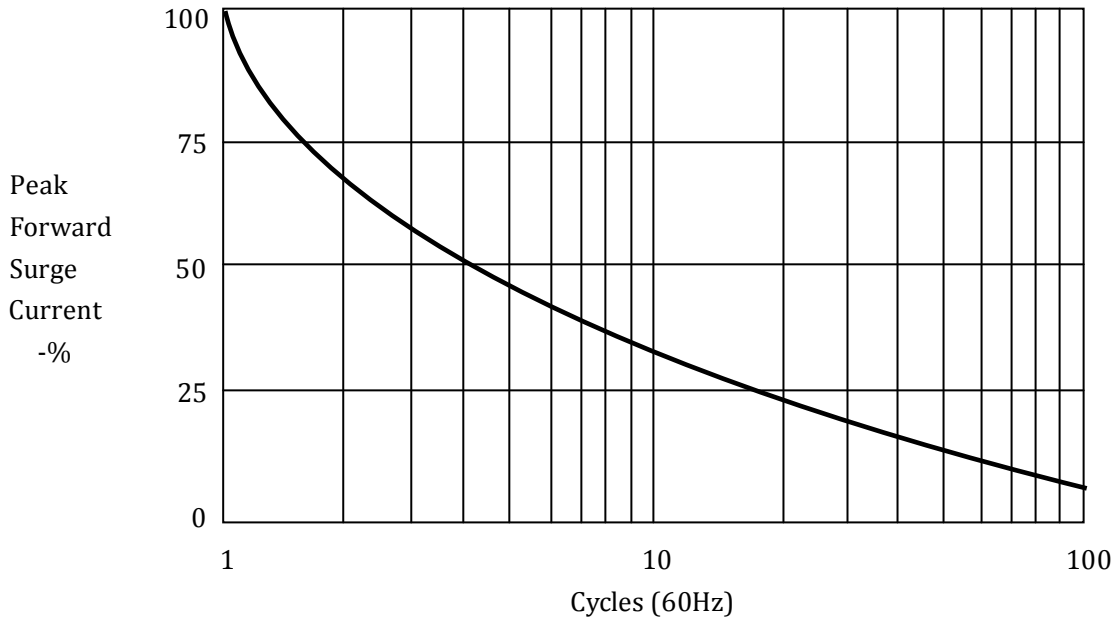


Marking	Type	Code	Cathode Mark
	R4000F	R4000F HVGT	


PACKING INFORMATION:

Tape size:

A=65.0mm
 B=52.0mm
 C=5.0mm
 G=6.0mm

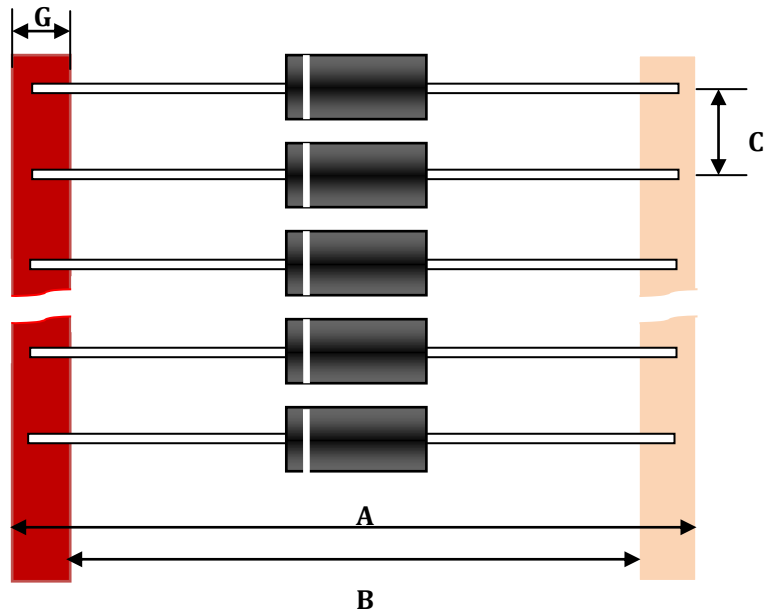

Carton packaging:

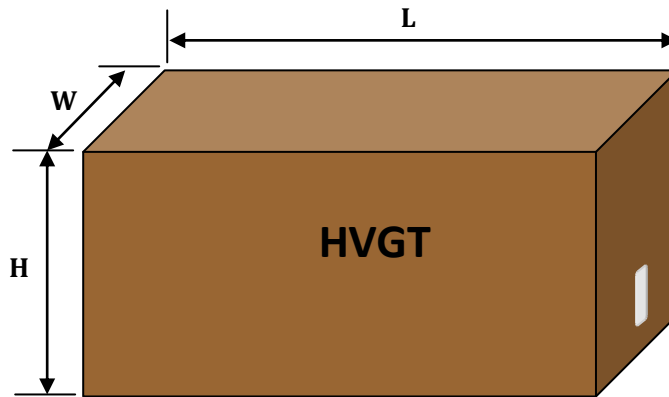

Box	Box size: (mm)	Quantity of packing: (pcs)	Gross weight: (kg)
Minimum packing box:	L260 x H145 x W80	3,000	1.20
Outside packed cartons:	L415 x H315 x W275	30,000	12.80