


SDB10300R-HAF

Surface Mount Schottky Barrier Rectifier

Features

- Low Forward Voltage Drop
- Reliable High Temperature Operation
- Halogen and Antimony Free(HAF),
RoHS compliant

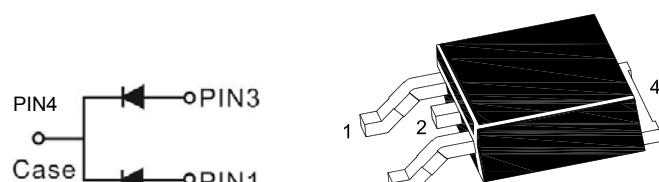

TO-252 Plastic Package

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$ unless otherwise specified


Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	300	V
Working Peak Reverse Voltage	V_{RWM}	300	V
DC Blocking Voltage	V_R	300	V
Average Forward Current	$I_{F(AV)}$	10	A
Peak Forward Surge Current at 1/2 60 Hz	I_{FSM}	120	A
Peak repetitive reverse current at $t_p = 2 \mu\text{s}$, 1 KHz	I_{RRM}	1	A
Typical Thermal Resistance Junction to Case	$R_{\theta JC}$	6	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_j	- 65 to + 175	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to + 175	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$ unless otherwise specified


Parameter	Symbol	Max.	Unit
Forward Voltage ¹⁾ at $I_F = 5 \text{ A}$, at $I_F = 5 \text{ A}$, $T_j = 125^\circ\text{C}$	V_F	0.92 0.8	V
Reverse Current ¹⁾ at $V_R = 300 \text{ V}$ at $V_R = 300 \text{ V}$, $T_j = 125^\circ\text{C}$	I_R	100 10	μA mA

¹⁾ Pulse width < 300 μs , Duty cycle < 2%.


SDB10300R-HAF

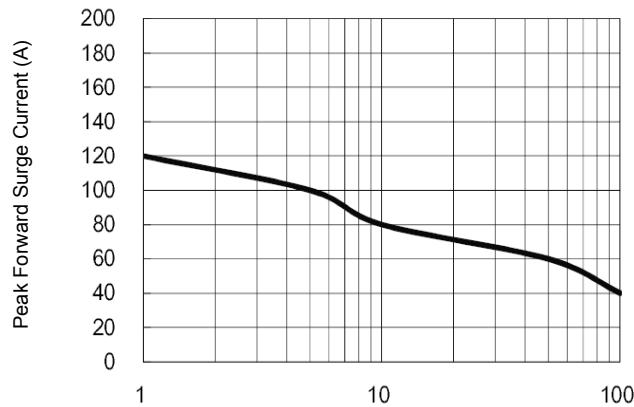


Number of Cycles at 60 Hz
Figure 1. Maximum Repetitive Surge Current

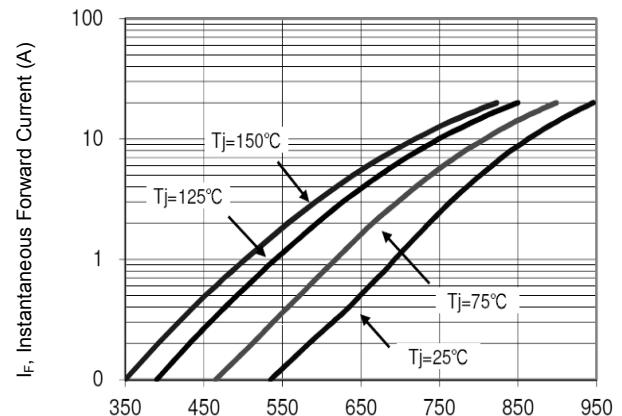

V_F, Instantaneous Forward Voltage (mV)
Figure 2. Typical Forward Voltage

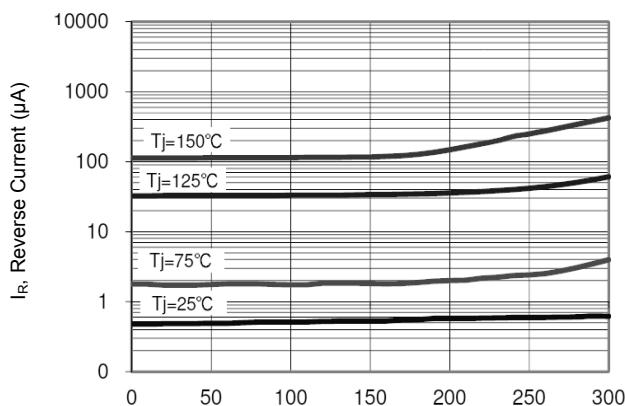

V_R, Reverse Voltage (V)
Figure 3. Typical Reverse Current

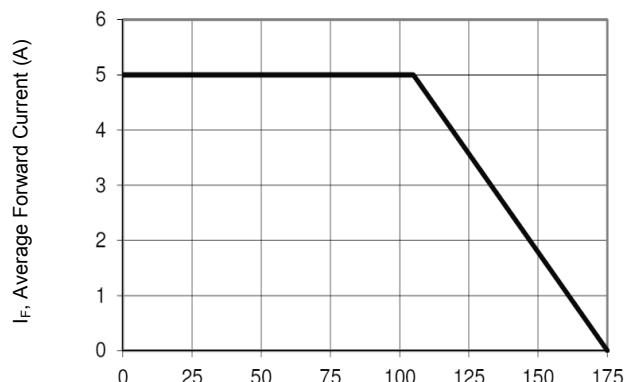


T_C, Case Temp (°C)
Figure 4. Current Derating, Case

TOP DYNAMIC


Dated: 01/12/2016 Rev: 01

SDB10300R-HAF

Package Outline Dimensions (Units: mm)

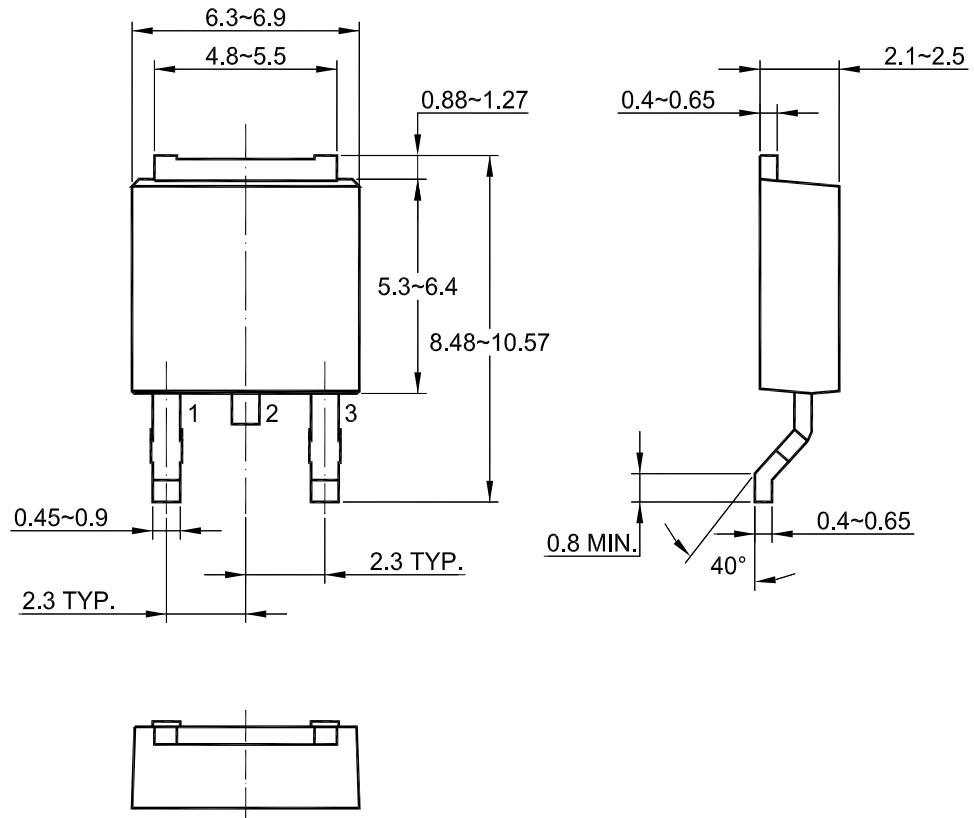

Recommended Soldering Footprint

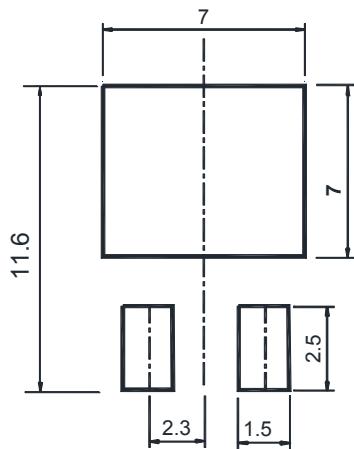

TOP DYNAMIC

Dated: 01/12/2016 Rev: 01