

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1510621707](#)
Status: **Active**
Overview: [Milli-Grid™ Connector System](#)
Description: 2.00mm Pitch Milli-Grid™ Header, Surface Mount, Single Row, Vertical, 0.75µm Gold (Au) Plating, without Peg, with Pick and Place Cap, 7 Circuits, Lead-free

Documents:

[Drawing \(PDF\)](#) [Packaging Specification PK-151062-0001 \(PDF\)](#)
[Product Specification PS-151062-0001-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General


Product Family	PCB Headers
Series	151062
Application	Signal, Wire-to-Board
Comments	See Product Specification for maximum current rating by wire AWG
Overview	Milli-Grid™ Connector System
Product Name	Milli-Grid™
UPC	889056696050

Physical

Breakaway	No
Circuits (Loaded)	7
Circuits (maximum)	7
Color - Resin	Black
Durability (mating cycles max)	25
First Mate / Last Break	No
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold over Nickel
Material - Plating Termination	Tin over Nickel
Material - Resin	Liquid Crystal Polymer
Net Weight	693.846/mg
Number of Rows	1
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Tube
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	0.750µm
Plating min - Termination	2.000µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Robotic Placement	Pick and Place Cap
Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40°C to +70°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	2.5A
Voltage - Maximum	125V AC

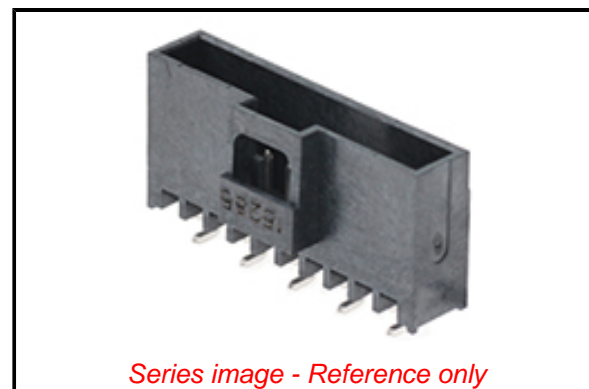

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/01/2017 (12
January 2017)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[151062 Series](#)

Mates With

Milli-Grid™ Receptacle Housing [151100](#)

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Packaging Specification	PK-151062-0001
Product Specification	PS-151062-0001-001
Sales Drawing	SD-151062-0001

This document was generated on 07/14/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION