



156AXZ035M

SURFACE MOUNT

Parts are RoHS compliant

Date code when parts became RoHS: 23

APPLICATIONS: switching power supplies, Input filtering

ELECTRICAL SPECIFICATIONS

Capacitance: 15 uF

Dissipation Factor: 0.12 Max at 120 Hz and 20°C

Temperature Range: -55°C to +105°C

ESR: 13.263 Ohms Max at 20°C and 120 Hz

Impedance: 0.76Ohms100 kHz20°C

Tolerance: -20 %, +20 %

WVDC: 35 Volts DC

SVDC: 44 Volts DC

Ripple Current: 150 mA at 100 kHz and 20°C

Impedance Ratios:-40°C/20°C 2 and -55°C/20°C - 3

Leakage Current: .01CV or 3uA, whichever is greater
5.3 uA after 2 Minutes

Load Life: 2000 hours at 105°C with 100 % of rated voltage and with 0 % of rated ripple current

Capacitance Change: ≤30% of initial measured value

Dissipation Factor: ≤300% of maximum specified value

Leakage Current: ≤100% of maximum specified value

Frequency Multipliers:

50 HZ	120 HZ	400 HZ	1 KHZ	10 KHZ	100 KHZ
0.64	0.5	0.64	0.83	0.83	1

Temperature Multipliers:

45°C	60°C	70°C	65°C	75°C	85°C	105°C	125°C
2	1.9	1.7	1.8	1.4	1.4	1	0

PHYSICAL DIMENSIONS

Diameter (D): 5 mm + 0.5 mm


Length (L): 5.4 mm + 0.2 mm

Lead Spacing (S): 1.4 mm +/- 0.2 mm

Lead Wire Diameter (d): 0.65 mm +/- 0.15 mm

Lead Length: 2.1 mm +/- 0.2 mm

Lead Finish: Matte Tin

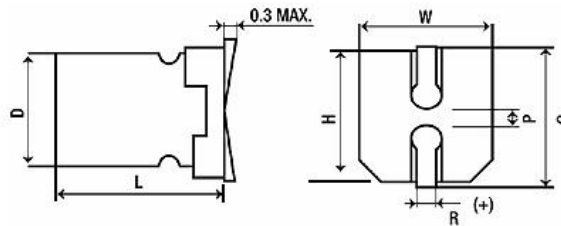

3757 W. Touhy Ave. Lincolnwood, IL 60712 (847) 675-1760 FAX (847) 673-2850
Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.ilcap.com.hk
© Copyright 2017 Illinois Capacitor. A division of Cornell Dublier, All Rights Reserved