

D






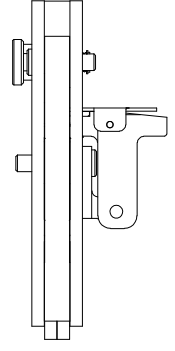


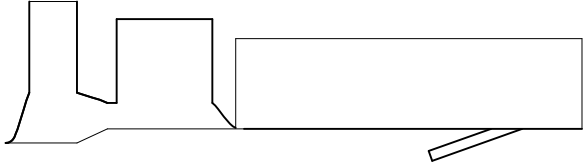
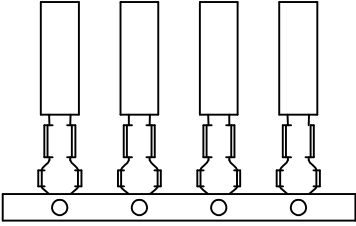
2. AMP, CERTI-CRIMP, and FASTON
ARE TRADEMARKS.

A

CERTI-CRIMP II DATA SHEET

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES (TE). IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN TE PERSONNEL, WITHOUT AUTHORIZATION FROM TE. (<www.te.com>)

THIS DRAWING IS A CONTROLLED DOCUMENT.
 THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TFCO. IT IS NOT TO BE DISCLOSED TO ANY OTHER PARTY WITHOUT THE WRITTEN AUTHORIZATION OF TFCO. ANY REPRODUCTION OR TRANSMISSION OF THIS INFORMATION IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN AUTHORIZATION OF TFCO, IS PROHIBITED.
 3308-8 (3/11)

TOOL NUMBER  -1  -3 	WIRE SIZE mm ² [AWG] 	INSULATION DIAMETER mm [in.] 	INSULATION ADJUSTER 	FLIP LOCATOR 	STRIP LENGTH mm [in.] 	CRIMP HEIGHT mm [in.] 	CONTACT PART NUMBERS 		CONTACT DESCRIPTION	APPLIC. SPECIF.
							LOOSE PIECE 	STRIP FORM 		
2063848-1 2063848-3	0.20-0.35 [24-22] 0.50-0.56 [20]	1.50-2.55 [.059-.100] 1.95-2.60 [.077-.102]	NO	NO	3.50 ± 0.50 [.138 ± .020]	0.89-0.99 [.035-.039] 1.00-1.10 [.039-.043]	170203-2	-	187 FASTON contacts	114-5013
2063760-1 2063760-3	0.20-0.35 [24-22] 0.50-0.53 [20]	1.50-1.90 [.059-.075] 2.00-2.70 [.079-.106]				0.90-1.05 [.035-.041] 1.00-1.13 [.039-.047]	170330-()	170324-()	.187 SERIES POSITIVE LOCK RECEPTACLE	114-5041

-  LIST OF APPLIED CONTACT PART NUMBERS MAY NOT BE COMPLETE AND IS SUBJECT TO CHANGE. FOR CURRENT INFORMATION ON TERMINAL PART NUMBERS, CONTACT THE TOOLING ASSISTANCE CENTER : 1-800-722-1111.
2. AMP, CERTI-CRIMP, and FASTON ARE TRADEMARKS.
-  -1 IS A CERTICRIMP II HAND TOOL ASSEMBLY.
-3 IS A CERTICRIMP II HEAD SUB-ASSEMBLY.
4. THE HAND TOOL INSTRUCTION SHEET, ALSO KNOWN AS AN "IS", FOR MOST CERTI-CRIMP II TOOLS USE IS 408-8547. IF THE TOOL HAS A FLIP LOCATOR USE IS 408-10414.

CERTI-CRIMP II DATA SHEET

DWN	M. YOUNGER	21FEB2012	MATERIAL	-	HEAT TREAT	-					
CHK	B.A.WOLFE	22FEB2012	 TE Connectivity								
APVD	B.A. WOLFE	22FEB2012									
NAME											
CERTI-CRIMP II TOOL DATA SHEET FASTON & POSITIVE LOCK CONTACT FAMILY											
SCALE	-	SIZE	A1	DRAWING NO	1583005	SHEET	2	OF	2	REV	D5

P	LTR	REVISION RECORD	DATE	DWN	APVD	SURFACE TEXTURE	
-	SEE SHEET 1	-	-	-	-	-	-