

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1700712012](#)
Status: **Active**
Overview: High-Speed Pluggable I/O Solutions
Description: zSFP+ Stacked Ganged Assembly with Elastomeric Gasket, 2-by-2 with Inner Light Pipes, 80 Circuits

Documents:

3D Model	Product Specification TS-170071-0001-001 (PDF)
Drawing (PDF)	Application Specification AS-170071-0002-001 (PDF)
Product Specification PS-170071-0001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

UL E29179

General


Product Family	I/O Connectors
Series	170071
Application	Module-to-Board
Component Type	Receptacle
Electrical Model	Yes
Overview	High-Speed Pluggable I/O Solutions
Product Name	zSFP Plus, zSFP+
Type	N/A
UPC	884982402157

Physical

Circuits (Loaded)	80
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Gender	Female
Lock to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	50.514/g
Number of Rows	2
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	2.36mm
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	4
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact 0.5A

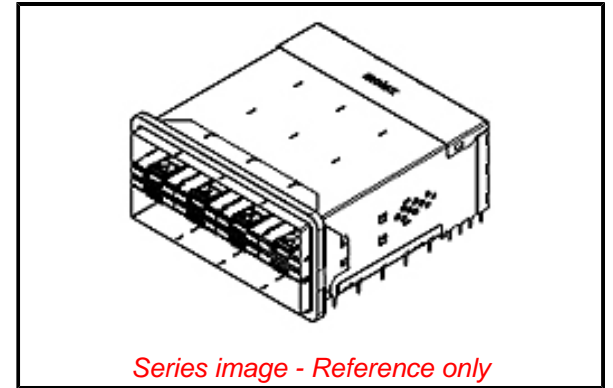

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ED/30/2017 (7 July
2017)

Halogen-Free

Status

Not Low-Halogen

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[170071](#) Series

Shield Type	N/A
Shielded	Yes
Voltage - Maximum	30V AC

Solder Process Data

Lead-free Process Capability	N/A
------------------------------	-----

Material Info**Reference - Drawing Numbers**

Application Specification	AS-170071-0002-001
Electrical Model Document	EE-170071-0001
Product Specification	PS-170071-0001, TS-170071-0001-001
S-Parameter Model	SP-170426-1000
Sales Drawing	SD-170071-0002, SD-170071-0005
Symbol/Footprint Data	SYM-170071-0001

This document was generated on 11/30/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION