



浩畅半导体
www.szhaochang.cn

DB101S THRU DB107S

SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS

Voltage Range - 50 to 1000 Volts Current - 1.0 Ampere

产 品 规 格 书

承 认 书

客户确认：

公司签章：

部门	工程部	品保部	采购部	
签名				
日期				




DB101S THRU DB107S

SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS

Voltage Range - 50 to 1000 Volts Current - 1.0 Ampere

DBS

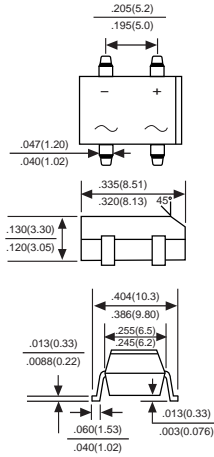

FEATURES

- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ High temperature soldering guaranteed:
- ◆ 250* / 10 seconds / 0.375" (9.5mm) led length at 5 lbs., (2.3kg) tension
- ◆ Small size, simple installation
Leads solderable per MIL-STD-202, Method 208
- ◆ High surge current capability

MECHANICAL DATA

Case: Molded plastic body
Terminals: Plated leads solderable per MIL-STD-750, Method 2026
Polarity: Polarity symbols marked on case
Mounting Position: Any
Weight: 0.02 ounce, 0.4 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25* ambient temperature unless otherwise specified.
 Single phase half-wave 60Hz, resistive or inductive load, For capacitive load derate current by 20%.

	SYMBOLS	DB101S	DB102S	DB103S	DB104S	DB105S	DB106S	DB107S	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at $T_A=40^*$	$I_{F(AV)}$	1.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50							Amps
Maximum instantaneous forward voltage drop per bridge element at 1.0A	V_F	1.1							Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^*$ $T_A=125^*$	I_R	10 500							μA μA
Operating temperature range	T_J	-55 to +150							$^{\circ}C$
storage temperature range	T_{STG}	-55 to +150							$^{\circ}C$

NOTES: DBS for surface mount package.

RATINGS AND CHARACTERISTIC CURVES DB101S THRU DB107S

