

### 10.0 AMP SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

#### FEATURES

- \* Ideal for surface mount applications
- \* Easy pick and place
- \* Built-in strain relief
- \* Low forward voltage drop

#### MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Metallurgically bonded construction
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.093 grams


#### VOLTAGE RANGE

45 to 200 Volts

#### CURRENT

10.0Ampere

#### DO-214AA(SMB)

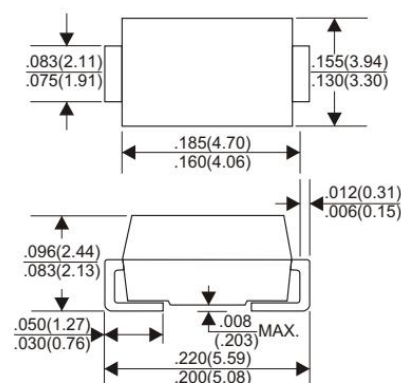

Dimensions in inches and (millimeters)

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25 C ambient temperature unless otherwise specified.  
 Single phase half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

TYPE NUMBER	SS1045	SS1060	SS10100	SS10150	SS10200	UNITS
Maximum Recurrent Peak Reverse Voltage	45	60	100	150	200	V
Maximum RMS Voltage	32	42	70	105	140	V
Maximum DC Blocking Voltage	45	60	100	150	200	V
Maximum Average Forward Rectified Current	10.0					A
See Fig. 1						
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	175					A
Maximum Instantaneous Forward Voltage at 10.0A	0.55	0.7	0.85	0.92		V
Maximum DC Reverse Current Ta=25 C	0.1		0.02			µA
at Rated DC Blocking Voltage Ta=125 C						
	5		2			mA
Typical Junction Capacitance (Note1)	400					pF CA
Typical Thermal Resistance R JA (Note 2)	16					W
Operating Temperature Range TJ	— 55 to +150					°C
Storage Temperature Range TSTG	55 to +150					°C

#### NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Lead.

## RATING AND CHARACTERISTIC CURVES (SS1045 THRU SS10200)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

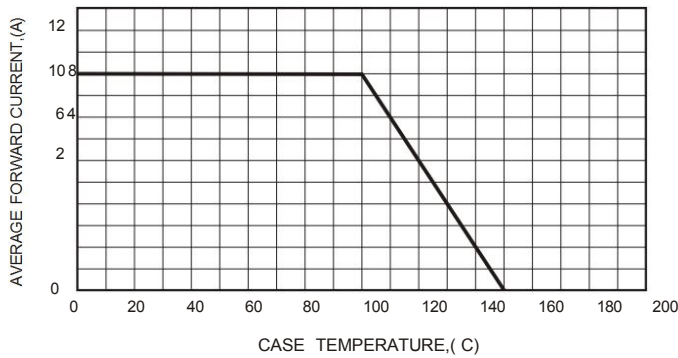


FIG.2-TYPICAL FORWARD CHARACTERISTICS

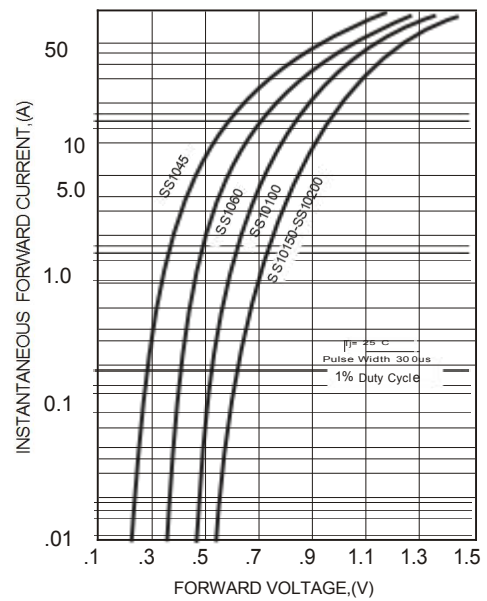


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

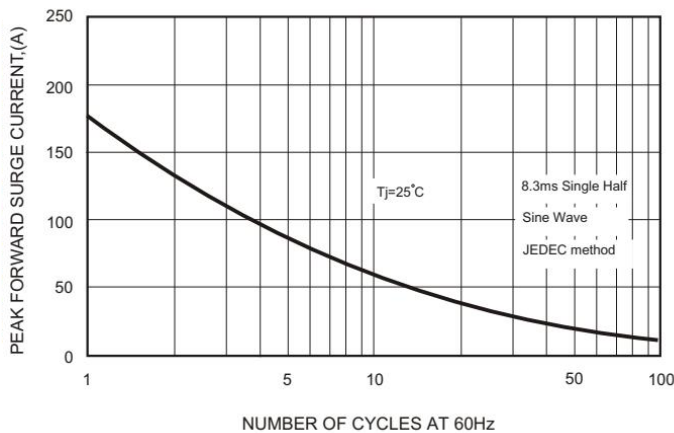


FIG.4-TYPICAL JUNCTION CAPACITANCE

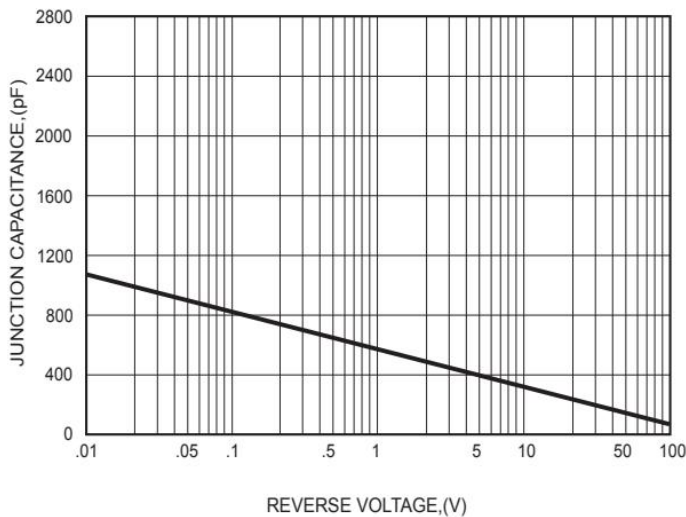


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

