


800V N-CHANNEL ENHANCEMENT MODE MOSFET

MAIN CHARACTERISTICS

I_D	7A
V_{DSS}	800V
R_{DS(on)-typ(@V_{GS}=10V)}	<1.9Ω (Type:1.4 Ω)

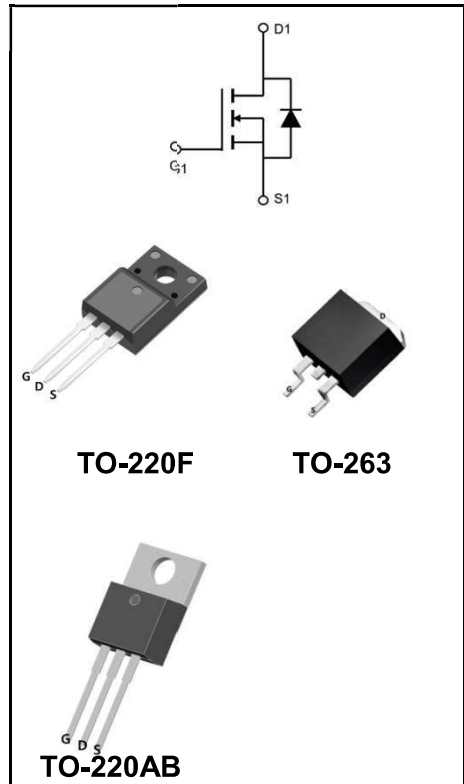

Features

- ◆Fast Switching
- ◆Low ON Resistance
- ◆Low Gate Charge
- ◆100% Single Pulse avalanche energy Test
- ◆LeadfreeincomplywithEURoHS2011/65/EUdirectives

Mechanical Data

- ◆Case: Molded plastic
- ◆Mounting Position: Any
- ◆Molded Plastic: UL Flammability Classification Rating 94V-0
- ◆Solder bath temperature275℃maximum,10s per JESD22-106

Product Specification Classification

Part Number	Package	Marking	Pack
YFW7N80AT	TO-220AB	YFW 7N80AT XXXXX	1000PCS/Box
YFW7N80AF	TO-220F(0.5mm)	YFW 7N80AF XXXXX	1000PCS/Box
YFW7N80AS-G	TO-263	YFW 7N80AS XXXXX	1000PCS/Box
YFW7N80AS	TO-263	YFW 7N80AS XXXXX	800PCS/Reel

Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Symbols	Value			Units
		220AB	220F	263	
Drain-Source Voltage	V_{DS}	800			V
Gate-Source Voltage	V_{GS}	±30			V
Continue Drain Current-Continuous (TC = 25°C)	I_D	7			A
-Continuous (TC = 100°C)		4			
Pulsed Drain Current (Note1)	I_{DM}	28			A
Power Dissipation	P_D	140	48	140	W
-Derate above 25°C		1.12	0.38	1.25	W/°C
Single Pulse Avalanche Energy (Note2)	E_{AS}	590			mJ
Avalanche Current (Note 1)	I_{AR}	7			A
Repetitive Avalanche Energy (Note 1)	E_{AS}	14			mJ
Operating Temperature Range	T_J	150			°C
Storage Temperature Range	T_{STG}	-55 to +150			°C
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.89	2.8	0.89	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	62.5	62.5	°C/W

Maximum Ratings at Tc=25°C unless otherwise specified





Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	$V_{GS} = 0 V, I_D = 250 \mu A$	BV_{DSS}	800	-	-	V
Drain-Source Leakage Current	$V_{DS} = 800 V, V_{GS} = 0 V$	I_{DSS}	-	-	1	uA
	$V_{DS} = 640 V, T_c = 125^\circ C$		-	-	10	
Gate Leakage Current	$V_{GS} = \pm 30 V, V_{DS} = 0 V$	I_{GSS}	-	-	±100	nA
Gate-Source Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250 \mu A$	$V_{GS(th)}$	3	-	5	V
Drain-Source On-State Resistance	$V_{GS} = 10 V, I_D = 3.5 A$	$R_{DS(on)}$	-	1.4	1.9	Ω
Forward Transconductance(Note3)	$V_{DS} = 40 V, I_D = 3.5 A$	g_{fs}	-	5	-	S
Input Capacitance	$V_{GS} = 0 V, V_{DS} = 25 V, f = 1MHz$	C_{iss}	-	1178	-	pF
Output Capacitance		C_{oss}	-	133	-	
Reverse Transfer Capacitance		C_{rss}	-	12	-	
Turn-on Delay Time	$I_D = 7 A, V_{DD} = 400 V, R_G = 25\Omega(\text{Note3,4})$	$td(ON)$	-	34	-	nS
Rise Time		tr	-	35	-	
Turn-Off Delay Time		$td(OFF)$	-	80	-	
Fall Time		tf	-	32	-	
Total Gate Charge	$I_D = 7 A, V_{DD} = 640V, V_{GS} = 10 V(\text{Note3,4})$	Q_G	-	50	-	nC
Gate to Source Charge		Q_{GS}	-	6.1	-	
Gate to Drain Charge		Q_{GD}	-	28	-	

Source-Drain Diode Characteristics at Ta=25°C unless otherwise specified





Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Maximum Continuous Drain-Source Diode Forward Current		I_S	-	-	7	A
Maximum Pulsed Drain-Source Diode Forward Current		I_{SM}	-	-	28	A
Drain-Source Diode Forward Voltage	I _{SD} = 7 A	V_{SD}	-	-	1.4	V
Reverse Recovery Time	I _{SD} = 7 A, V _{GS} = 0 V,	trr	-	320	-	nS
Reverse Recovery Charge	dI _F / dt = 100 A/μ(Note3)	Q_{rr}	-	2.4	-	uC

- Note:
1. Repetitive Rating: Pulse width limited by maximum junction temperature.
 2. I_{AS} = 7 A, V_{DD} = 50 V, L = 25mH, R_G = 25Ω, starting T_J = 25°C.
 3. ulse test: Pulse Width ≤ 300 μ s, Duty Cycle ≤ 2%.
 4. Essentially Independent of Operating Temperature.

Ratings and Characteristic Curves

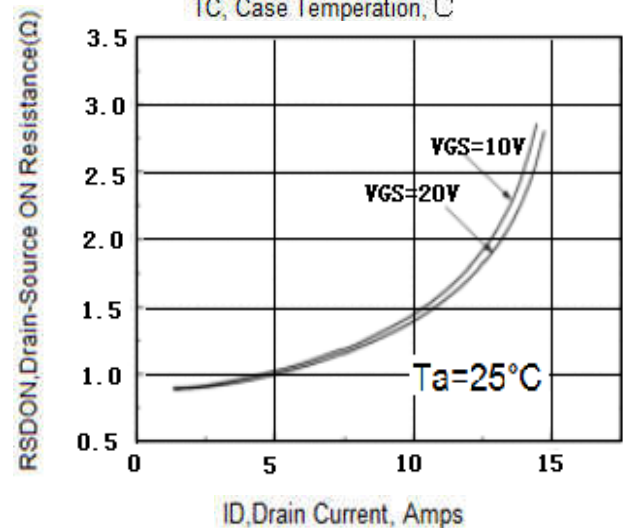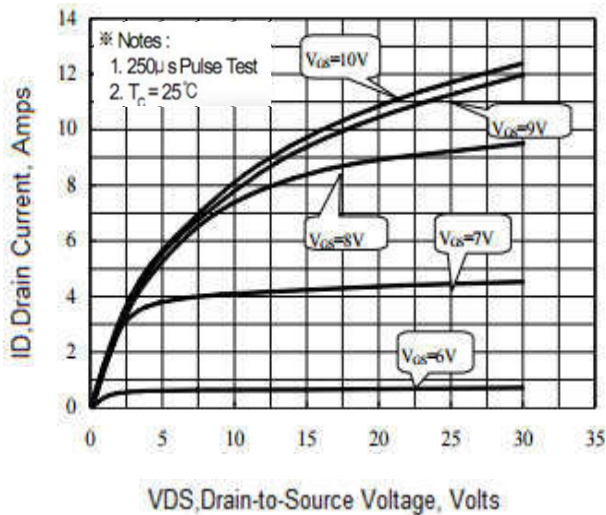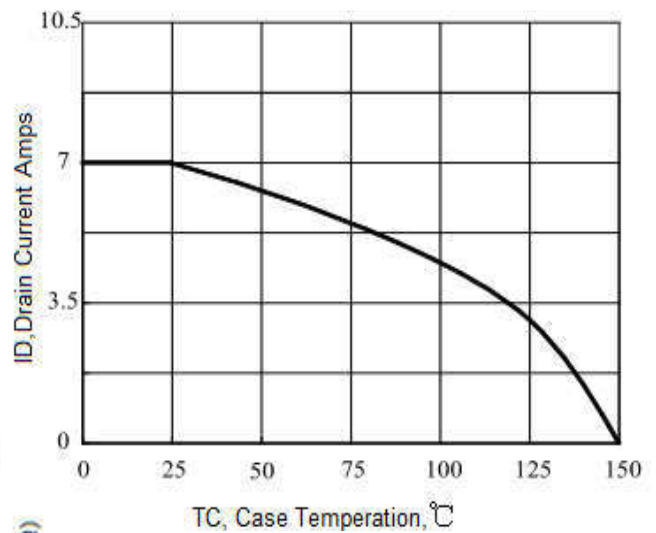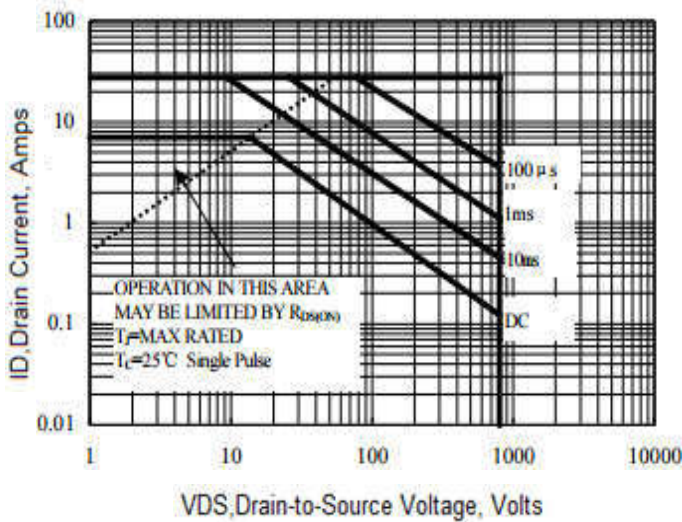

Ratings and Characteristic Curves

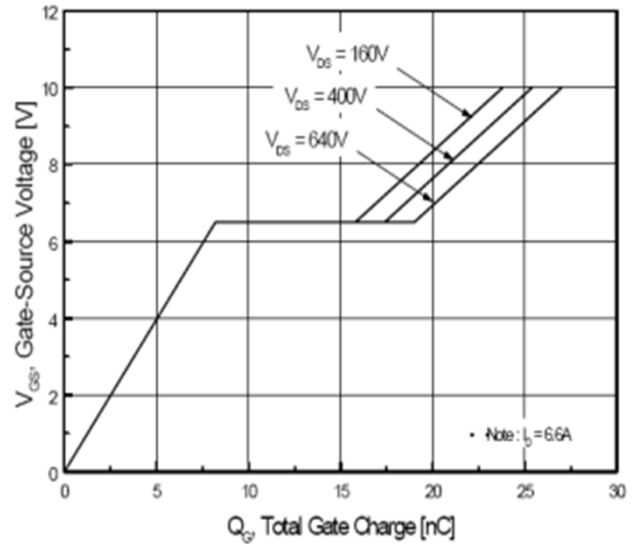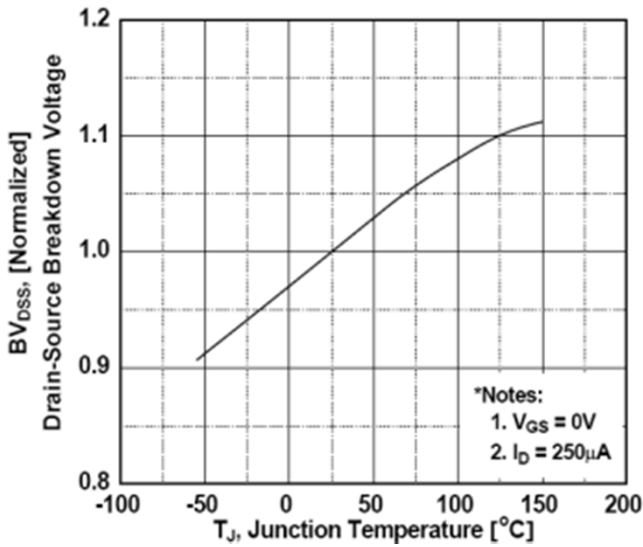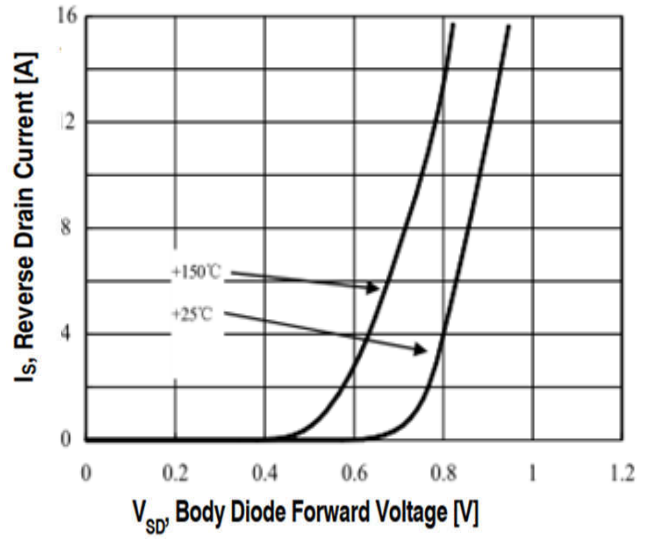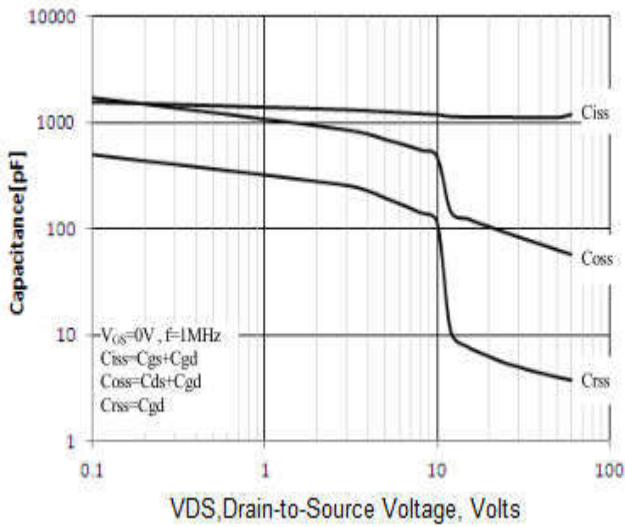

Package Outline Dimensions Millimeters

TO-220AB

	Dim.	Min.	Max.
	A	10.15	10.35
	B	2.65	2.95
	C	3.70	3.90
	D	28.5	29.5
	E	1.30	1.45
	F	6.35	6.55
	G	2.9	3.3
	H	15.0	16.0
	I	0.38	0.42
	J	4.45	4.55
	K	1.25	1.35
	L	Typ 5.08	
	M	Typ 2.54	
	N	3.1	3.3
O	0.76	0.84	
All Dimensions in millimeter			

TO-220F

	Dim.	Min.	Max.
	A	9.95	10.25
	B	2.95	3.25
	C	1.25	1.45
	D	12.95	13.25
	E	0.50	0.65
	F	3.1	3.3
	G	1.30	1.45
	H	Typ 2.54	
	I	Typ 5.08	
	J	4.60	4.75
	K	2.50	2.65
	L	6.35	6.55
	M	15.4	16.0
	N	2.75	3.05
O	0.48	0.52	
P	0.76	0.84	
All Dimensions in millimeter			

Package Outline Dimensions Millimeters

TO-263

Dim.	Min.	Max.
A	10.1	10.2
B	7.4	7.6
C	1.3	1.5
D	0.55	0.75
E	5.0	6.0
F	1.4	1.6
G	0.78	0.86
H	1.2	1.3
I	Typ2.54	
J	8.4	8.6
K	4.45	4.55
L	1.25	1.35
M	0.02	0.1
N	2.4	2.8
O	0.36	0.40
All Dimensions in millimeter		