

VOLTAGE RANGE: 3.3 - 240V
POWER: 1.5Watts


Features

- Complete Voltage Range 3.3 to 240 Volts
- High peak reverse power dissipation
- High reliability
- Low leakage current



Mechanical Data

- Case: SMA/DO-214AC, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.064 grams (approx.)

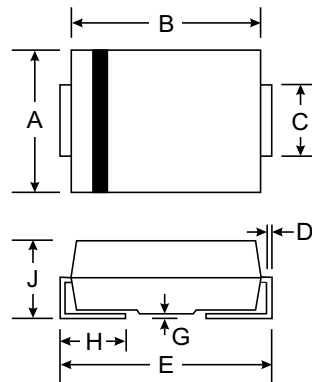


| SMA(DO-214AC) | | |
|----------------------|------|------|
| Dim | Min | Max |
| A | 2.29 | 2.92 |
| B | 4.00 | 4.60 |
| C | 1.27 | 1.63 |
| D | 0.15 | 0.31 |
| E | 4.80 | 5.59 |
| G | 0.10 | 0.20 |
| H | 0.76 | 1.52 |
| J | 2.01 | 2.62 |
| All Dimensions in mm | | |

Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise specified

| Rating | Symbol | Value | Unit |
|---|-----------------|---------------|----------------------------|
| DC Power Dissipation @ $T_L = 75^\circ\text{C}$ | P_D | 1.5 | W |
| Measured zero lead length(1" square copper pad, FR-4 board) Derate above 75°C | | 20 | $\text{mW}/^\circ\text{C}$ |
| Thermal Resistance Junction to Lead | $R_{\theta JL}$ | 50 | $^\circ\text{C}/\text{W}$ |
| DC Power Dissipation @ $T_a = 25^\circ\text{C}$ (FR-4 board) Derate above 25°C | P_D | 0.5 | W |
| Thermal Resistance Junction to Ambient | $R_{\theta JA}$ | 250 | $^\circ\text{C}/\text{W}$ |
| Maximum Forward Voltage at $I_F = 200\text{ mA}$ | V_F | 1.5 | V |
| Operating Junction and Storage Temperature Range | T_J, T_{STG} | - 65 to + 150 | $^\circ\text{C}$ |

Fig. 1 POWER TEMPERATURE DERATING CURVE

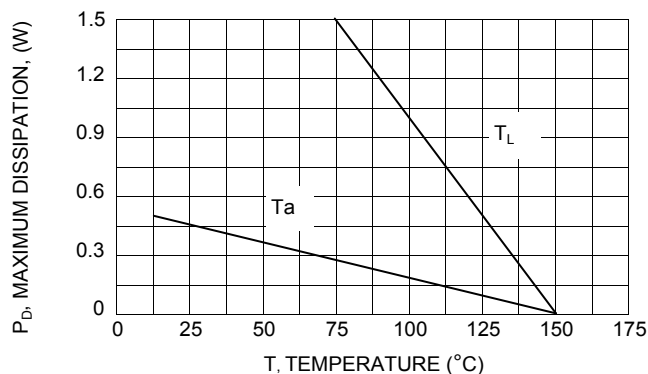



ELECTRICAL CHARACTERISTICS Rating at 25 °C ambient temperature unless otherwise specified

| TYPE | Nominal Zener Voltage | | Maximum Zener Impedance | | | Maximum Reverse Leakage Current | | Maximum DC Zener Current |
|-----------|-----------------------|-------|-------------------------|-----------|------|---------------------------------|-------|--------------------------|
| | Vz @ IzT | IzT | ZzT @ IzT | Zzk @ Izk | Izk | IR @ VR | | IzM |
| | (V) | (mA) | (Ω) | (Ω) | (mA) | (μA) | (V) | (mA) |
| 1SMA5913B | 3.3 | 113.6 | 10 | 500 | 1.0 | 100 | 1.0 | 454 |
| 1SMA5914B | 3.6 | 104.2 | 9.0 | 500 | 1.0 | 75 | 1.0 | 416 |
| 1SMA5915B | 3.9 | 96.1 | 7.5 | 500 | 1.0 | 25 | 1.0 | 384 |
| 1SMA5916B | 4.3 | 87.2 | 6.0 | 500 | 1.0 | 5.0 | 1.0 | 348 |
| 1SMA5917B | 4.7 | 79.8 | 5.0 | 500 | 1.0 | 5.0 | 1.5 | 319 |
| 1SMA5918B | 5.1 | 73.5 | 4.0 | 350 | 1.0 | 5.0 | 2.0 | 294 |
| 1SMA5919B | 5.6 | 66.9 | 2.0 | 250 | 1.0 | 5.0 | 3.0 | 267 |
| 1SMA5920B | 6.2 | 60.5 | 2.0 | 200 | 1.0 | 5.0 | 4.0 | 241 |
| 1SMA5921B | 6.8 | 55.1 | 2.5 | 200 | 1.0 | 50 | 5.2 | 220 |
| 1SMA5922B | 7.5 | 50.0 | 3.0 | 400 | 0.5 | 50 | 6.0 | 200 |
| 1SMA5923B | 8.2 | 45.7 | 3.5 | 400 | 0.5 | 50 | 6.5 | 182 |
| 1SMA5924B | 9.1 | 41.2 | 4.0 | 500 | 0.5 | 50 | 7.0 | 164 |
| 1SMA5925B | 10 | 37.5 | 4.5 | 500 | 0.25 | 50 | 8.0 | 150 |
| 1SMA5926B | 11 | 34.1 | 5.5 | 550 | 0.25 | 50 | 8.4 | 136 |
| 1SMA5927B | 12 | 31.2 | 6.5 | 550 | 0.25 | 1.0 | 9.1 | 125 |
| 1SMA5928B | 13 | 28.8 | 7.0 | 550 | 0.25 | 1.0 | 9.9 | 115 |
| 1SMA5929B | 15 | 25.0 | 9.0 | 600 | 0.25 | 1.0 | 11.4 | 100 |
| 1SMA5930B | 16 | 23.4 | 10 | 600 | 0.25 | 1.0 | 12.2 | 93 |
| 1SMA5931B | 18 | 20.8 | 12 | 650 | 0.25 | 1.0 | 13.7 | 83 |
| 1SMA5932B | 20 | 18.7 | 14 | 650 | 0.25 | 1.0 | 15.2 | 75 |
| 1SMA5933B | 22 | 17.0 | 17.5 | 650 | 0.25 | 1.0 | 16.7 | 68 |
| 1SMA5934B | 24 | 15.6 | 19 | 700 | 0.25 | 1.0 | 18.2 | 62 |
| 1SMA5935B | 27 | 13.9 | 23 | 700 | 0.25 | 1.0 | 20.6 | 55 |
| 1SMA5936B | 30 | 12.5 | 26 | 750 | 0.25 | 1.0 | 22.8 | 50 |
| 1SMA5937B | 33 | 11.4 | 33 | 800 | 0.25 | 1.0 | 25.1 | 45 |
| 1SMA5938B | 36 | 10.4 | 38 | 850 | 0.25 | 1.0 | 27.4 | 41 |
| 1SMA5939B | 39 | 9.6 | 45 | 900 | 0.25 | 1.0 | 29.7 | 38 |
| 1SMA5940B | 43 | 8.7 | 53 | 950 | 0.25 | 1.0 | 32.7 | 34 |
| 1SMA5941B | 47 | 8.0 | 67 | 1000 | 0.25 | 1.0 | 35.8 | 31 |
| 1SMA5942B | 51 | 7.3 | 70 | 1100 | 0.25 | 1.0 | 38.8 | 29 |
| 1SMA5943B | 56 | 6.7 | 86 | 1300 | 0.25 | 1.0 | 42.6 | 26 |
| 1SMA5944B | 62 | 6.0 | 100 | 1500 | 0.25 | 1.0 | 47.1 | 24 |
| 1SMA5945B | 68 | 5.5 | 120 | 1700 | 0.25 | 1.0 | 51.7 | 22 |
| 1SMA5946B | 75 | 5.0 | 140 | 2000 | 0.25 | 1.0 | 56.0 | 20 |
| 1SMA5947B | 82 | 4.6 | 160 | 2500 | 0.25 | 1.0 | 62.2 | 18 |
| 1SMA5948B | 91 | 4.1 | 200 | 3000 | 0.25 | 1.0 | 69.2 | 16 |
| 1SMA5949B | 100 | 3.7 | 250 | 3100 | 0.25 | 1.0 | 76.0 | 15 |
| 1SMA5950B | 110 | 3.4 | 300 | 4000 | 0.25 | 1.0 | 83.6 | 13 |
| 1SMA5951B | 120 | 3.1 | 380 | 4500 | 0.25 | 1.0 | 91.2 | 12 |
| 1SMA5952B | 130 | 2.9 | 450 | 5000 | 0.25 | 1.0 | 98.8 | 11 |
| 1SMA5953B | 150 | 2.5 | 600 | 6000 | 0.25 | 1.0 | 114.0 | 10 |
| 1SMA5954B | 160 | 2.3 | 700 | 6500 | 0.25 | 1.0 | 121.6 | 9.0 |
| 1SMA5955B | 180 | 2.1 | 900 | 7000 | 0.25 | 1.0 | 136.8 | 8.0 |
| 1SMA5956B | 200 | 1.9 | 1200 | 8000 | 0.25 | 1.0 | 152.0 | 7.0 |
| 1SMA5957B | 240 | 1.5 | 1600 | 9000 | 0.25 | 1.0 | 182.4 | 6.0 |

Note :

(1) Suffix " B " indicates $\pm 5\%$ tolerance suffix " A " indicates $\pm 10\%$ tolerance.