

**Surface Mount Schottky Barrier Rectifier**
**Reverse Voltage - 20 to 200 V**
**Forward Current - 2 A**
**FEATURES**


- ◆ Metal silicon junction, majority carrier conduction
- ◆ For surface mounted applications
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

**MECHANICAL DATA**

- ◆ Case: DO-214AC/SMA
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 0.07g/0.002oz

**Absolute Maximum Ratings and Electrical characteristics**

Ratings at 25 ° ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

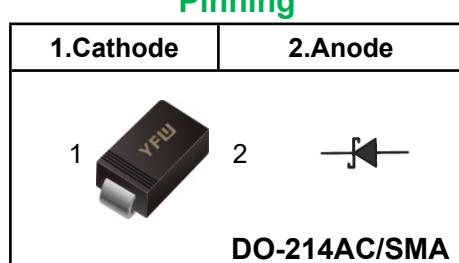


Parameter	Symbols	SS22	SS24	SS26	SS28	SS210	SS212	SS215	SS220	Units								
Maximum Repetitive Peak Reverse Voltage	<b>V<sub>RRM</sub></b>	20	40	60	80	100	120	150	200	<b>V</b>								
Maximum RMS voltage	<b>V<sub>RMS</sub></b>	14	28	42	56	70	84	105	140	<b>V</b>								
Maximum DC Blocking Voltage	<b>V<sub>DC</sub></b>	20	40	60	80	100	120	150	200	<b>V</b>								
Maximum Average Forward Rectified Current	<b>I<sub>F(AV)</sub></b>	2.0								<b>A</b>								
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed On Rated Load (JEDEC method)	<b>I<sub>FSM</sub></b>	50								<b>A</b>								
Maximum Instantaneous Forward Voltage at 2 A	<b>V<sub>F</sub></b>	0.55		0.70		0.85		0.90		<b>V</b>								
Maximum Instantaneous Reverse Current <small>T<sub>A</sub> = 25°C at Rated DC Reverse Voltage T<sub>A</sub> = 100°C</small>	<b>I<sub>R</sub></b>	0.5 5		0.3 3						<b>mA</b>								
Typical Junction Capacitance <sup>(1)</sup>	<b>C<sub>J</sub></b>	220		80						<b>pF</b>								
Typical Thermal Resistance <sup>(2)</sup>	<b>R<sub>θJA</sub></b>	80								<b>°C/W</b>								
Operating Junction Temperature Range	<b>T<sub>j</sub></b>	-55 ~ +150								<b>°C</b>								
Storage Temperature Range	<b>T<sub>stg</sub></b>	-55 ~ +150								<b>°C</b>								


(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.


**Fig.1 Forward Current Derating Curve**

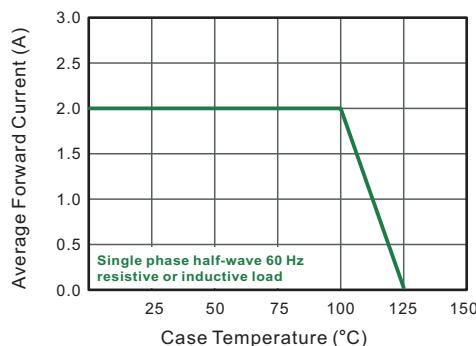


**Fig.2 Typical Reverse Characteristics**

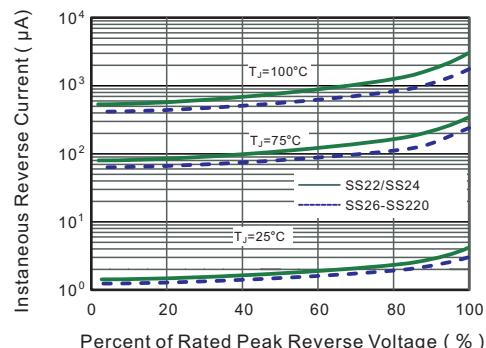


**Fig.3 Typical Forward Characteristic**

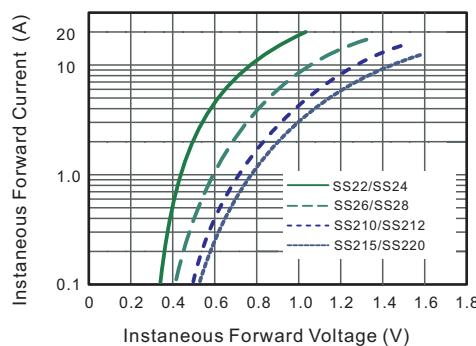


**Fig.4 Typical Junction Capacitance**

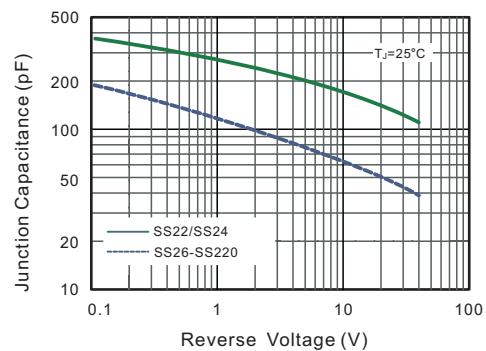

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

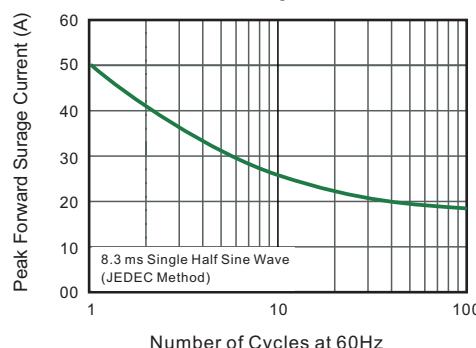


**Fig.6- Typical Transient Thermal Impedance**

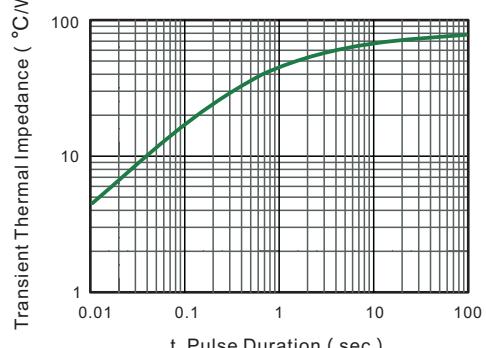

Package Outline


DO-214AC SMA

Plastic surface mounted package; 2leads

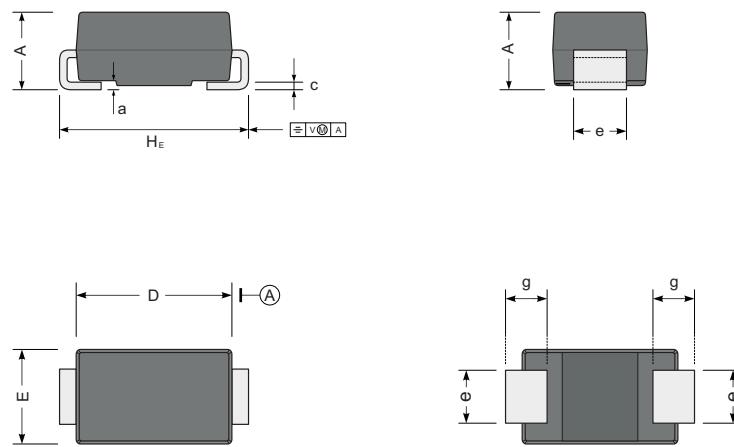

UNIT		A	D	E	H <sub>E</sub>	c	e	g	a
mm	max	2.42	4.5	2.80	5.2	0.31	1.6	1.5	0.3
	min	1.98	4.0	2.54	4.7	0.15	1.3	0.9	
mil	max	96	181	110	205	12	63	59	12
	min	78	157	100	185	6	51	35	

The recommended mounting pad size

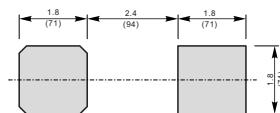

Unit :  $\frac{\text{mm}}{(\text{mil})}$

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
DO-214AC SMA	Tape/Reel, 11" reel	5000	EIA-481-1
	Tape/Reel, 7" reel	2000	EIA-481-1